Environment Canada
Environmental Protection Service

Environnement Canada
Service de la protection de l'environnement

ENVIRO
**T**echnical
**I**nformation for
**P**roblem
**S**pills

# TOLUENE

March 1984

Canada

85-0075/

## ENVIRONMENTAL AND TECHNICAL INFORMATION FOR PROBLEM SPILLS MANUALS

Environmental and Technical Information for Problem Spills (EnviroTIPS) manuals provide detailed information on chemical substances. This information is intended to assist the reader in designing countermeasures for spills and to assess their impact on the environment. The manual has been reviewed by the Technical Services Branch, Environmental Protection Service, and approved for publication. Approval does not necessarily signify that the contents reflect the views and policies of the Environmental Protection Service. Mention of trade names or commercial products does not constitute endorsement for use.

# TOLUENE

## ENVIRONMENTAL AND TECHNICAL INFORMATION FOR PROBLEM SPILLS

Technical Services Branch
Environmental Protection Programs Directorate
Environmental Protection Service
Environment Canada

March 1984

© Minister of Supply and Services Canada 1984
Cat. No. En 48-10/9-1984E
ISBN 0-662-13204-1
BEAUREGARD PRESS LIMITED

## FOREWORD

The Environmental and Technical Information for Problem Spills (EnviroTIPS) manuals were initiated in 1981 to provide comprehensive information on chemicals which were spilled frequently in Canada. The manuals are intended to be used by spill specialists for designing countermeasures for spills and to assess their effects on the environment. The major focus of TIPS manuals is environmental. The manuals are not intended to be used by first-response personnel because of the length and technical content; a number of manuals intended for first-response use are available. The information presented in this manual was largely obtained from literature review. Efforts were made, both in compilation and in review, to ensure that the information is as correct as possible. Publication of these data does not signify that these data are recommended by the Government of Canada, nor by any other group.

## ACKNOWLEDGEMENTS

The final version was prepared by the staff of the Environmental Protection Service who rewrote the text, drafted illustrations and incorporated all comments and additions.

The draft of this manual was prepared under a contract with Environment Canada by M.M. Dillon Consulting Engineers and Planners, Concord Scientific Corporation and Waterloo Engineering Limited. The level of detail present was made possible by the many individuals, organizations and associations who provided technical data and comments throughout the compilation and subsequent review.

TABLE OF CONTENTS


| | | Page |
|---|---|---|
| FOREWORD | | i |
| ACKNOWLEDGEMENTS | | i |
| LIST OF FIGURES | | vii |
| LIST OF TABLES | | ix |
| 1 | SUMMARY | 1 |
| 2 | PHYSICAL AND CHEMICAL DATA | 3 |
| 3 | COMMERCE AND PRODUCTION | 11 |
| 3.1 | Grades, Purities | 11 |
| 3.2 | Domestic Manufacturers | 11 |
| 3.3 | Other Suppliers | 11 |
| 3.4 | Major Transportation Routes | 11 |
| 3.5 | Production Levels | 12 |
| 3.6 | Manufacture of Toluene | 12 |
| 3.6.1 | General | 12 |
| 3.6.2 | Manufacturing Process | 12 |
| 3.7 | Major Uses in Canada | 13 |
| 3.8 | Major Buyers in Canada | 13 |
| 4 | MATERIAL HANDLING AND COMPATIBILITY | 15 |
| 4.1 | Containers and Transportation Vessels | 15 |
| 4.1.1 | Bulk Shipment | 15 |
| 4.1.1.1 | Railway tank cars | 15 |
| 4.1.1.2 | Tank motor vehicles | 18 |
| 4.1.2 | Packaging | 18 |
| 4.2 | Off-loading | 18 |
| 4.2.1 | Off-loading Equipment and Procedures for Railway Tank Cars | 18 |
| 4.2.2 | Specifications and Materials for Off-loading Equipment | 21 |
| 4.3 | Compatibility with Materials of Construction | 21 |
| 5 | CONTAMINANT TRANSPORT | 24 |
| 5.1 | General Summary | 24 |
| 5.2 | Leak Nomograms | 24 |
| 5.2.1 | Introduction | 24 |
| 5.2.2 | Nomograms | 25 |
| 5.2.2.1 | Figure 10: Percent remaining versus time | 25 |
| 5.2.2.2 | Figure 11: Discharge rate versus time | 25 |
| 5.2.3 | Sample Calculations | 27 |
| 5.3 | Dispersion in the Air | 27 |

| | | Page |
|---|---|---|
| 5.3.1 | Introduction | 27 |
| 5.3.2 | Vapour Dispersion Nomograms and Tables | 27 |
| 5.3.2.1 | Figure 14: Vapour emission rate versus liquid spill radius for various temperatures | 29 |
| 5.3.2.2 | Figure 15: Vapour concentration versus downwind distance | 32 |
| 5.3.2.3 | Table 8: Maximum plume hazard half-widths | 34 |
| 5.3.2.4 | Figure 18: Plume travel time versus travel distance | 37 |
| 5.3.3 | Sample Calculation | 39 |
| 5.4 | Behaviour with Water | 42 |
| 5.4.1 | Introduction | 42 |
| 5.4.2 | Nomograms | 42 |
| 5.4.2.1 | Figure 21: Spill radius versus time (still water - unconfined) | 42 |
| 5.4.2.2 | Figure 22: Length of channel affected versus equivalent spill radius (still water - confined) | 44 |
| 5.4.2.3 | Figure 23: Translation distance versus time (no wind) | 44 |
| 5.4.2.4 | Figure 24: Vectoral addition of surface current and wind | 44 |
| 5.4.3 | Sample Calculations | 44 |
| 5.5 | Subsurface Behaviour: Penetration into Soil | 49 |
| 5.5.1 | Introduction | 49 |
| 5.5.2 | Equations Describing Toluene Movement into Soil | 50 |
| 5.5.3 | Saturated Hydraulic Conductivity of Toluene in Soil | 50 |
| 5.5.4 | Soils | 50 |
| 5.5.5 | Penetration Nomograms | 52 |
| 5.5.6 | Sample Calculation | 52 |
| 6 | ENVIRONMENTAL DATA | 58 |
| 6.1 | Suggested or Regulated Limits | 58 |
| 6.1.1 | Water | 58 |
| 6.1.2 | Air | 58 |
| 6.2 | Aquatic Toxicity | 58 |
| 6.2.1 | Canada | 58 |
| 6.2.2 | Other Countries | 58 |
| 6.2.2.1 | United States | 58 |
| 6.2.3 | Measured Toxicities | 58 |
| 6.2.3.1 | Freshwater toxicity | 60 |
| 6.2.3.2 | Saltwater toxicity | 61 |
| 6.2.4 | Aquatic Studies | 61 |
| 6.3 | Toxicity to Other Biota | 61 |
| 6.3.1 | Livestock | 62 |
| 6.3.2 | Avian | 62 |
| 6.3.3 | Insects and Vertebrates | 62 |
| 6.3.4 | Plants | 63 |
| 6.4 | Degradation | 63 |
| 6.4.1 | Biological Degradation | 63 |
| 6.4.2 | B.O.D. | 64 |
| 6.4.3 | C.O.D. | 64 |
| 6.5 | Long-term Fate and Effects | 64 |
| 6.6 | Soil | |

| | | Page |
|---|---|---|
| 6.6.1 | Soil Degradation of Material | 64 |
| 6.7 | Other Effects | 64 |
| 6.7.1 | Possible Effects on Water Treatment Processes | 64 |
| 7 | HUMAN HEALTH | 65 |
| 7.1 | Recommended Exposure Limits | 65 |
| 7.2 | Irritation Data | 67 |
| 7.2.1 | Skin Contact | 67 |
| 7.2.2 | Eye Contact | 67 |
| 7.3 | Threshold Perception Properties | 67 |
| 7.3.1 | Odour | 67 |
| 7.3.2 | Taste | 68 |
| 7.4 | Long-term Studies | 68 |
| 7.4.1 | Inhalation | 68 |
| 7.4.2 | Ingestion | 72 |
| 7.4.3 | Carcinogenicity | 74 |
| 7.4.4 | Teratogenicity and Mutagenicity | 74 |
| 7.5 | Symptoms of Exposure | 75 |
| 7.5.1 | Inhalation | 75 |
| 7.5.2 | Ingestion | 75 |
| 7.5.3 | Skin Contact | 75 |
| 7.5.4 | Eye Contact | 76 |
| 7.6 | Human Toxicity to Decay or Combustion Products | 76 |
| 7.6.1 | Carbon Monoxide | 76 |
| 8 | CHEMICAL COMPATIBILITY | 77 |
| 8.1 | Compatibility of Toluene with Other Chemicals and Chemical Groups | 77 |
| 9 | COUNTERMEASURES | 79 |
| 9.1 | Recommended Handling Procedures | 79 |
| 9.1.1 | Fire Concerns | 79 |
| 9.1.2 | Fire Extinguishing Agents | 79 |
| 9.1.3 | Spill Actions | 79 |
| 9.1.3.1 | General | 79 |
| 9.1.3.2 | Spills on land | 80 |
| 9.1.3.3 | Spills on water | 80 |
| 9.1.4 | Cleanup and Treatment | 80 |
| 9.1.4.1 | Spills on land | 80 |
| 9.1.4.2 | Spills on water | 80 |
| 9.1.4.3 | General | 80 |
| 9.1.5 | Disposal | 81 |
| 9.1.6 | Charcoal Filtration Data | 81 |
| 9.1.7 | Protective Measures | 82 |
| 9.1.8 | Special Precautions | 83 |
| 9.2 | Specialized Countermeasures Equipment, Materials or Systems | 84 |

| | | Page |
|---|---|---|
| 10 | PREVIOUS SPILL EXPERIENCE | 85 |
| 10.1 | Train Derailment | 85 |
| 11 | ANALYTICAL METHODS | 86 |
| 11.1 | Quantitative Method for the Detection of Toluene in Air | 86 |
| 11.1.1 | Gas Chromatography | 86 |
| 11.2 | Qualitative Method for the Detection of Toluene in Air | 87 |
| 11.3 | Quantitative Methods for the Detection of Toluene in Water | 88 |
| 11.3.1 | Gas Chromatography | 88 |
| 11.3.2 | Infrared Spectroscopy | 88 |
| 11.3.3 | Gravimetric | 88 |
| 11.4 | Qualitative Method for the Detection of Toluene in Water | 89 |
| 11.5 | Quantitative Methods for the Detection of Toluene in Soil | 89 |
| 11.5.1 | Gas Chromatography | 89 |
| 11.5.2 | Infrared Spectroscopy | 89 |
| 11.5.3 | Gravimetric | 90 |
| 11.6 | Qualitative Method for the Detection of Toluene in Soil | 90 |
| 12 | REFERENCES AND BIBLIOGRAPHY | 91 |
| 12.1 | References | 91 |
| 12.2 | Bibliography | 98 |

## LIST OF FIGURES


| Figure | | Page |
|---|---|---|
| 1 | VAPOUR PRESSURE vs TEMPERATURE | 7 |
| 2 | LIQUID DENSITY vs TEMPERATURE | 8 |
| 3 | SATURATED VAPOUR DENSITY vs TEMPERATURE | 8 |
| 4 | VAPOUR VISCOSITY vs TEMPERATURE | 9 |
| 5 | LIQUID VISCOSITY vs TEMPERATURE | 9 |
| 6 | PHASE DIAGRAM | 10 |
| 7 | RAILWAY TANK CAR - CLASS 111A60W1 | 16 |
| 8 | TYPICAL DRUM CONTAINERS | 19 |
| 9 | TANK CAR WITH PUNCTURE HOLE IN BOTTOM | 25 |
| 10 | PERCENT REMAINING vs TIME | 26 |
| 11 | DISCHARGE RATE vs TIME | 26 |
| 12 | SCHEMATIC OF CONTAMINANT PLUME | 28 |
| 13 | FLOW CHART TO DETERMINE VAPOUR HAZARD ZONE | 30 |
| 14 | VAPOUR EMISSION RATE vs LIQUID SPILL RADIUS FOR VARIOUS TEMPERATURES | 31 |
| 15 | NORMALIZED VAPOUR CONCENTRATION vs DOWNWIND DISTANCE | 33 |
| 16 | CONVERSION OF THRESHOLD LIMIT VALUE (TLV®) UNITS (ppm to $g/m^3$) | 35 |
| 17 | CONVERSION OF LOWER FLAMMABILITY LIMIT (LFL) UNITS (volume % to $g/m^3$) | 36 |
| 18 | PLUME TRAVEL TIME vs TRAVEL DISTANCE | 38 |
| 19 | HAZARD AREA FOR STEADY WINDS, EXAMPLE PROBLEM | 41 |
| 20 | HAZARD AREA FOR UNSTEADY WINDS, EXAMPLE PROBLEM | 41 |
| 21 | SPILL RADIUS vs TIME (still water - unconfined) | 43 |
| 22 | LENGTH OF CHANNEL AFFECTED vs EQUIVALENT SPILL RADIUS (still water - confined) | 45 |

| Figure | | Page |
|---|---|---|
| 23 | TRANSLATION DISTANCE vs TIME (no wind) | 46 |
| 24 | VECTORAL ADDITION OF SURFACE CURRENT AND WIND | 47 |
| 25 | SCHEMATIC SOIL TRANSPORT | 51 |
| 26 | FLOWCHART FOR NOMOGRAM USE | 53 |
| 27 | PENETRATION IN COARSE SAND | 54 |
| 28 | PENETRATION IN SILTY SAND | 55 |
| 29 | PENETRATION IN CLAY TILL | 56 |

## LIST OF TABLES


| Table | | Page |
|---|---|---|
| 1 | CONVERSION NOMOGRAMS | 6 |
| 2 | RAILWAY TANK CAR SPECIFICATIONS | 15 |
| 3 | TYPICAL RAILWAY TANK CAR SPECIFICATIONS - CLASS 111A60W1 | 17 |
| 4 | DRUMS | 20 |
| 5 | COMPATIBILITY WITH MATERIALS OF CONSTRUCTION | 22 |
| 6 | MATERIALS OF CONSTRUCTION | 23 |
| 7 | WEATHER CONDITIONS | 34 |
| 8 | MAXIMUM PLUME HAZARD HALF-WIDTHS (for toluene at 20°C) | 37 |

# 1 SUMMARY

## TOLUENE ($C_6H_5CH_3$)

Colourless, watery liquid with an aromatic odour

## SYNONYMS

Toluol, Methylbenzene, Phenylmethane

## IDENTIFICATION NUMBERS

UN. No. 1294; CAS No. 108-88-3; OHM-TADS No. 7216928; STCC No. 4909305

## GRADES & PURITIES

Nitration grade, 99.99 percent purity; Industrial grade, 98 percent purity

## IMMEDIATE CONCERNS

Fire: Flammable liquid. Vapour forms explosive mixtures with air. Flashback may occur along vapour trail

Human Health: Toxic via inhalation, ingestion, and skin contact

Environment: Toxic to aquatic life

## PHYSICAL PROPERTY DATA

State (15°C, 1 atm): liquid
Boiling Point: 110.6°C
Melting Point: -95°C
Flammability: flammable
Flash Point: 4°C (CC)
Density: 0.867 g/cm$^3$ (20°C)
Vapour Pressure: 3.7 kPa @ 25°C

Solubility (in water): 0.05 g/100 mL (20°C)
Behaviour (in water): floats
Behaviour (in air): vapour forms explosive mixtures with air
Odour Threshold: 0.17 ppm
Odour Threshold Range: 0.17 to 40 ppm

## ENVIRONMENTAL CONCERNS

Toluene is toxic to aquatic life. It may be hazardous to waterfowl and animals through ingestion or contact. Toluene has no food chain concentration potential. Harmful to some species at concentrations as low as 10 mg/L.

## HUMAN HEALTH

TLV®: 100 ppm (375 mg/m$^3$)
IDLH: 2,000 ppm (7,648 mg/m$^3$)

Exposure Effects

Inhalation: Inhalation of vapour causes headache, slight drowsiness at 500 ppm, nausea, and difficult breathing. Breathing high concentrations of toluene may cause death by paralysis of the respiratory centre

Contact: Toluene is absorbed to produce symptoms similar to those mentioned above. Prolonged skin exposure causes irritation. Eye contact yields irritation from liquid or high vapour concentrations, and can produce corneal burns

## IMMEDIATE ACTION

### Spill Control

Restrict access to spill site. Issue warning: "FLAMMABLE". Call fire department and notify manufacturer. Eliminate sources of ignition including traffic and equipment. Stop the flow and contain spill, if safe to do so. Avoid contact with liquid and vapour; stay upwind of release. Keep contaminated water from entering sewers or watercourses.

### Fire Control

Use foam, dry chemical or carbon dioxide to extinguish. Cool fire-exposed containers with water. Stay clear of tank ends.

## COUNTERMEASURES

### Emergency Control Procedures in/on

Soil: Construct barriers to contain spill or divert to impermeable surfaces. Remove material with pumps or vacuum equipment. Adsorb residual liquid on natural or synthetic sorbents, shovel into metal containers with covers. All equipment should be spark- or explosion-proof

Water: Contain with booms, weirs or natural barriers. Use (oil) skimming equipment or suction hoses to remove slick, followed by the application of sorbents. All equipment should be spark- or explosion-proof

Air: Use water spray to disperse flammable vapour. Control runoff for later treatment and/or disposal

## NAS HAZARD RATING

| Category | Rating |
|---|---|
| Fire | 3 |
| Health | |
| Vapour Irritant | 1 |
| Liquid or Solid Irritant | 1 |
| Poison | 2 |
| Water Pollution | |
| Human Toxicity | 1 |
| Aquatic Toxicity | 3 |
| Aesthetic Effect | 2 |
| Reactivity | |
| Other Chemicals | 1 |
| Water | 0 |
| Self-reaction | 0 |

NFPA HAZARD CLASSIFICATION

## 2 PHYSICAL AND CHEMICAL DATA

### Physical State Properties

| | |
|---|---|
| Appearance | Colourless liquid (Dow ERIS 1979) |
| Usual shipping state | Liquid |
| Physical state at 15°C, 1 atm | Liquid |
| Melting point | -95°C (CRC 1980; Kirk-Othmer 1983) |
| Freezing point | -95°C (Dow ERIS 1979; Kirk-Othmer 1983) |
| Boiling point | 110.6°C (CRC 1980) |
| Vapour pressure | 3.7 kPa (25°C) (Dow MSDS 1979)<br>7.9 kPa (40°C) (Kirk-Othmer 1983) |

### Densities

| | |
|---|---|
| Density | 0.867 g/cm$^3$ (20°C) (Kirk-Othmer 1983) |
| Specific gravity | 0.872 (20°/4°C) (Dow MSDS 1979) |
| Vapour density | 3.14 (Dow MSDS 1979) |

### Fire Properties

| | |
|---|---|
| Flammability | Flammable liquid (NFPA 1978) |
| Flash point, CC | 4°C (NFPA 1978) |
| OC | 13°C (CHRIS 1978) |
| Autoignition temperature | 480°C (NFPA 1978)<br>480-496°C (API 1982) |
| Burning rate | 5.7 mm/min (CHRIS 1978) |
| Upper flammability limit | 7.1 percent (v/v) (NFPA 1978) |
| Lower flammability limit | 1.4 percent (v/v) (NFPA 1978) |
| Flame speed | 37 cm/s (Lange's Handbook 1979) |
| Heat of combustion | 3,909 kJ/mole (20°C) (CRC 1980) |
| Combustion products | Carbon dioxide and water (CRC 1980) |
| Flashback potential | Vapour may travel considerable distance to a source of ignition and flash back (NFPA 1978) |
| Explosiveness | Vapours form explosive mixtures with air (NFPA 1978) |
| Behaviour in a fire | May explode if ignited in enclosed areas (NFPA 1978) |
| Electrical ignition hazard | May be ignited by electrical discharge |

**Other Properties**

| | |
|---|---|
| Molecular weight of pure substance | 92.15 (CRC 1980) |
| Constituent components of typical commercial grade | Industrial grade: 98 percent toluene (Dow ERIS 1979)<br>Nitration grade: 99.99 percent toluene (Kirk-Othmer 1983) |
| Refractive index | 1.4961 (20°C) (CRC 1980) |
| Viscosity | 0.590 mPa·s (20°C) (CRC 1980) |
| Liquid interfacial tension with air | 28.5 mN/m (20°C) (CRC 1980)<br>27.9 mN/m (25°C) (Kirk-Othmer 1983) |
| Liquid interfacial tension with water | 36.1 mN/m (25°C) (CHRIS 1978) |
| Latent heat of fusion | 6.6 kJ/mole (at melting point) (CRC 1980) |
| Latent heat of sublimation | 38.0 kJ/mole (25°C) (Lange's Handbook 1979)<br>33.18 kJ/mole (110.6°C) (Kirk-Othmer 1983) |
| Latent heat of vaporization | 35.9 kJ/mole (at boiling point) (CRC 1980) |
| Heat of formation | 12.1 kJ/mole (liquid at 25°C) (Sussex 1977; Kirk-Othmer 1983)<br>50.0 kJ/mole (gas at 25°C) (Kirk-Othmer 1983) |
| Entropy | 219.6 kJ/K (liquid) (Kirk-Othmer 1983)<br>319.7 kJ/K (gas) (Kirk-Othmer 1983) |
| Ionization potential | 8.82 eV (Rosenstock 1977) |
| Heat capacity | |
| constant pressure ($C_p$) | 1.125 J/(g·K) (ideal gas) (Kirk-Othmer 1983)<br>156 J/(mole·°C) (25°C) (CRC 1980) |
| constant volume ($C_v$) | 1.970 J/(g·K) (liquid at STP) (Kirk-Othmer 1983)<br>143 J/(mole·°C) (25°C) (CRC 1980) |
| Critical pressure | 4,215 kPa (CRC 1980)<br>4,109 kPa (Kirk-Othmer 1983) |
| Critical temperature | 320.8 °C (CRC 1980)<br>318.6°C (Kirk-Othmer 1983) |
| Coefficient of thermal expansion | $1.099 \times 10^{-3}$/°C (20°C) (Lange's Handbook 1979) |
| Thermal conductivity | 4.91 J/(h·cm·°C) (17°C) (CRC 1980) |
| Saturation concentration | 110 g/m$^3$ (20°C) (Verschueren 1977)<br>184 g/m$^3$ (30°C) (Verschueren 1977) |
| Diffusivity | 0.076 cm$^2$/s (0°C) (Perry 1973) |
| $Log_{10}$ octanol/water partition coefficient | 2.69 (20°C) (Chiou and Schmedding 1982) |

**Solubility**

| | |
|---|---|
| In water | 0.05 g/100 mL (20°C) (Texaco MSDS)<br>0.047 g/100 mL (16°C) (Verschueren 1977)<br>0.0528 g/100 mL (20°C) (Verschueren 1977) |
| In other common materials | Miscible in ethanol, diethyl ether and benzene. Soluble in acetone and carbon disulphide (CRC 1980) |
| Azeotropes | With water, 45 percent (w/w) toluene, BP = 95.3°C (Kirk-Othmer 1983)<br>With methanol, 31 percent (w/w) toluene, BP = 63.8°C (Kirk-Othmer 1983)<br>With ethanol, 32 percent (w/w) toluene, BP = 76.7°C (Kirk-Othmer 1983) |
| **Vapour Weight to Volume Conversion Factor** | 1 ppm = 3.824 $mg/m^3$ (20°C) (Verschueren 1977) |

TABLE 1

TOLUENE

# CONVERSION NOMOGRAMS




**Pressure** 1 kPa = 1,000 Pa










**Viscosity**

**Dynamic** 1 Pa·s = 1,000 centipoise (cP)

**Kinematic** 1 $m^2/s$ = 1,000,000 centistokes (cSt)

**Concentration (in water)**

1 ppm ≅ 1 mg/L

**Energy (heat)** 1 kJ = 1,000 J









FIGURE 1

TOLUENE

## VAPOUR PRESSURE vs TEMPERATURE

Reference: Chem. Eng. 1975

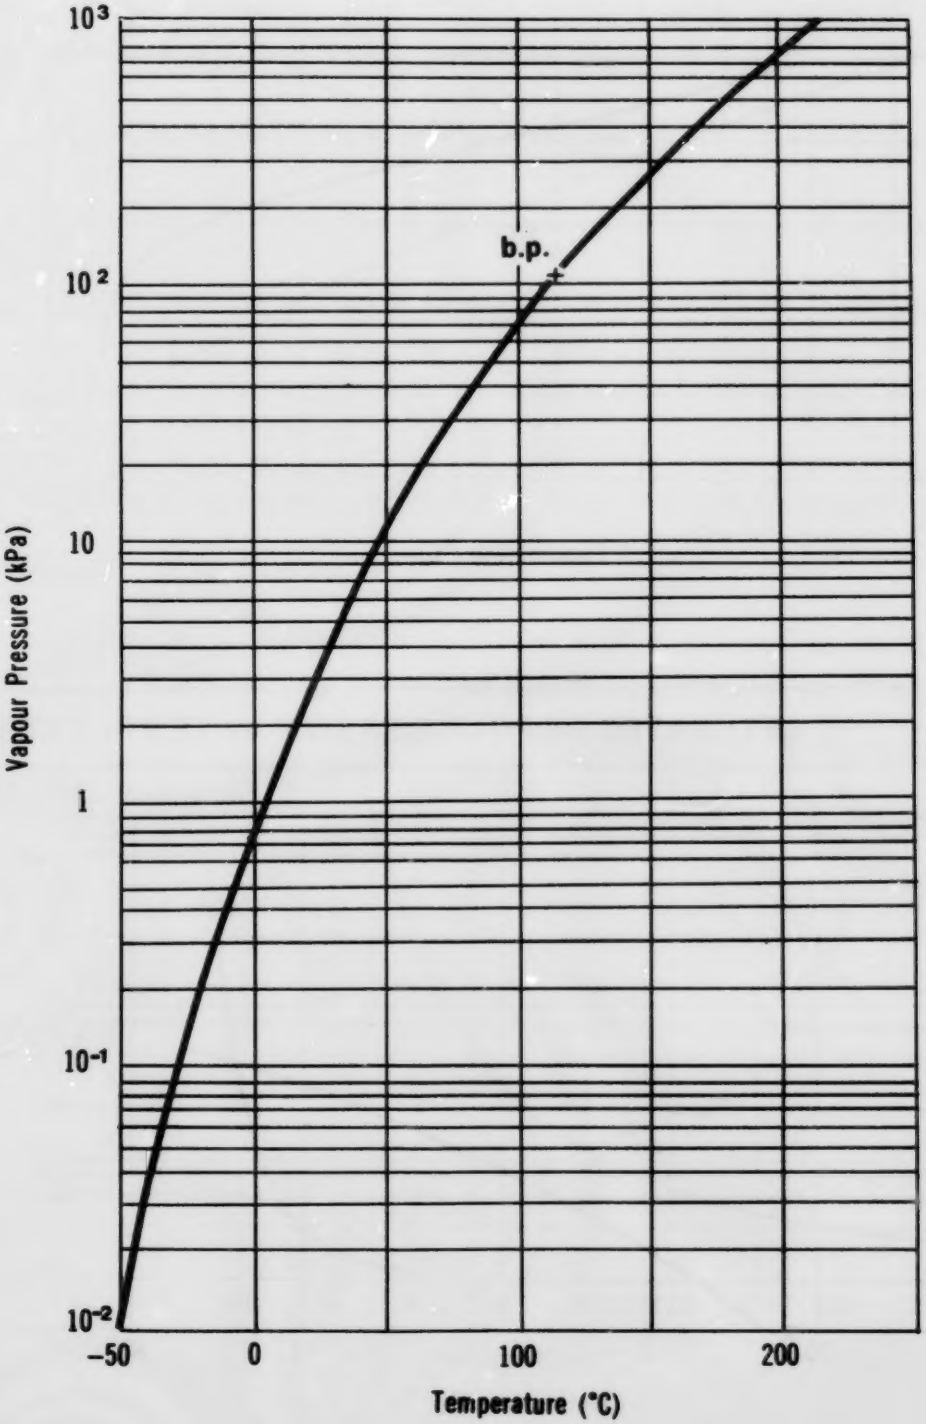

FIGURE 2

TOLUENE

## LIQUID DENSITY vs TEMPERATURE

Reference: Chem. Eng. 1975

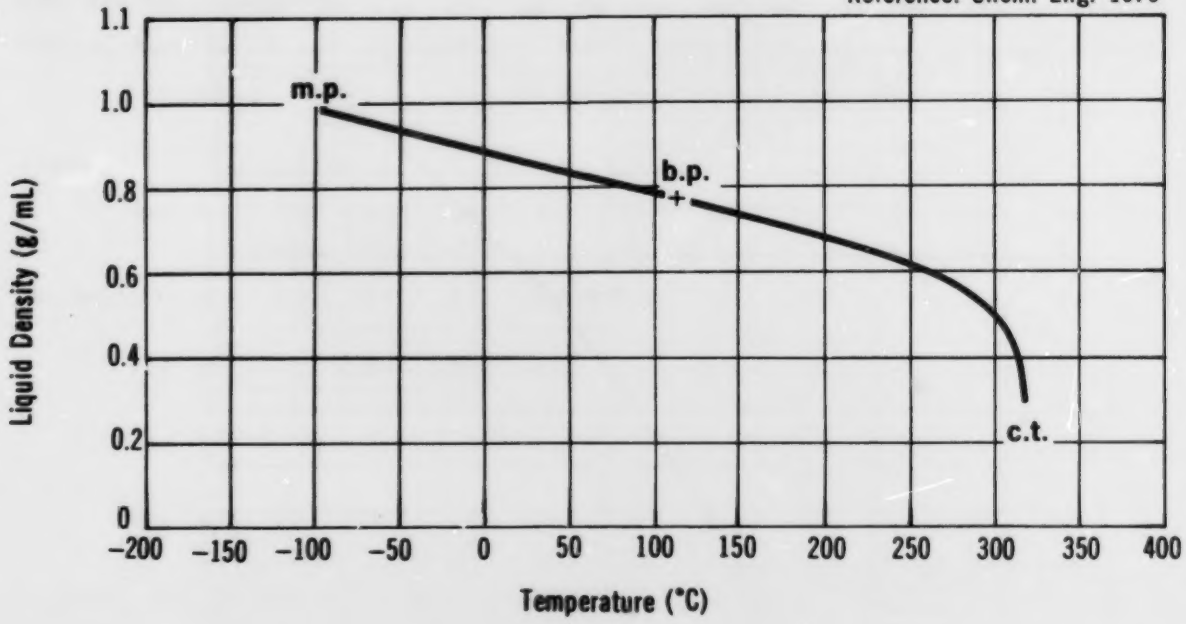


FIGURE 3

TOLUENE

## SATURATED VAPOUR DENSITY vs TEMPERATURE

Reference: CHRIS 1978

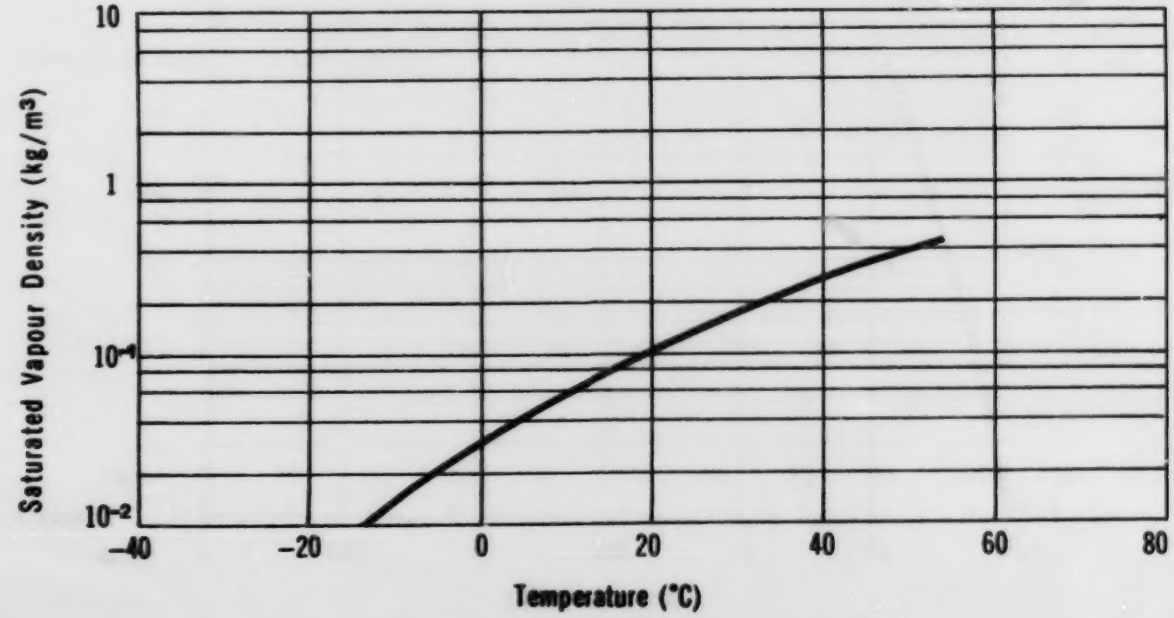

FIGURE 4

TOLUENE

## VAPOUR VISCOSITY vs TEMPERATURE

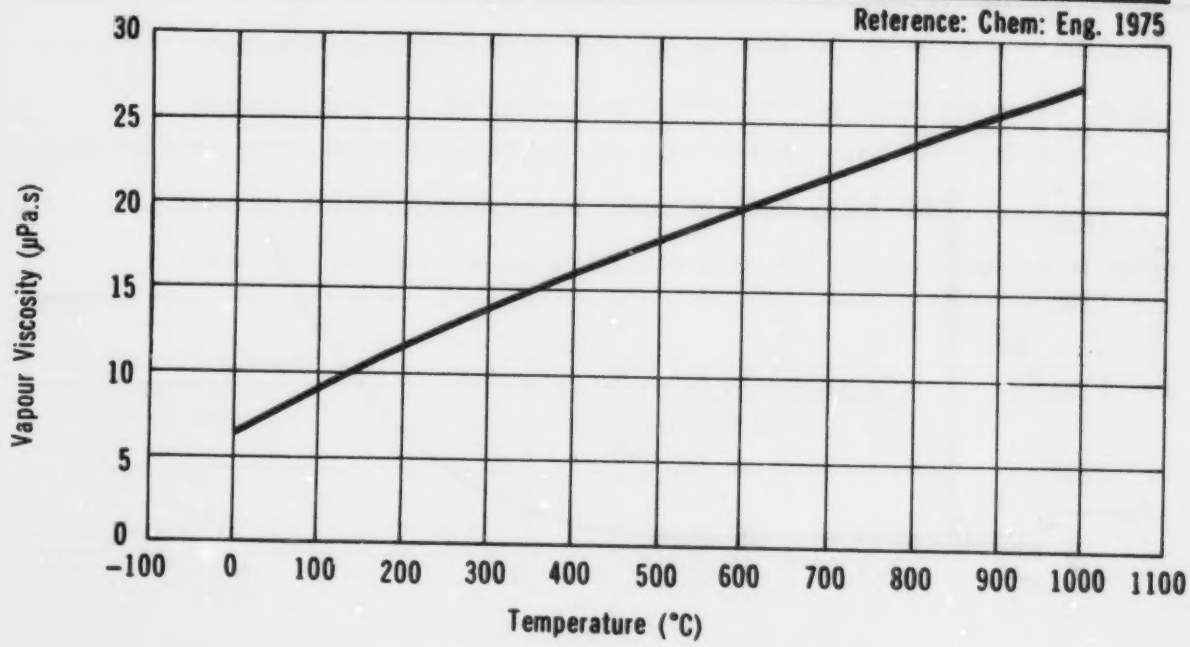


FIGURE 5

TOLUENE

## LIQUID VISCOSITY vs TEMPERATURE

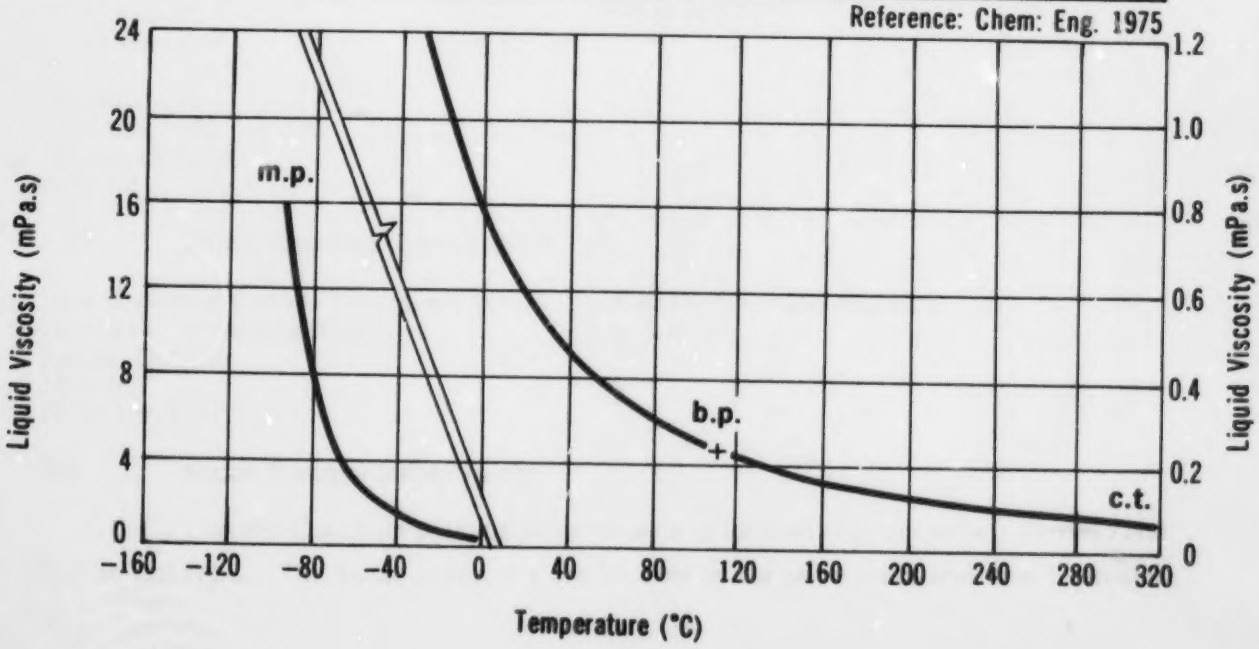

FIGURE 6

TOLUENE

## PHASE DIAGRAM

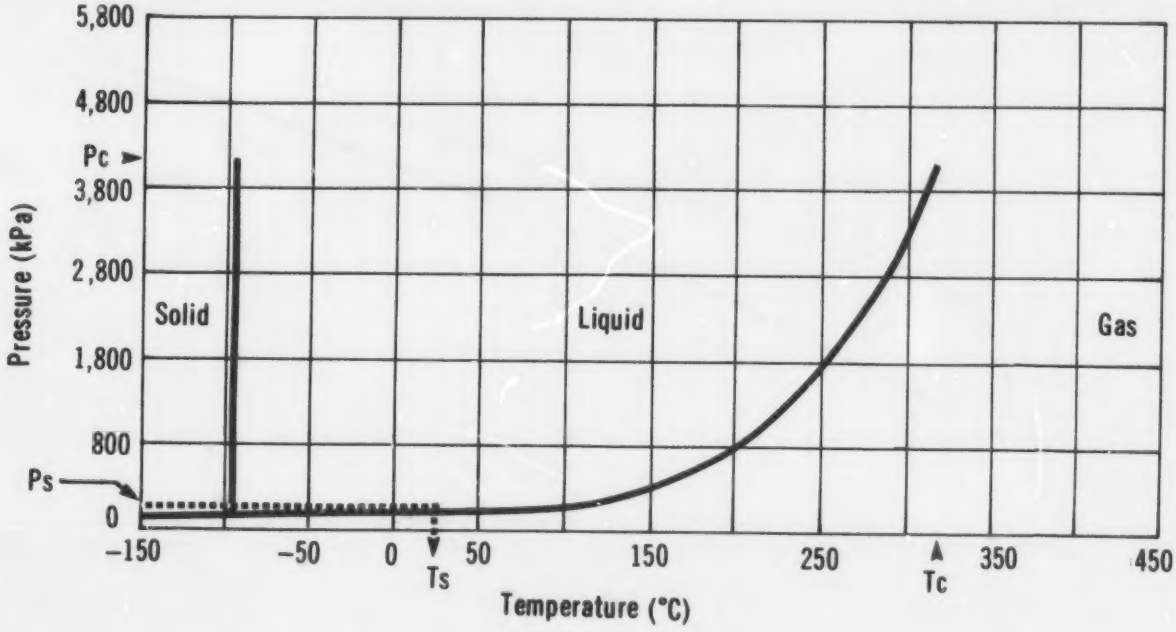

# 3 COMMERCE AND PRODUCTION

## 3.1 Grades, Purities (Finachem PI 1979; Corpus 1983)

Toluene is sold in a nitration grade with a purity of 99.99 percent, or as an industrial grade with a purity of 98 percent. It is also sold as a mixture with xylenes.

## 3.2 Domestic Manufacturers (Corpus 1983; CBG 1980; CCPA 1981)

These are corporate headquarters addresses and are not intended as spill response contacts.

Esso Chemical Canada
2300 Yonge Street
Toronto, Ontario
M5W 1K3
(416) 488-6600

Gulf Canada Ltd.
800 Bay Street
Toronto, Ontario
M5S 1Y8
(416) 924-4141

Petro-Canada
1 Place Ville Marie
Montreal, Quebec
H3B 4A9
(514) 866-3911
(514) 866-2094

Petrosar Ltd.
P.O. Box 3060
Sarnia, Ontario
N7T 7M1

Shell Canada Ltd.
505 University Avenue
Toronto, Ontario
M5G 1X4
(416) 866-7111

Sunchem, Division of Sunoco Inc.
56 Wellesley Street West
Toronto, Ontario
M5S 2S4
(416) 924-4111

Texaco Canada Inc.
90 Wynford Drive
Don Mills, Ontario
M3C 1K4
(416) 443-7811

## 3.3 Other Suppliers (Corpus 1983)

Dow Chemical Canada Inc. (Captive)
Box 1012, Modeland Road
Sarnia, Ontario
N7T 7K7
(519) 339-3131

Kalama Chemical (Direct)
U.S.A.

## 3.4 Major Transportation Routes

Current Canadian production of toluene is located only in Quebec, Ontario and British Columbia. The major customers are located in the same areas and thus the major

transportation routes are in the Toronto-Sarnia area, the Montreal area, and some in the Vancouver area. Minor amounts are transported across Canada generally.

**3.5 Production Levels** (Corpus 1983)

| Company, Plant Location | | Nameplate Capacity kilotonnes/yr (1982) |
|---|---|---|
| Esso Chemical Canada, Sarnia, Ont. | | 70 |
| Esso Chemical Canada, Ioco, B.C. | | 38 |
| Gulf Canada, Montreal, Que. | | 52 |
| Petro-Canada, Montreal, Que. | | 158 |
| Petrosar, Corunna, Ont. | | 60 |
| Shell Canada, Corunna, Ont. | | 95 |
| Sunchem, Sarnia, Ont. | | 160 |
| Texaco Canada, Mississauga, Ont. | | 20 |
| | TOTAL | 653 |
| Domestic Production (1982) | | 470 |
| Imports (1982) | | 1.1 |
| | TOTAL SUPPLY | 471.1 |

**3.6 Manufacture of Toluene**

**3.6.1 General.** Toluene is primarily produced in Canada by catalytic reformation of naphthene-rich petroleum feedstock fractions, generally in conjunction with the manufacture of benzene and xylenes.

**3.6.2 Manufacturing Process** (Kirk-Othmer 1983; FKC 1975). Dehydrogenation of naphtha feedstock is the most common process used to produce toluene. The feedstock is preheated, vaporized, mixed with hydrogen-rich recycled gas, and passed through the reactor for a contact time of about 15 seconds. Cycloalkanes in the feedstock are catalytically reformed into aromatic hydrocarbons and hydrogen; a representative reaction is:

$$C_6H_{11}CH_3 \xrightarrow[455\text{-}549^\circ C,\ 1{,}000 \text{ to } 300 \text{ kPa}]{\text{Molybdenum or Platinum on Alumina}} C_6H_5CH_3 + 3H_2$$

Conversion is usually around 80 percent. The process stream is cooled in heat exchangers and the liquid phase separated; the liquid is fractionated and the toluene-rich fraction is refined by further fractionation, and azeotropic distillation and washing sequences. The gas phase and toluene-poor phases are recycled to the process.

### 3.7 Major Uses in Canada (Corpus 1983; Finachem PDS 1981)

Toluene is used in the production of benzene, benzoic acid/phenol, trinitrotoluene, lacquers, resin solutions, lacquer thinners, as a gasoline component, and as a solvent in formulations of rubber cements, paints, inks and pesticides. In 1982, 39 percent was used for solvents, 25 percent for benzene production and 22 percent for benzoic acid/phenol production. This is expected to change by 1987 to be 68 percent for benzene production, 25 percent as solvents and an insignificant amount for benzoic acid/phenol production.

### 3.8 Major Buyers in Canada (Corpus 1983; CBG 1980)

A & K Petro-Chem Industries, Weston, Ont.
Almatex, London, Ont.
Anachemia Chemicals, Montreal, Que.
Apco Chemical, Toronto, Ont.
Ashland Chemical/Solvents, Division of Valvoline Oil & Chemicals, Mississauga, Ont.
Arliss Chemical, Montreal, Que.
Bate Chemical, Toronto, Ont.
Borden Chemical, Toronto, Ont.
C-I-L Paints, Toronto, Ont.
C-I-L, McMasterville, Que.
Canada Colors & Chemical, Toronto, Ont.
Canada Printing Inks, Toronto, Ont.
Color Your World, Toronto, Ont.
Cote Chemicals, Chateauguay, Que.
DeSoto Coatings, Toronto, Ont.
Dominion Cisco Industries, Toronto, Ont.
Du Pont Canada, Ajax, Corunna, Ont.
Ernchem Sales, Vancouver, B.C.
Ford Motor Canada, Oakville, Ont.
General Motors Canada, Oshawa, Ont.
Gulf Canada, Montreal, Que.
Harrisons & Crosfield, Toronto, Ont.
Hart Chemical, Guelph, Ont.
Industrial Adhesives, Toronto, Ont.; Montreal, Que.
Inmont Canada, Toronto, Brantford, Ont.
International Chemical, Brampton, Ont.
International Paints, Montreal, Que.
Lawter Chemicals Canada, Toronto, Ont.
3M, London, Ont.
Mallinckrodt, Pt. Claire, Que.
Mobil Chemical, Toronto, Ont.

PPG Industries Canada, Toronto, Ont.
Shefford Chemicals, Granby, Que.
Sherwin-Williams of Canada, Montreal, Que.
Sico, Quebec City, Montreal, Que.
Sinclair & Valentine, Toronto, Ont.
Stanchem (PPG Industries), Montreal, Que.
Syndel Labs, Vancouver, B.C.
Tonecraft, Toronto, Ont.
Toronto Star, Toronto, Ont.
USM Canada, Montreal, Que.
Van Waters & Rogers, Richmond, B.C.; Montreal, Que.
Wilchem, Willowdale, Ont.

# 4 MATERIAL HANDLING AND COMPATIBILITY

## 4.1 Containers and Transportation Vessels

**4.1.1 Bulk Shipment.** Transportation vessels and containers under this category have been grouped under the classifications of railway tank cars, highway tank vehicles, and portable tanks. Some toluene is transported in Canada by pipeline and occasionally by sea using tank containers.

**4.1.1.1 Railway tank cars.** Railway tank cars used to transport toluene are classified under the A-8 Class CTC/DOT 111A tank specification. Each specification is described in Table 2 (TCM 1979).

TABLE 2 RAILWAY TANK CAR SPECIFICATIONS

| CTC/DOT* Specification Number | Description |
|---|---|
| 111A60W1 | Steel fusion-welded tank without dome.<br>Uninsulated or insulated.<br>2% minimum outage. Gauging device.<br>Test pressure 414 kPa (60 psi). |
| 111A60F1 | Steel forge-welded tank without dome.<br>Uninsulated or insulated.<br>2% minimum outage. Gauging device.<br>Test pressure 414 kPa (60 psi). |
| 111A100W1 | Steel fusion-welded tank without dome.<br>Uninsulated or insulated.<br>2% minimum outage. Gauging device.<br>Bottom outlet or washout optional.<br>Test pressure 690 kPa (100 psi). |

* Canadian Transport Commission and Department of Transportation (U.S.)

Toluene is usually shipped in railway tank cars with capacities of 75,700 L (16,700 Imp. gal.), 78,000 L (17,200 Imp. gal.), 90,900 L (20,000 Imp. gal.), and 98,400 L (21,650 Imp. gal.). Figure 7 shows a typical class 111A60W1 railway tank car used to transport toluene; Table 3 indicates railway tank car details associated with this drawing. Cars are equipped for unloading by pump or gravity through 102 mm (4 in.) or 152 mm (6 in.) diameter bottom outlets provided with inner plug valves (TDGC 1980). In addition to bottom unloading, the cars may be unloaded from the top by pump. In this case, the

FIGURE 7

TOLUENE

**RAILWAY TANK CAR - CLASS 111A60W1**

(Reference - TCM 1979, RTDCR 1974)

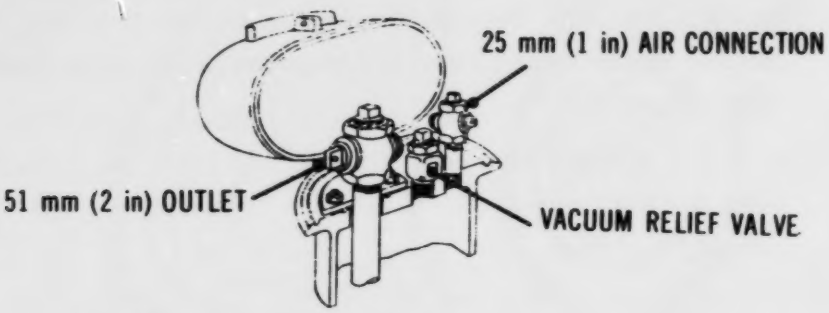


**Detail of top unloading arrangement**

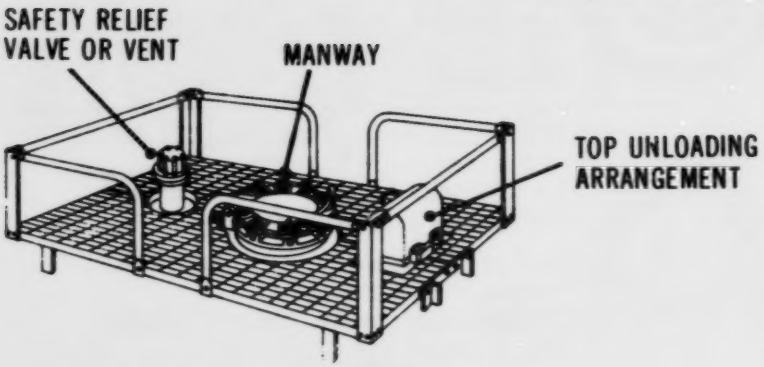


**Detail of loading platform**

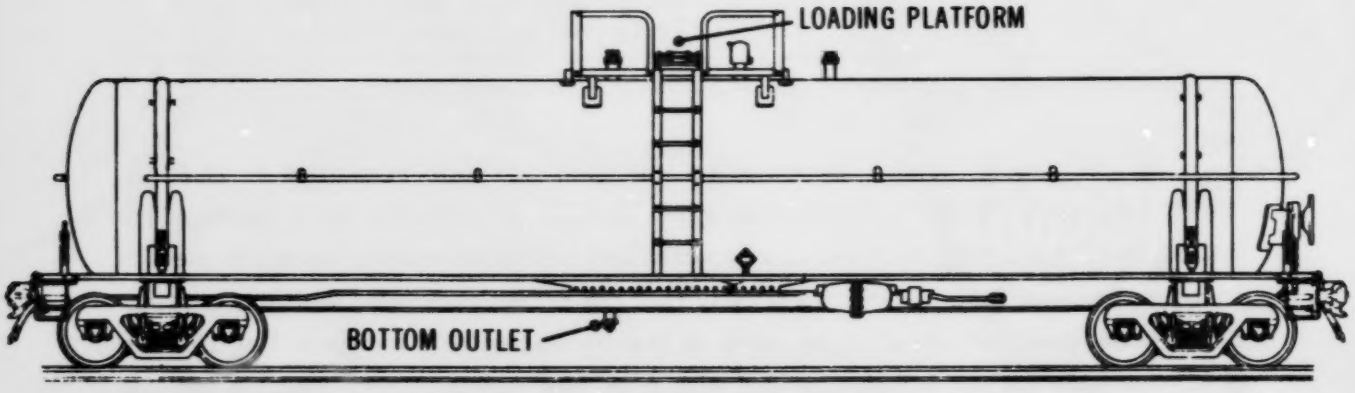


**Illustration of tank car layout**

TABLE 3 TYPICAL RAILWAY TANK CAR SPECIFICATIONS - CLASS 111A60W1 (TCM 1979; RTDCR 1974)

| Description | Tank Car Size (Imp. Gal.) | | |
|---|---|---|---|
| | 16,700 | 17,200 | 20,000 |
| **Overall** | | | |
| Nominal capacity | 75,700 L (16,700 gal.) | 78,000 L (17,200 gal.) | 90,900 L (20,000 gal.) |
| Car weight - empty | 33,900 kg (74,700 lb.) | 33,900 kg (74,700 lb.) | 38,900 kg (85,800 lb.) |
| Car weight - (max.) | 119,000 kg (263,000 lb.) | 83,500 kg (184,000 lb.) | 119,000 kg (263,000 lb.) |
| **Tank** | | | |
| Material | Steel | Steel | Steel |
| Thickness | 11.1 mm (7/16 in.) | 11.1 mm (7/16 in.) | 11.1 mm (7/16 in.) |
| Inside diameter | 2.60 m (102 in.) | 2.62 m (103 in.) | 2.74 m (108 in.) |
| Test pressure | 414 kPa (60 psi) | 414 kPa (60 psi) | 414 kPa (60 psi) |
| Burst pressure | 1,640 kPa (240 psi) | 1,640 kPa (240 psi) | 1,640 kPa (240 psi) |
| **Approximate Dimensions** | | | |
| Coupled length | 17 m (57 ft.) | 17 m (57 ft.) | 18 m (60 ft.) |
| Length over strikers | 16 m (53 ft.) | 16 m (53 ft.) | 17 m (57 ft.) |
| Length of truck centers | 13 m (42 ft.) | 13 m (42 ft.) | 14 m (45 ft.) |
| Height of top of grating | 4 m (12 ft.) | 4 m (12 ft.) | 4 m (13 ft.) |
| Overall height | 5 m (15 ft.) | 5 m (15 ft.) | 5 m (15 ft.) |
| Overall width (over grabs) | 3.2 m (127 in.) | 3.2 m (127 in.) | 3.2 m (127 in.) |
| Length of grating | 2-3 m (8-10 ft.) | 2-3 m (8-10 ft.) | 2-3 m (8-10 ft.) |
| Width of grating | 1.5-2 m (5-6 ft.) | 1.5-2 m (5-6 ft.) | 1.5-2 m (5-6 ft.) |
| **Loading/Unloading Fixtures** | | | |
| **Top Unloading** | | | |
| Unloading connection | 51 mm (2 in.) | 51 mm (2 in.) | 51 mm (2 in.) |
| Manway/fill hole | 203-356 mm (8-14 in.) | 203-356 mm (8-14 in.) | 203-356 mm (8-14 in.) |
| Air connection | 25-51 mm (1-2 in.) | 25-51 mm (1-2 in.) | 25-51 mm (1-2 in.) |
| **Bottom Unloading** | | | |
| Bottom outlet | 102-152 mm (4-6 in.) | 102-152 mm (4-6 in.) | 102-152 mm (4-6 in.) |
| **Safety Devices** | Safety vent or valve | Safety vent or valve | Safety vent or valve |
| **Dome** | None | None | None |
| **Insulation** | Optional | Optional | Optional |

toluene is withdrawn through an eduction pipe which extends from the bottom of the tank to the top operating platform where it terminates with an unloading connection valve. Air pressure is never used for unloading toluene tanks (MCA 1956).

A safety relief valve set at 241 kPa (35 psi) and a safety vent set at 414 kPa (60 psi) are required on top of the rail car (TCM 1979). A gauging device, either the rod type or the tape type, is optional. The top unloading connection must be protected by a housing. The maximum pressure allowable for the CTC/DOT 111A100W1 rail cars is 448 kPa (65 psi). When the 111A60W1 or 111A60F1 cars are used, this maximum pressure would be 276 kPa (40 psi) (TCM 1979). Toluene is never transported under pressure.

4.1.1.2 **Tank motor vehicles.** Toluene is transported by tank motor vehicles with tanks classed as non-pressure vessels (TDGC 1980). Design pressure for such tanks does not exceed 14 kPa (2 psi). Highway tanks carrying toluene are similar to the previously described railway tanks.

The off-loading equipment and procedures for tank motor vehicles are similar to those for railway tank cars, to be discussed later. Tanks are usually unloaded from the top by pump.

4.1.2 **Packaging.** Toluene, in addition to railway and highway bulk shipments, is also transported in drums (Figure 8). Drums fabricated from a variety of construction materials (Table 4) are permitted (TDGC 1980).

4.2 **Off-loading**

4.2.1 **Off-loading Equipment and Procedures for Railway Tank Cars.** Prior to off-loading, certain precautions must be taken (MCA 1956):

- The vented storage tank must be checked to make sure that it will hold the contents of the car.
- For night-time unloading, lights must have an explosion-proof rating.
- Personnel must not enter the car under any circumstances.
- Brakes must be set, wheels chocked, derails placed and caution signs displayed.
- A safe operating platform must be provided at the unloading point.
- Tools used during unloading must be spark-resistant.
- Tank car must be effectively grounded.

Two means of off-loading are used for toluene rail cars, top off-loading and bottom off-loading.

FIGURE 8

TOLUENE

# TYPICAL DRUM CONTAINERS

## Typical monel drum

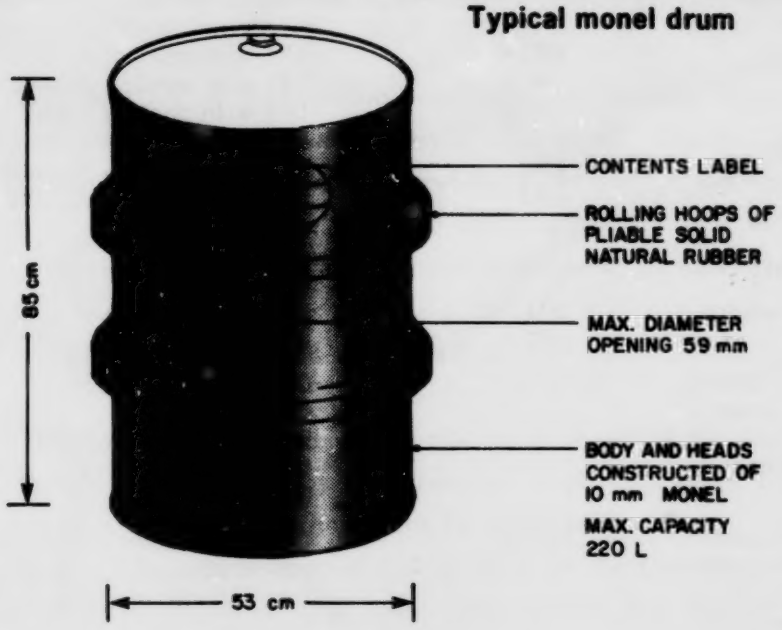
85 cm
53 cm
CONTENTS LABEL
ROLLING HOOPS OF PLIABLE SOLID NATURAL RUBBER
MAX. DIAMETER OPENING 59 mm
BODY AND HEADS CONSTRUCTED OF 10 mm MONEL
MAX. CAPACITY 220 L

## Typical steel drum

## Typical aluminum drum

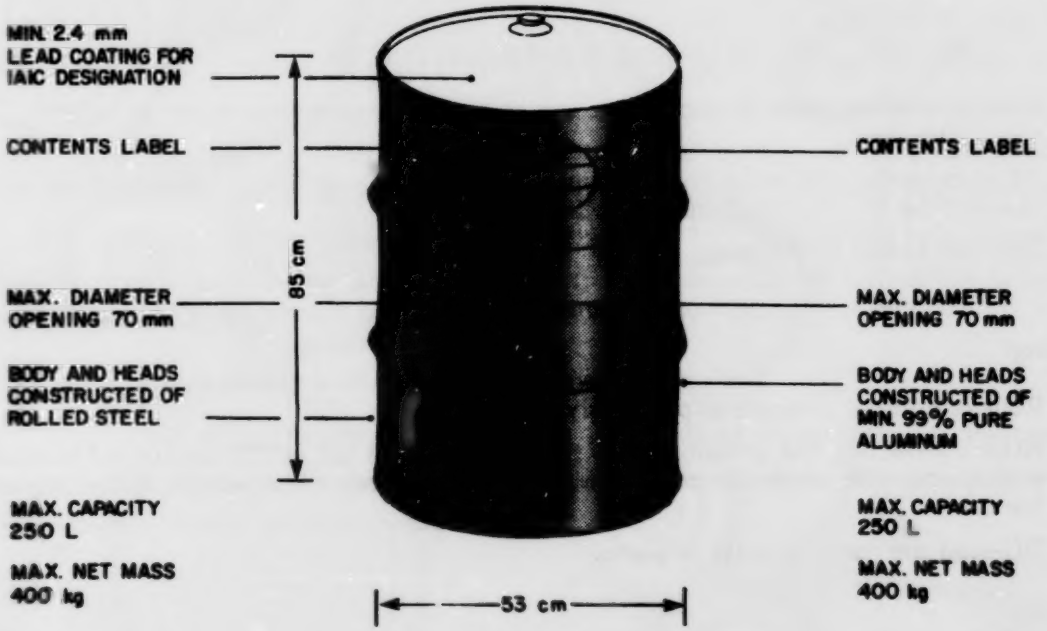
MIN. 2.4 mm LEAD COATING FOR IAIC DESIGNATION
CONTENTS LABEL
85 cm
MAX. DIAMETER OPENING 70 mm
BODY AND HEADS CONSTRUCTED OF ROLLED STEEL
MAX. CAPACITY 250 L
MAX. NET MASS 400 kg
53 cm
CONTENTS LABEL
MAX. DIAMETER OPENING 70 mm
BODY AND HEADS CONSTRUCTED OF MIN. 99% PURE ALUMINUM
MAX. CAPACITY 250 L
MAX. NET MASS 400 kg

TABLE 4 DRUMS

| Type of Drum | Designation | Description | Figure No. (if any) |
|---|---|---|---|
| Steel | 1A1 | Nonremovable head, reusable | 8 |
| | 1A1A | 1A1 with reinforced chime | 8 |
| | 1A1B | 1A1 with welded closure flange | 8 |
| | 1A1D | 1A1 with coating (other than lead) | 8 |
| | 1A2 | Removable head, reusable | 8 |
| | 1A3 | Nonremovable head, single use only | 8 |
| Monel* | TC5M | | |
| Aluminum | 1B1 | Nonremovable head | 8 |
| | 1B2 | Removable head | 8 |
| Steel Drums with inner plastic receptacles | 6HA1 | Outer steel sheet in shape of drum. Inner plastic receptacle. Maximum capacity of 225 L (49 gal.) | |
| Fibreboard Drums with inner plastic receptacles | 6HG1 | Outer container of convolutely wound plies of fibreboard. Inner plastic in shape of drum. Maximum capacity of 225 L (49 gal.) | |

* See Section 4.3 of this report.

Proceed with top off-loading as follows (MCA 1956):

- Relieve tank of internal vapour pressure by cooling tank with water or venting at short intervals.
- After removing the protective housing from the discharge line at the top of the car, connect the 51 mm (2 in.) unloading line.
- Off-load tanker by pumping.

Proceed with bottom off-loading in the following manner using gravity flow or pumping:

- Relieve internal pressure as previously mentioned.
- After connecting the unloading line to the 152 mm (6 in.) or 102 mm (4 in.) bottom outlet, open the inside bottom valve by turning the valve rod handle at the top of the car.
- Off-load the car by gravity or pump.

**4.2.2 Specifications and Materials for Off-loading Equipment.** The materials of construction for off-loading system components discussed in this section along with specifications refer to those generally used in toluene service. The components of a typical off-loading system that will be discussed include pipes and fittings, flexible connections, valves, gaskets and pumps.

Schedule 40 seamless ASTM A106 carbon steel pipes and fittings lined with polypropylene resin are recommended for toluene lines (DCRG 1978). Flanged joints should be used and these should be welded, because threaded pipes and fittings tend to leak after a very short time. Stress relief at the weld will also lengthen the serviceability of the pipe. The pipeline should be tested with air at pressures from 345 to 518 kPa (50 to 75 psi) and all leaks carefully stopped. If leaks develop in service, the only satisfactory way to repair them is to chip out the bad weld and reweld, or to replace the section of pipe.

The unloading line should be 51 mm (2 in.) pipe because this is the standard fitting on toluene tank cars. Process pipe may be almost any size; pipe under 25 mm (1 in.), however, is not recommended. Outdoor lines must be self-draining.

Flexible bellows-type expansion joints should be used for the flexible sections of the unloading line. They are manufactured with ASA ductile iron flanges with expansion members molded from tetrafluoroethylene resin (Dow PPS 1972). Some installations of flexible line are made with standard lined fittings using a number of flanged elbows. For valving, cast iron or cast steel diaphragm valves lined with chlorinated polyether or polyvinylidene chloride resin will serve adequately. Only Viton should be used as a gasket material at normal temperature ranges (Dow PPS 1972).

A single-suction, sealless magnetic drive centrifugal pump with "wet end" material of 316 stainless steel gives good results; an all iron pump is equally good (HIS 1969). There is virtually no leakage from this type of pump. Provision must be made for draining the pump so that repairs can be made safely. The pump should be equipped with flanges at both suction and discharge openings; screw connections are subject to leakage and should be avoided.

## 4.3 Compatibility with Materials of Construction

The compatibility of toluene with materials of construction is indicated in Table 5. The unbracketed abbreviations are described in Table 6. The rating system for this report is briefly described below:

**Recommended:** This material will perform satisfactorily in the given application.

**Conditional:** Material will show deterioration in the given application; however, it may be suitable for intermittent or short-term service.

**Not Recommended:** Material will be severely affected in this application and should not be used.

TABLE 5 COMPATIBILITY WITH MATERIALS OF CONSTRUCTION

| | Chemical | | Material of Construction | | |
|---|---|---|---|---|---|
| Application | Conc. | Temp. (°C) | Recommended | Conditional | Not Recommended |
| 1. Pipes and Fittings | 98 to 100% | 23 | Carbon Steel Lined with Polypropylene Resin (DCRG 1978) | | PE, ABS, PVC I, PVC II (DPPED 1967) |
| | | 24 | Chlorinated Polyether, PP, PVDC (DCRG 1978) | | |
| | | 93 | PVDF (DCRG 1978) | | |
| 2. Valves | 100% | 21-100 | SS 316 (JSSV 1979) | | |
| 3. Pumps | 100% | 38 | GRP with FPM A "O" Ring, Bronze Fitted, All Iron (HIS 1969) | | |
| 4. Others | Technically Pure | 20 | PP<br>POM (GF) | NBR* (GF) | uPVC, PE, NR, IIR, EPDM, CR, FPM, CSM (GF) |
| | 98 to 100% | 22 | | | PVC, CPVC (TPS 1978) |
| | | 23 | | PP (TPS 1978) | |
| | | 49 | | | PP (TPS 1978) |
| | | 66 | PVDF (TPS 1978) | | |
| | | | | | NR, SBR, CR, NBR, IIR, CSM, Si, EPDM (GPP) |
| | 100% | 24-100 | Glass (CDS 1967) | | |

* Material was given a lower rating in a similar application by another reference.

TABLE 6 MATERIALS OF CONSTRUCTION

| Abbreviation | Material of Construction |
|---|---|
| ABS | Acrylonitrile Butadiene Styrene |
| | Bronze |
| | Chlorinated Polyether |
| CPVC | Chlorinated Polyvinyl Chloride |
| CR | Polychloroprene (Neoprene) |
| CSM | Chlorosulphonated Polyethylene (Hypalon) |
| EPDM | Ethylene Propylene Rubber |
| FPM | Fluorine Rubber (Viton) |
| GRP | Glass Reinforced Vinyl Ester |
| | Glass |
| | Iron |
| IIR | Isobutylene/Isoprene (Butyl) Rubber |
| NBR | Acrylonitrile/Butadiene Rubber (Nitrile, Buna N) |
| NR | Natural Rubber |
| | Nickel-Copper Alloy (Monel) |
| PE | Polyethylene |
| POM | Polyoxymethylene |
| PP | Polypropylene |
| PVC (followed by grade, if any) | Polyvinyl Chloride |
| PVDC | Polyvinylidene Chloride |
| PVDF | Polyvinylidene Fluoride |
| SBR | Styrene/Butadiene (GR-5, Buna S) |
| Si | Silicone |
| SS (followed by grade) | Stainless Steel |
| uPVC | Unplasticized Polyvinyl Chloride |

# 5 CONTAMINANT TRANSPORT

## 5.1 General Summary

When toluene is spilled on water, since it is only slightly soluble and is less dense than water, only a very small amount dissolves. The rest slowly evaporates.

When spilled on the ground, toluene forms a pool that penetrates the soil at a rate dependent on the soil type and its degree of saturation with water. During downward transport, it adsorbs onto the soil. If it reaches the water table, it may cause environmental problems.

The following factors are considered for the transport of a toluene spill in the air, water and soil media:

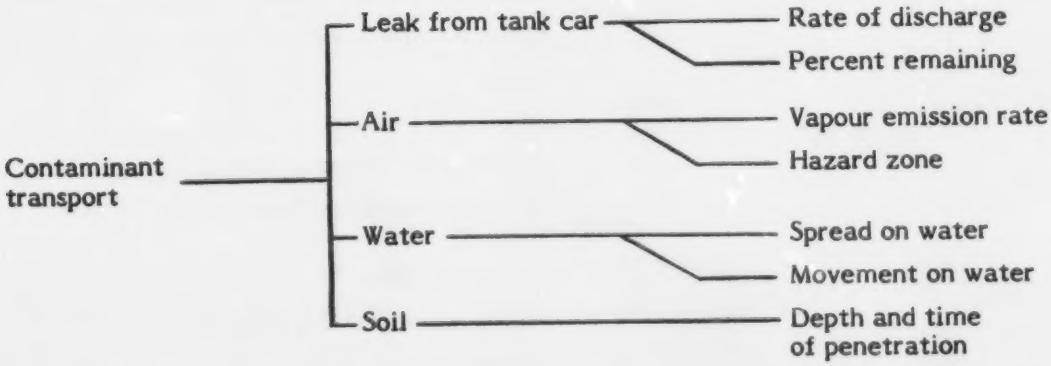


It is important to note that, because of the approximate nature of the contaminant transport calculations, the approach adopted throughout has been to use conservative estimates of critical parameters so that predictions are approaching worst case scenarios for each medium. This may require that the assumptions made for each medium be quite different; however, the assumptions for each medium are consistent throughout the EnviroTIPS series, allowing comparison of the behaviours of different chemicals.

## 5.2 Leak Nomograms

**5.2.1 Introduction.** Toluene is commonly transported in railway tank cars as a non-pressurized liquid. While the capacities of the tank cars vary widely, one tank car size has been chosen for development of the leak nomograms. It is approximately 2.75 m in diameter and 13.4 m long, with a carrying capacity of about 80,000 L. This standard volume has been chosen for the EnviroTIPS to allow comparison of the behaviours of the different chemicals.

If a tank car loaded with toluene is punctured in the bottom, all of the contents will drain out by gravity. The aim of the nomograms is to provide a simple means to obtain the time history of the conditions in the tank car and the discharge rate of the liquid. Because of the relatively low volatility of toluene, no leak nomograms have been prepared for vapour release from a puncture in the top of the tank.

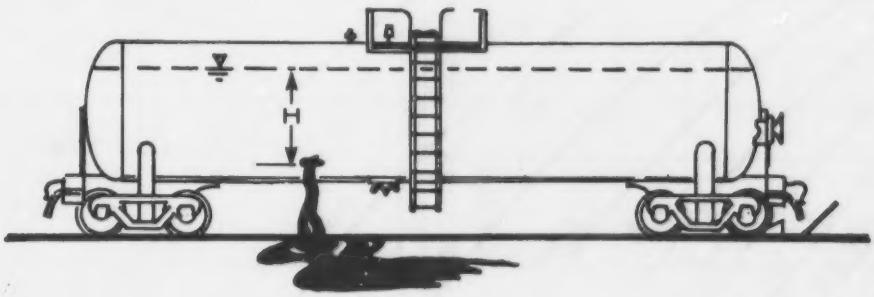


FIGURE 9 TANK CAR WITH PUNCTURE HOLE IN BOTTOM

### 5.2.2 Nomograms

**5.2.2.1 Figure 10: Percent remaining versus time.** Figure 10 provides a means of estimating the percent of liquid remaining in the standard tank car after the time of puncture, for a number of different hole diameters. The hole diameter is actually an equivalent diameter and can be applied to a noncircular puncture.

The standard tank car chosen for these nomograms is assumed to be initially full (at t=0) with a volume of about 80,000 L of toluene. The amount remaining at any time (t) is not only a function of the discharge rate over time, but also of the size and shape of the tank car.

**5.2.2.2 Figure 11: Discharge rate versus time.** Figure 11 provides a means of estimating the instantaneous discharge rate (L/s) at any time (t) after the time of puncture for a number of equivalent hole diameters. The nomogram is only applicable to the standard tank car size with an initial volume of 80,000 L.

FIGURE 10

TOLUENE

**PERCENT REMAINING VS TIME**

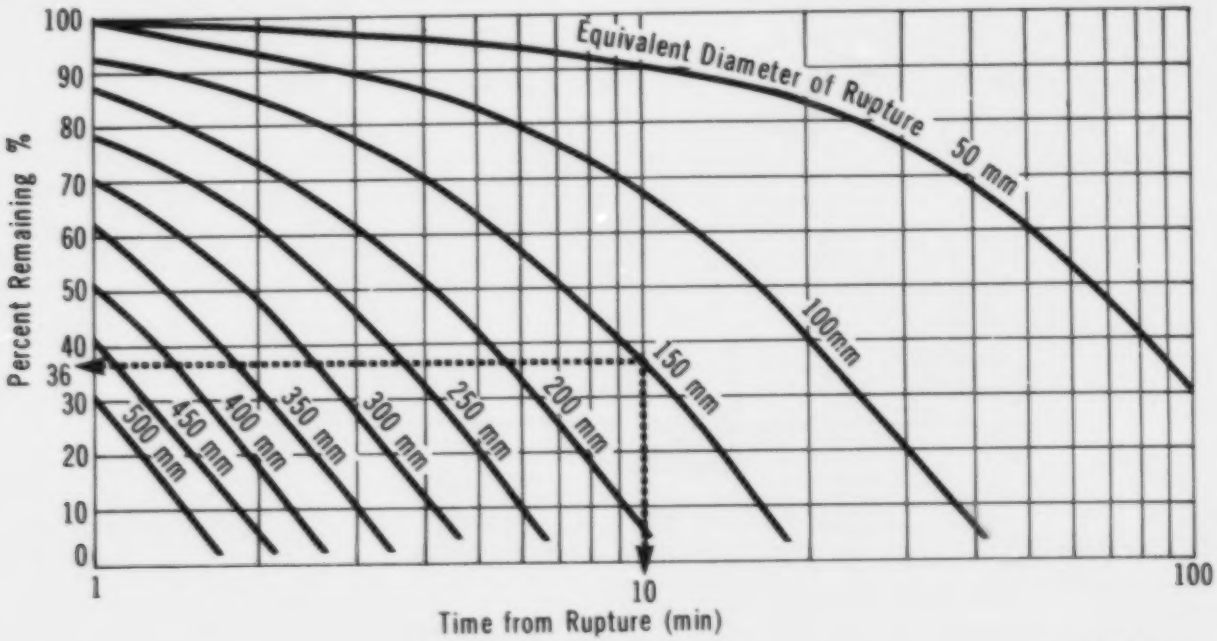


FIGURE 11

TOLUENE

**DISCHARGE RATE VS TIME**

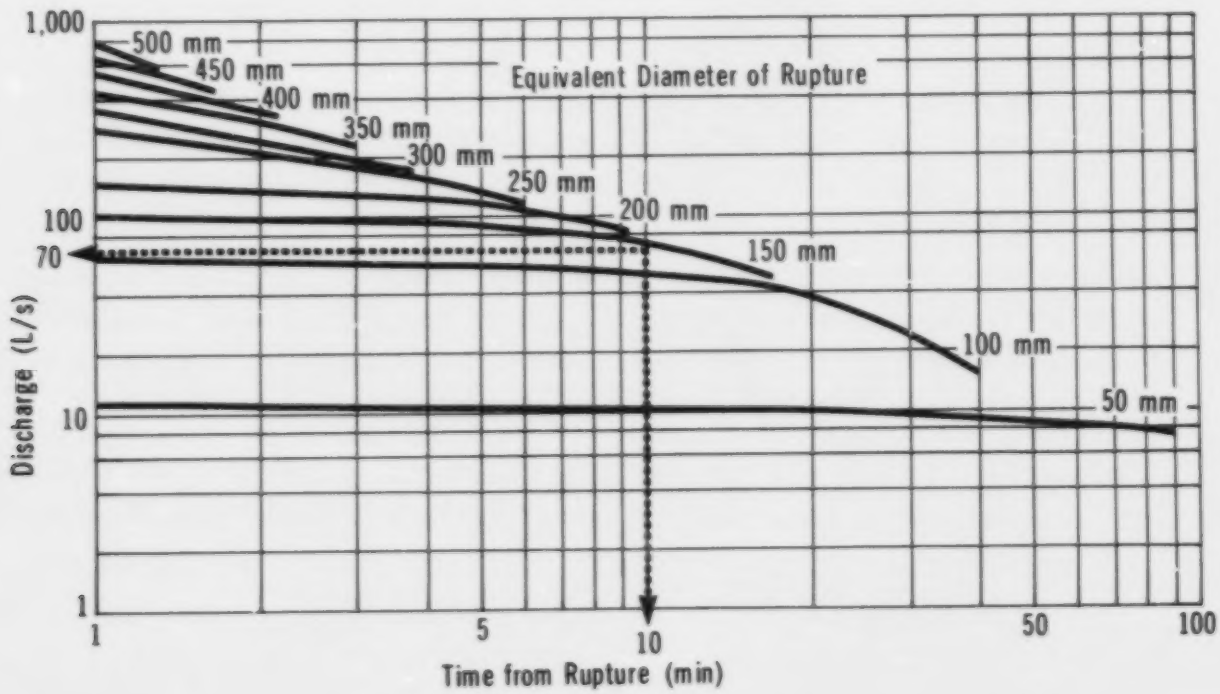

**5.2.3 Sample Calculations.**

i) Problem A

The standard tank car (2.75 m Ø x 13.4 m long) filled with toluene has a bottom puncture. The equivalent diameter of the hole is 150 mm. What percent of the initial 80,000 L remains after 10 minutes?

Solution to Problem A

- Use Figure 10
- With t=10 min and d=150 mm, the amount remaining is approximately 36 percent or 28,800 L

ii) Problem B

With the same conditions as Problem A, what is the instantaneous discharge rate from the tank 10 minutes after the accident?

Solution to Problem B

- Use Figure 11
- With t=10 min and d=150 mm, the instantaneous discharge rate (q) = 70 L/s

**5.3 Dispersion in the Air**

**5.3.1 Introduction.** Since toluene has a low volatility, direct venting of the vapour to the atmosphere from a hole in a punctured vessel does not constitute a significant hazard downwind. Only vapour released from a liquid pool spilled on a ground or water surface is treated here.

To estimate the vapour concentrations downwind of the accident site for the determination of the flammability or toxicity hazard zone, the atmospheric transport and dispersion of the contaminant vapour must be modelled. The models used here are based on Gaussian formulations and are the ones most widely used in practice for contaminant concentration predictions. The model details are contained in the Introduction Manual.

Figure 12 depicts schematically the contaminant plume configuration from a continuous surface release. The dispersion model represents the liquid pool area source as a virtual point source (with the same vapour emission rate, Q) located 10 equivalent pool radii upwind.

**5.3.2 Vapour Dispersion Nomograms and Tables.** The aim of the air dispersion nomograms is to define the hazard zone due to toxicity or flammability of a vapour cloud.

FIGURE 12

TOLUENE

## SCHEMATIC OF CONTAMINANT PLUME

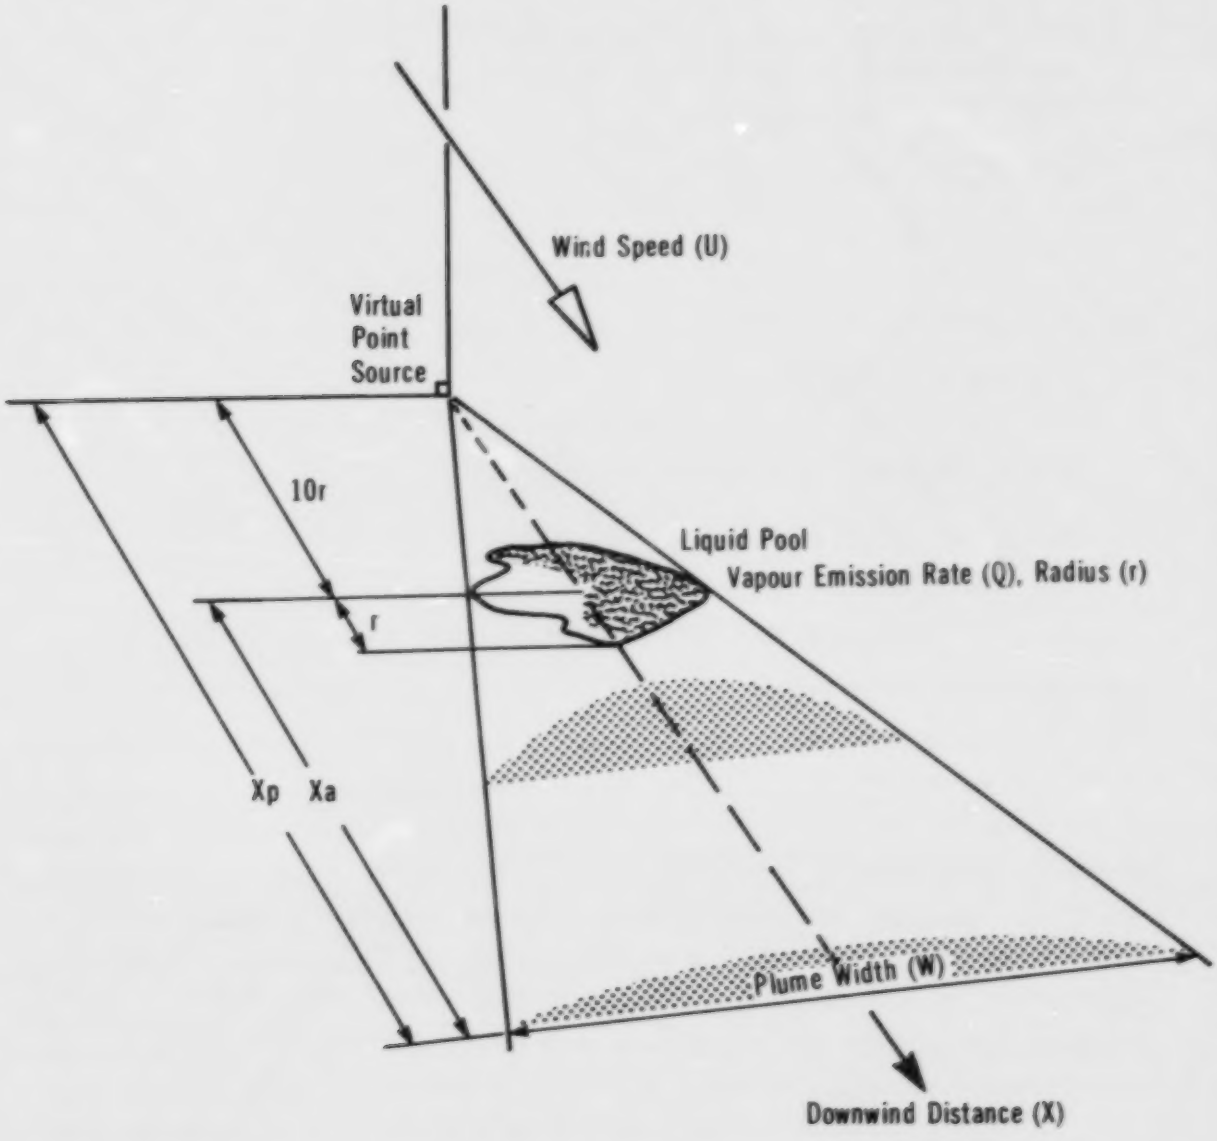

The following nomograms and data tables are contained in this section (to be used in order given):

| | |
|---|---|
| Figure 14: | vapour emission rate from a liquid pool as a function of maximum pool radius |
| Table 7: | weather conditions |
| Figure 15: | normalized vapour concentration as a function of downwind distance and weather conditions |
| Table 8: | maximum plume hazard half-widths |
| Figure 18: | vapour plume travel distance as a function of time elapsed since the spill and wind speed |

The flow chart given in Figure 13 outlines the steps necessary to make vapour dispersion calculations and identifies the nomograms or tables to be used. This section deals only with the portion contained within the dashed box. Data on "total liquid discharged" and "equivalent pool radius" are contained in Sections 5.2 and 5.4, respectively. A description of the vapour dispersion nomogram and its use follows.

5.3.2.1 **Figure 14: Vapour emission rate versus liquid spill radius for various temperatures.** An evaporation rate for toluene has been calculated employing the evaporation rate equations contained in the Introduction Manual. The computed evaporation rate for toluene at 20°C and a wind speed of 4.5 m/s (16.1 km/h) is 0.54 g/($m^2$·s). Evaporation rates at other temperatures have been calculated using the evaporation rate equation which, at a given wind speed, is dependent on ambient temperature and the vapour pressure (Chem. Eng. 1975) of toluene at that temperature. For example, evaporation rates of 0.217 g/($m^2$·s) at 0°C and 1.08 g/($m^2$·s) at 30°C were calculated for a wind speed of 4.5 m/s.

Using Figure 21, Section 5.4, the maximum spill radius corresponding to various spill amounts of toluene may be determined. The resultant spill areas and the toluene evaporation rates provide the basis for preparation of the vapour release rate versus spill radius nomogram in Figure 14.

Use: For a pool of toluene of known radius, the rate (Q) at which toluene vapour is released to the atmosphere at a given temperature can be estimated from Figure 14. The solid portion of the curves represents spills of 0.1 to 70 tonnes, the latter representing about one standard 80,000 L rail car load of toluene. It should be noted that Figure 14 is valid for a wind speed of 4.5 m/s (16.1 km/h) and therefore can only be used to provide an approximation of toluene vapour emission rates at other wind speeds. The

FIGURE 13

TOLUENE

## FLOW CHART TO DETERMINE VAPOUR HAZARD ZONE

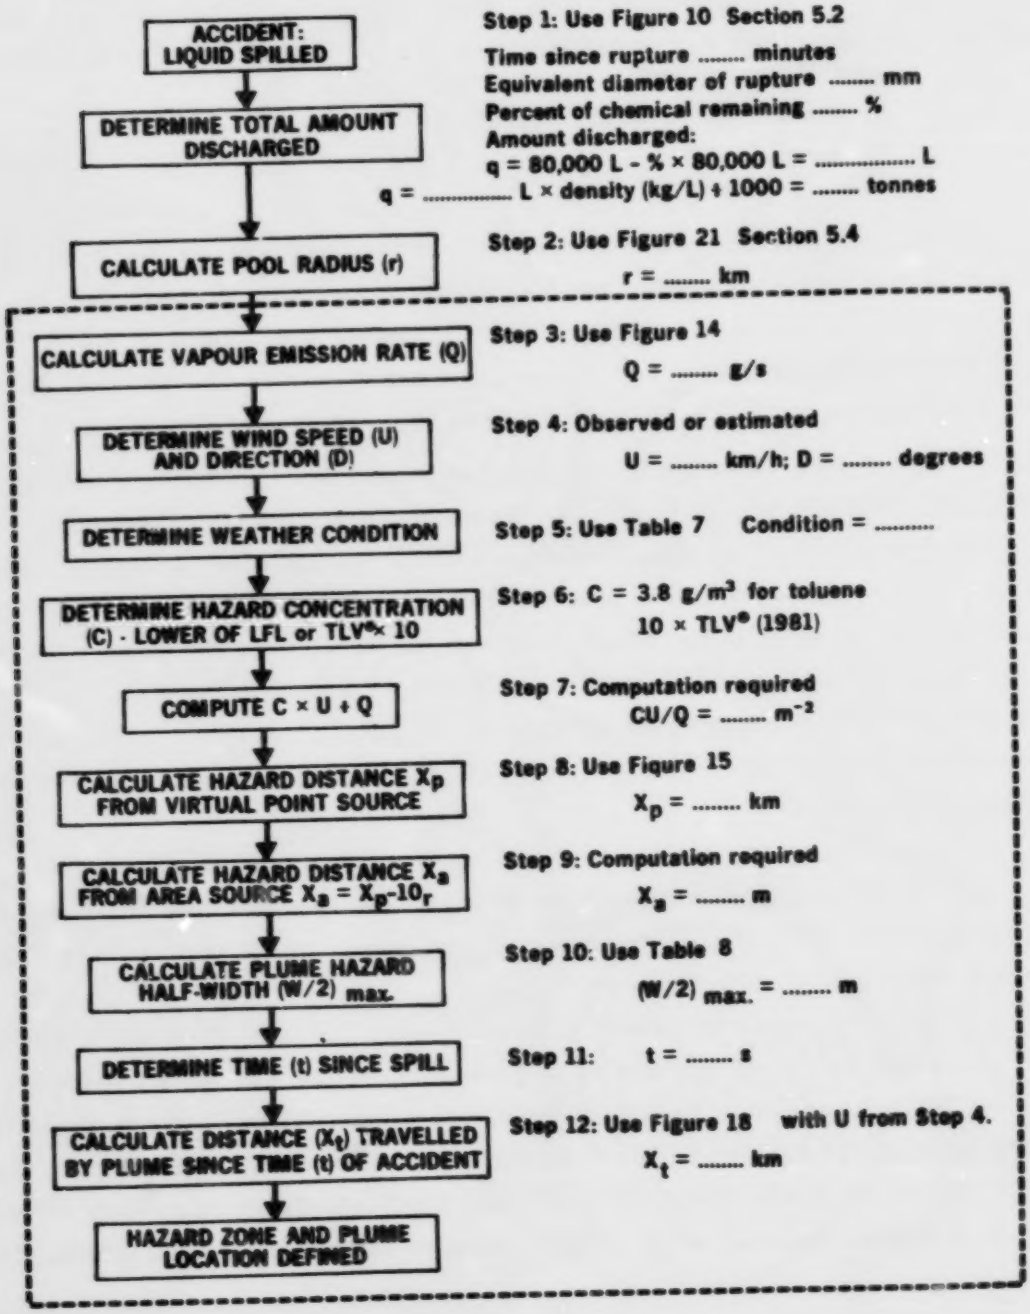
ACCIDENT: LIQUID SPILLED
DETERMINE TOTAL AMOUNT DISCHARGED
CALCULATE POOL RADIUS (r)
CALCULATE VAPOUR EMISSION RATE (Q)
DETERMINE WIND SPEED (U) AND DIRECTION (D)
DETERMINE WEATHER CONDITION
DETERMINE HAZARD CONCENTRATION (C) - LOWER OF LFL or TLV® × 10
COMPUTE C × U ÷ Q
CALCULATE HAZARD DISTANCE Xp FROM VIRTUAL POINT SOURCE
CALCULATE HAZARD DISTANCE Xa FROM AREA SOURCE Xa = Xp-10r
CALCULATE PLUME HAZARD HALF-WIDTH (W/2) max.
DETERMINE TIME (t) SINCE SPILL
CALCULATE DISTANCE (Xt) TRAVELLED BY PLUME SINCE TIME (t) OF ACCIDENT
HAZARD ZONE AND PLUME LOCATION DEFINED
Step 1: Use Figure 10 Section 5.2
Time since rupture ..... minutes
Equivalent diameter of rupture ..... mm
Percent of chemical remaining ..... %
Amount discharged:
q = 80,000 L - % × 80,000 L = ..... L
q = ..... L × density (kg/L) ÷ 1000 = ..... tonnes
Step 2: Use Figure 21 Section 5.4
r = ..... km
Step 3: Use Figure 14
Q = ..... g/s
Step 4: Observed or estimated
U = ..... km/h; D = ..... degrees
Step 5: Use Table 7 Condition = .....
Step 6: C = 3.8 g/m³ for toluene
10 × TLV® (1981)
Step 7: Computation required
CU/Q = ..... m⁻²
Step 8: Use Figure 15
Xp = ..... km
Step 9: Computation required
Xa = ..... m
Step 10: Use Table 8
(W/2) max. = ..... m
Step 11: t = ..... s
Step 12: Use Figure 18 with U from Step 4.
Xt = ..... km

FIGURE 14

TOLUENE

## VAPOUR EMISSION RATE vs LIQUID SPILL RADIUS FOR VARIOUS TEMPERATURES *

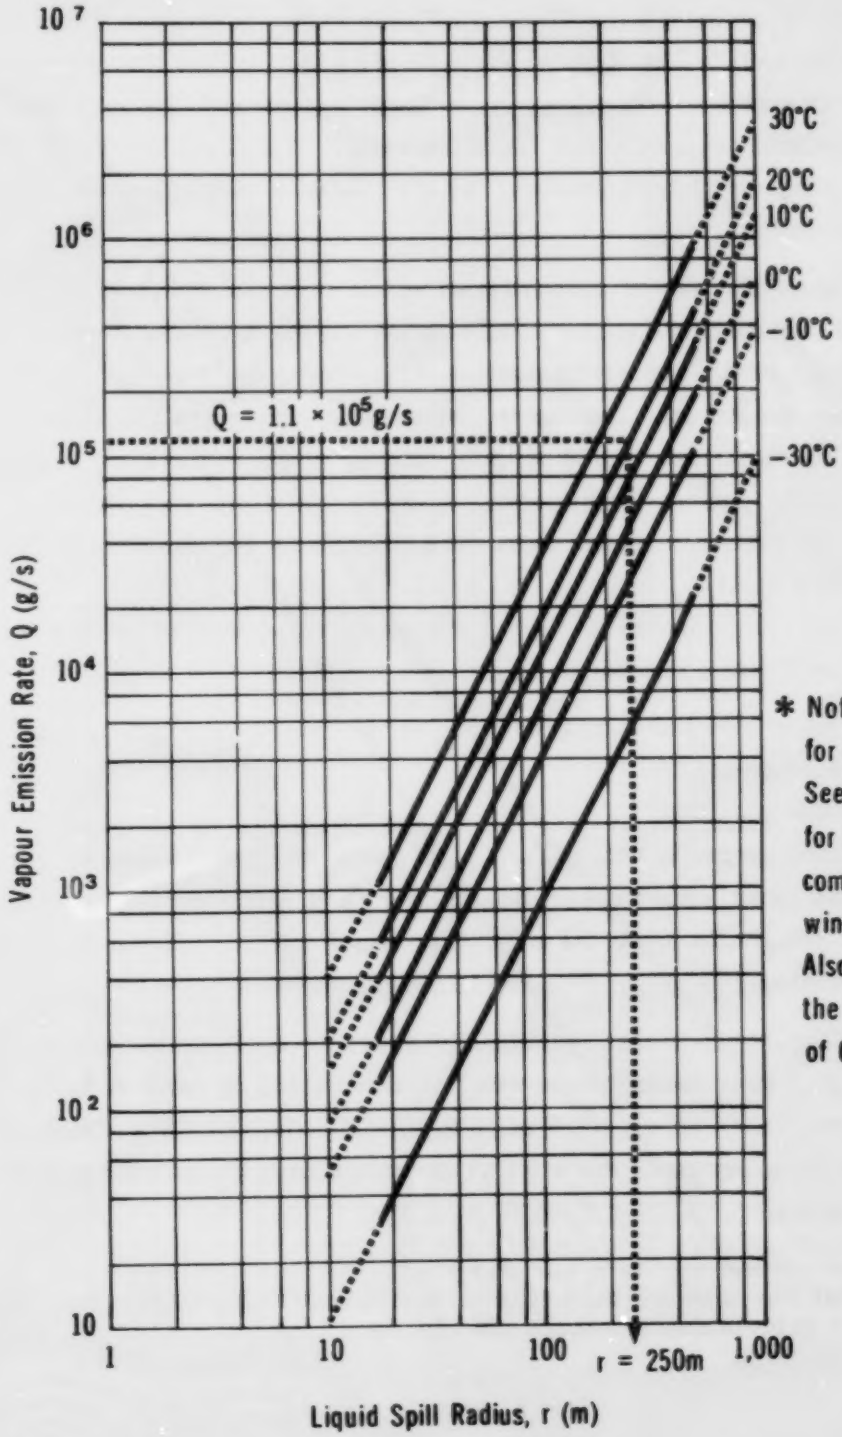


* Note: Nomogram applies for wind speed of 4.5 m/s See Introduction Manual for relationships to compute values for other wind speeds, if necessary. Also, the solid portions of the curves represent spills of 0.2 to 70 tonnes

Introduction Manual contains the appropriate equation to convert the evaporation rate at a wind speed of 4.5 m/s to an evaporation rate at another wind speed should it be desired.

It should also be noted that the determination of the evaporation rate is based on the spill radius on calm water (Table VI, CHRIS 1974). Since calm water represents a flat, unbounded surface compared to the type of ground surface that would normally be encountered in a spill situation (namely, irregular and porous), the spill radius on calm water is considered to provide the maximum value. Therefore, when spills on land are assessed by using the water algorithm, the spill radius is overestimated and worst case values are provided.

**5.3.2.2 Figure 15: Vapour concentration versus downwind distance.** Figure 15 shows the relationship between the vapour concentration and the downwind distance for weather conditions D and F. The nomograms were developed using the dispersion models described in the Introduction Manual. The vapour concentration is represented by the normalized, ground-level concentration (CU/Q) at the centreline of the contaminant plume. Weather condition F is the poorest for dispersing a vapour cloud and condition D is the most common in most parts of Canada. Before using Figure 15, the weather condition must be determined from Table 7.

Use: The maximum hazard distance, $X_p$, downwind of the spill can be calculated from Figure 15 knowing:

- Q, the vapour emission rate (g/s)
- U, the wind speed (m/s)
- the weather condition
- the hazard concentration limit, C, which is the lower value of 10 times the Threshold Limit Value• (TLV• in $g/m^3$), or the Lower Flammability Limit (LFL in $g/m^3$). Note: To convert the TLV• (in ppm) and the LFL (in % by volume) to concentrations in $g/m^3$, use Figures 16 and 17.

A hazard concentration limit of 10 times the TLV• has been arbitrarily chosen as it represents a more realistic level at which there would be concern for human health on the short term (i.e., on the order of 30 minutes)*. The TLV• is a workplace standard for long-term exposure, use of this value as the hazard limit would result in unrealistically large hazard zones.

---

* Note that this is an arbitrary figure and that health effects have been reported for exposure at lower concentrations (Chapter 7).

FIGURE 15

TOLUENE

NORMALIZED VAPOUR CONCENTRATION VS DOWNWIND DISTANCE

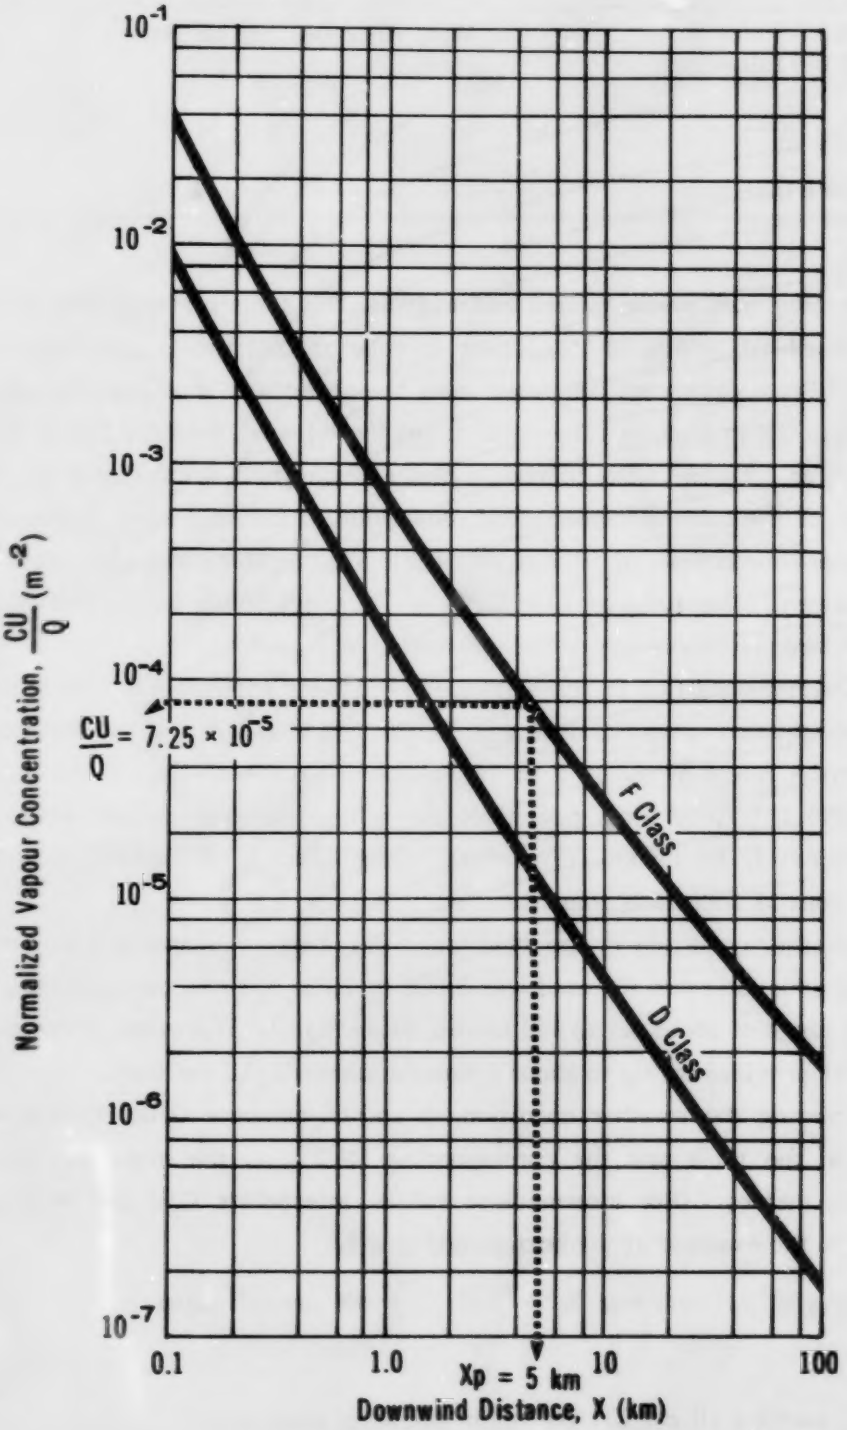

TABLE 7 WEATHER CONDITIONS

| Weather Condition F | Weather Condition D |
|---|---|
| Wind speed <11 km/h (≈ 3 m/s) and one of the following:<br>- overcast day<br>- night time<br>- severe temperature inversion | Most other weather conditions |

**5.3.2.3 Table 8: Maximum plume hazard half-widths.** This table presents data on the maximum plume hazard half-width, $(W/2)_{max}$, for a range of Q/U values under weather conditions D and F. These data were computed using the dispersion modelling techniques given in the Introduction Manual for a value of 10 times the toluene Threshold Limit Value (TLV•) of 0.38 g/m$^3$, or 3.8 g/m$^3$. The maximum plume hazard half-width represents the maximum half-width of the toluene vapour cloud, downwind of the spill site, corresponding to a hazard concentration limit of 10 x TLV•. Table 8 is therefore only applicable for a toluene hazard concentration limit of 10 x TLV• or 3.8 g/m$^3$. Also, data are provided up to a maximum hazard distance downwind of 100 km.

Under weather condition D, the wind speed (U) range applicable is 1 to 30 m/s. The range of vapour emission rates (Q) used was 30,000 to 25,000,000 g/s, corresponding to toluene spills in the range of about 5 to 10,000 tonnes, respectively. If the entire contents of an 80,000 L (17,600 Imp. gal.) tank car spills, the mass spilled would be 69,400 kg or approximately 69 tonnes. Therefore, under Class D of Table 8, data are provided for up to about 58 times this amount.

Under weather condition F, the wind speed (U) range applicable is 1 to 3 m/s. The range of vapour emission rates (Q) used was 3,000 to 2,225,000 g/s, corresponding to toluene spills in the range of about 0.5 to 400 tonnes, respectively. Therefore, under class F of Table 8, data are provided for up to about 6 times a standard rail car load.

Use: Knowing the weather condition, Q and U, compute Q/U. Choose the closest Q/U value in the table and the corresponding $(W/2)_{max}$, the maximum plume hazard half-width in metres. (For intermediate values, interpolate Q/U and $(W/2)_{max}$ values.) Also refer to the example at the bottom of Table 8.

FIGURE 16

TOLUENE

**CONVERSION OF THRESHOLD LIMIT VALUE (TLV®) UNITS (ppm to g/m³)**

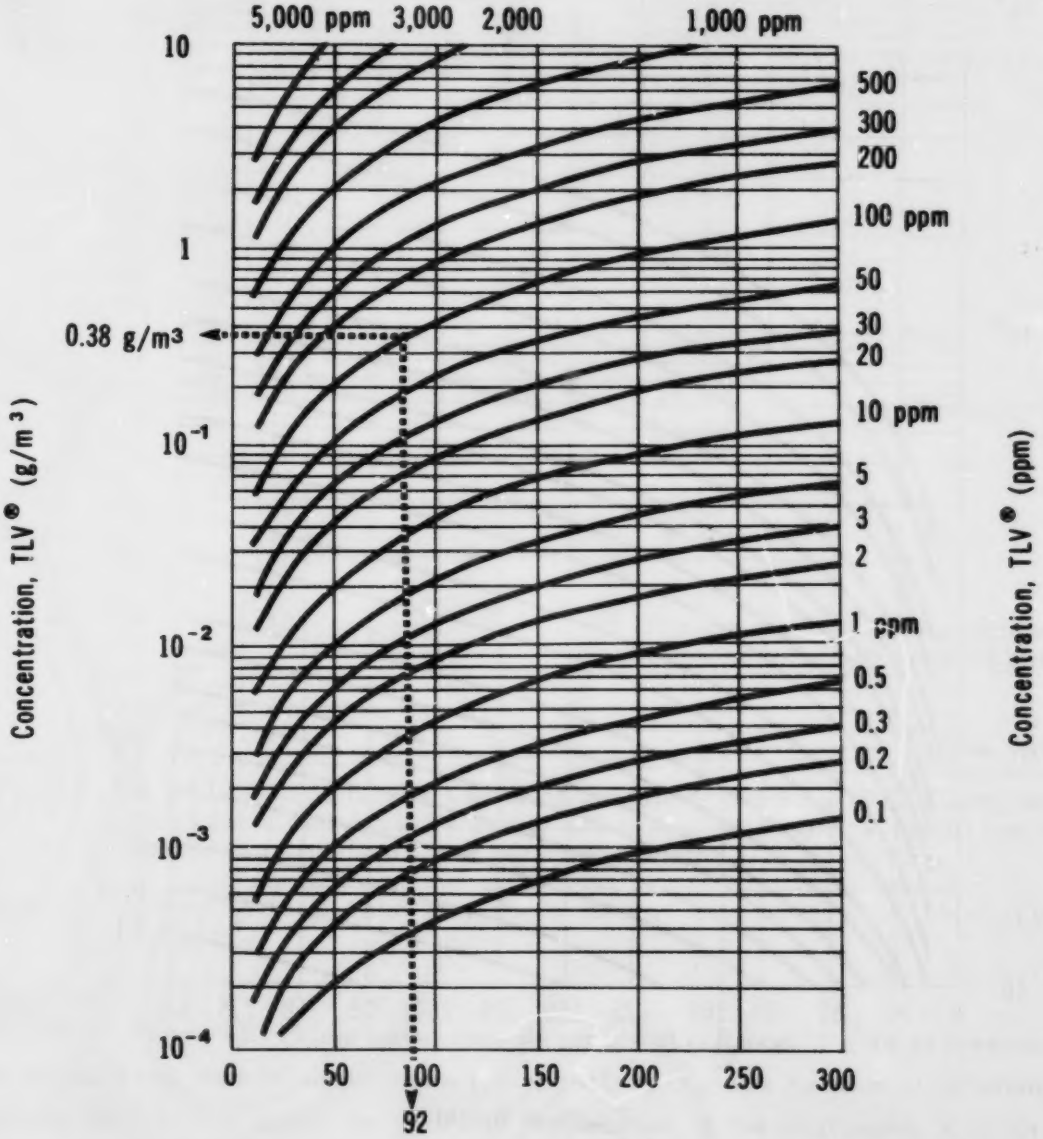


Example: Toluene, MW = 92, TLV® = 100 ppm then TLV® in g/m³ ≅ 0.38

Note: data applicable at 25° and 760 mm Hg pressure

FIGURE 17

TOLUENE

**CONVERSION OF LOWER FLAMMABILITY LIMIT (LFL) UNITS (volume % to g/m³)**

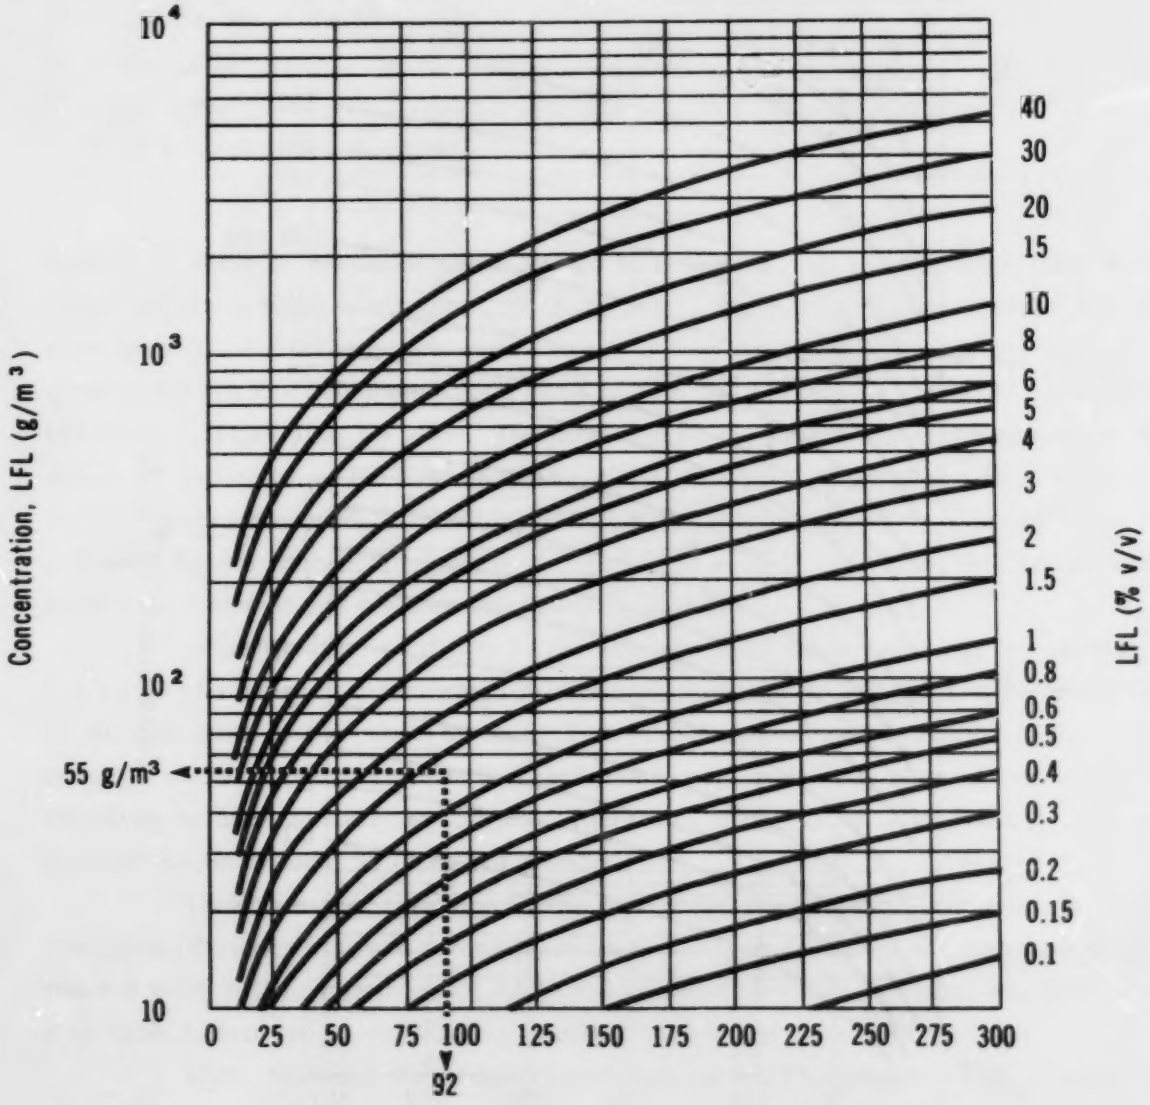


Example: Toluene, MW = 92, LFL = 1.27%,
then LFL in g/m³ = 55

Note: data applicable at 25°C and 760 mm Hg pressure

TABLE 8 MAXIMUM PLUME HAZARD HALF-WIDTHS (for toluene at 20°C)

| Weather Condition D | | | Weather Condition F | | |
|---|---|---|---|---|---|
| Q/U (g/m) | $(W/2)_{max}$ (m) | | Q/U (g/m) | $(W/2)_{max}$ (m) | |
| 25,000,000 | 3,300 | ($X_p \leq 99.5$ km)* | 2,250,000 | 1,420 | ($X_p \leq 99.5$ km)* |
| 22,500,000 | 3,090 | | 2,000,000 | 1,300 | |
| 20,000,000 | 2,870 | | 1,500,000 | 1,050 | |
| 15,000,000 | 2,405 | | 1,000,000 | 775 | |
| 12,500,000 | 2,150 | | 750,000 | 625 | |
| 10,000,000 | 1,870 | | 500,000 | 460 | |
| 7,500,000 | 1,570 | | 300,000 | 320 | |
| 5,000,000 | 1,220 | | 250,000 | 285 | |
| 2,250,000 | 745 | | 200,000 | 250 | |
| 2,000,000 | 690 | | 150,000 | 205 | |
| 1,500,000 | 580 | | 100,000 | 160 | |
| 1,000,000 | 465 | | 75,000 | 135 | |
| 750,000 | 390 | Q/U = 52,380 → | 50,000 | 100 | → $(W/2)_{max}$ = 110 m |
| 500,000 | 310 | | 25,000 | 65 | |
| 300,000 | 230 | | 10,000 | 40 | |
| 250,000 | 205 | | 5,000 | 25 | |
| 200,000 | 180 | | 2,500 | 20 | |
| 150,000 | 150 | | 1,000 | 10 | |
| 100,000 | 120 | | | | |
| 75,000 | 100 | | | | |
| 50,000 | 80 | | | | |
| 25,000 | 55 | | | | |
| 10,000 | 35 | | | | |
| 5,000 | 20 | | | | |
| 1,000 | 10 | | | | |

* Data are provided up to a maximum downwind hazard distance ($X_p$) of 100 km

Example: A spill releasing toluene vapour at the rate of $Q = 1.1 \times 10^5$ g/s under weather condition F and a wind speed U = 2.1 m/s means Q/U = 52,380 g/m which results in a maximum plume hazard half-width $(W/2)_{max}$ = 110 m.

Note: Above table is valid only for a toluene concentration of 10 x TLV®, or 3.8 g/m$^3$.

5.3.2.4 **Figure 18: Plume travel time versus travel distance.** Figure 18 presents plots of plume travel time (t) versus plume travel distance ($X_t$) as a function of different wind speeds (U). This is simply the graphical presentation of the relationship $X_t = Ut$ for a range of typical wind speeds.

FIGURE 18

TOLUENE

**PLUME TRAVEL TIME VS TRAVEL DISTANCE**

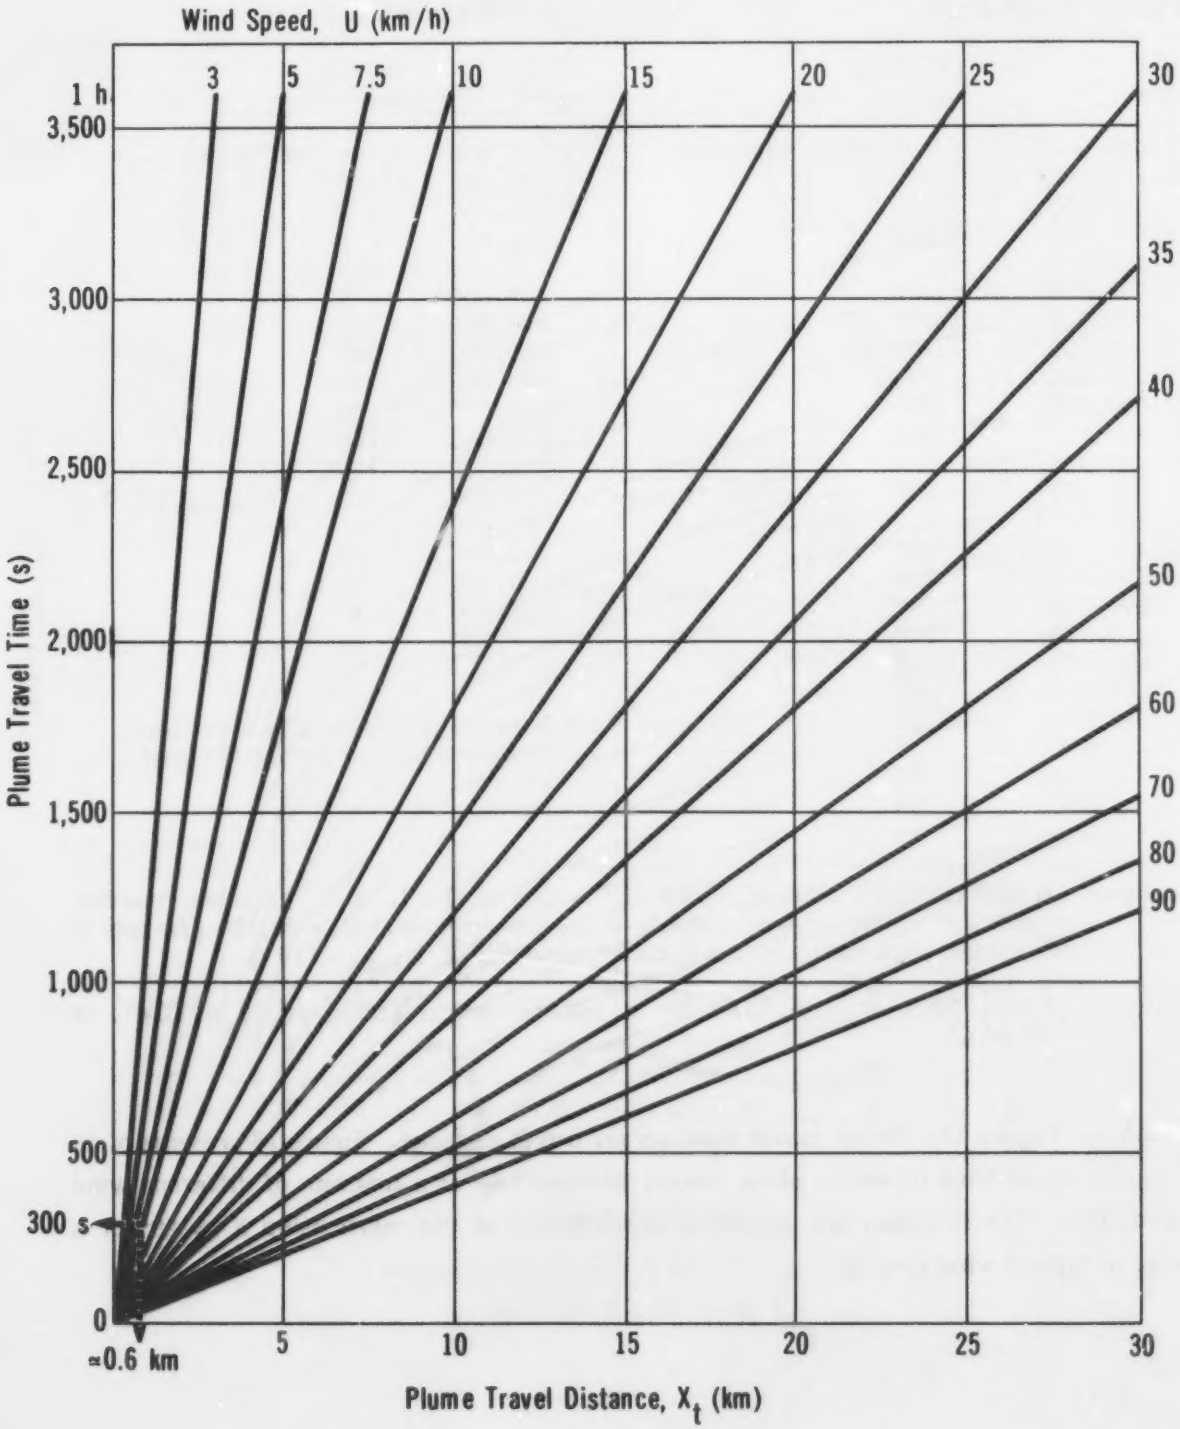

Use: Knowing the time (t) since the spill occurred and the wind speed (U), the distance ($X_t$) can be determined which indicates how far downwind the plume has travelled.

**5.3.3 Sample Calculation.** The sample calculation given below is intended to outline the steps required to estimate the downwind hazard zone which could result from a spill of liquid toluene. The user is cautioned to take note of the limitations in the calculation procedures described herein and in the Introduction Manual. The estimates provided here apply only for conditions given. It is recommended that the user employ known or observational estimates (i.e., of the spill radius) in a particular spill situation if possible.

Problem:

During the night, at about 2:00 a.m., 20 tonnes of toluene were spilled on a flat ground surface. It is now 2:05 a.m. The temperature is 20°C and the wind is from the NW at 7.5 km/h. Determine the extent of the vapour hazard zone.

Solution

Step 1: Quantity spilled is given, q = 20 tonnes

Step 2: Determine pool radius (r) for spill of 20 tonnes

- Use observed (measured) pool radius if possible. If not, use the maximum radius from Figure 21, Section 5.4. Note that use of these data, which apply specifically to spills on water, will result in an exaggerated pool radius on land
- Radius (r) = 250 m ÷ 1,000 = 0.25 km

Step 3: Calculate vapour emission rate (Q) at T = 20°C

- From Figure 14, for r = 250 m and T = 20°C, Q = $1.1 \times 10^5$ g/s

Step 4: Determine wind speed (U) and direction (D)

- Use available weather information, preferably on-site observations
- Given:

  U = 7.5 km/h, then U = 7.5 ÷ 3.6 = 2.1 m/s

  D = NW or 315° (D = Direction from which wind is blowing)

Step 5: Determine weather condition

- From Table 7, weather condition = F since U is less than 11 km/h and it is night

Step 6: Determine hazard concentration limit (C)

- This is the lower of 10 times the TLV•, or the LFL, so for toluene $C = 3.8\ g/m^3$ ($TLV^{\bullet} = 0.38\ g/m^3$; $LFL = 55\ g/m^3$)

Step 7: Compute CU/Q

- $$CU/Q = \frac{3.8 \times 2.1}{1.1 \times 10^5} = 7.25 \times 10^{-5}\ m^{-2}$$

Step 8: Calculate downwind distance ($X_p$) from the virtual point source

- From Figure 15 with $CU/Q = 7.25 \times 10^{-5}\ m^{-2}$ and weather condition F, $X_p = 5.0$ km

Step 9: Calculate hazard distance ($X_a$) downwind of the area source

- With $X_p = 5.0$ km and $r = 0.25$ km,
  then $X_a = X_p - 10\,r = 5.0\ km - 10\ (0.25\ km) = 2.5$ km

Step 10: Calculate plume hazard half-width $(W/2)_{max}$

- Use Table 8
- With $Q = 1.1 \times 10^5$ g/s and $U = 2.1$ m/s
  then $$Q/U = \frac{1.1 \times 10^5}{2.1} = 52{,}380\ g/m$$
- Then for weather condition F the closest Q/U value is between 50,000 and 75,000 g/m, which gives $(W/2)_{max} = 110$ m

Step 11: Determine the time since spill

- $t = 5\ min \times 60 = 300$ s

Step 12: Calculate distance travelled ($X_t$) by vapour plume since time of accident

- Using Figure 18 with $t = 300$ s and $U = 7.5$ km/h, then $X_t = 0.6$ km (more accurately from $Ut = 2.1\ m/s \times 300\ s = 630\ m = 0.63$ km)

Step 13: Map the hazard zone

- This is done by drawing a rectangular area with dimensions of twice the maximum plume hazard half-width (110 m) by the maximum hazard distance downwind of the area source (2.5 km) along the direction of the wind, as shown in Figure 19
- If the wind is reported to be fluctuating by 20° about 315° (or from 315° $\pm$ 10°), the hazard zone is defined as shown in Figure 20

FIGURE 19

TOLUENE

**HAZARD AREA FOR STEADY WINDS, EXAMPLE PROBLEM**

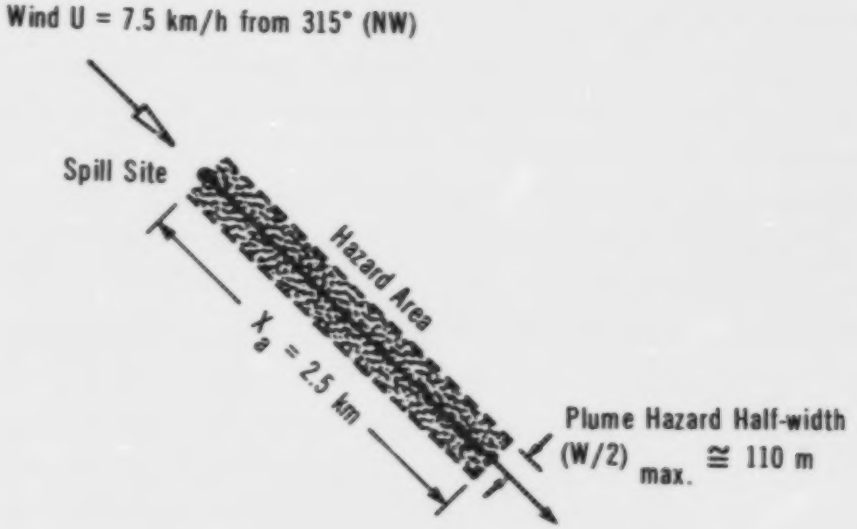


FIGURE 20

TOLUENE

**HAZARD AREA FOR UNSTEADY WINDS, EXAMPLE PROBLEM**

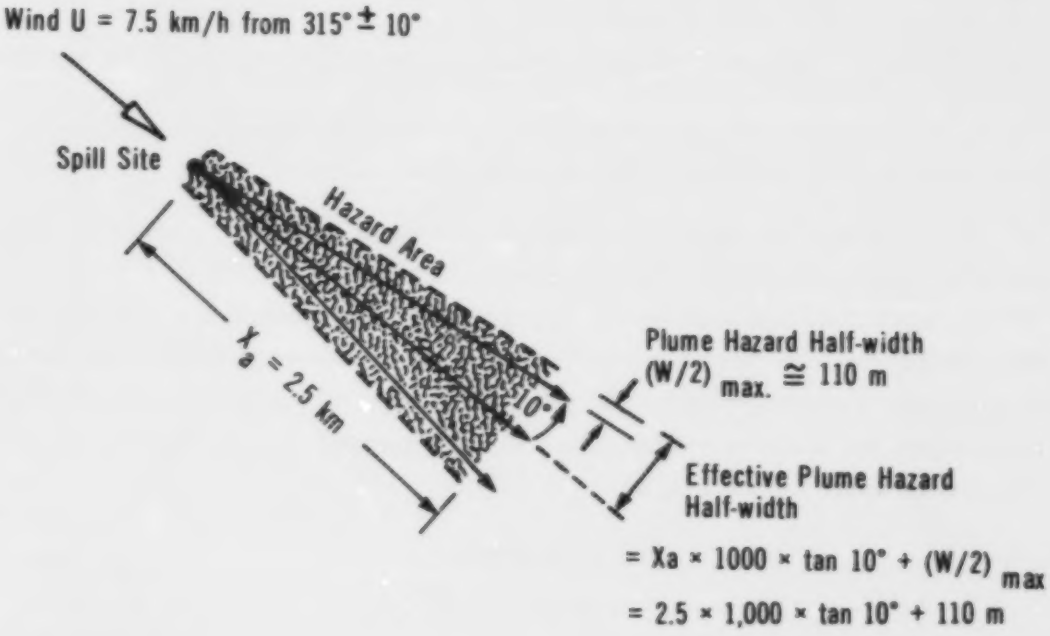
Wind U = 7.5 km/h from 315° ± 10°
Spill Site
Hazard Area
$X_a$ = 2.5 km
10°
Plume Hazard Half-width
$(W/2)_{max.} \cong$ 110 m
Effective Plume Hazard Half-width
= Xa × 1000 × tan 10° + $(W/2)_{max}$
= 2.5 × 1,000 × tan 10° + 110 m

- Note that the plume has only travelled 0.63 km in the 5 minutes since the spill. At a wind speed of 7.5 km/h there remain 15 minutes before the plume reaches the maximum downwind hazard distance of 2.5 km

## 5.4 Behaviour with Water

**5.4.1 Introduction.** The rate of spreading on water is based on the balance between forces tending to spread the liquid (gravity and surface tension) and those tending to resist spreading (inertial and viscous forces).

In addition to the natural spreading tendency, the spill slick will move in the same direction and at the same speed as the surface water. Surface water direction and speed are influenced by currents and wind forces.

Factors considered in the spill nomograms are illustrated in the following chart:

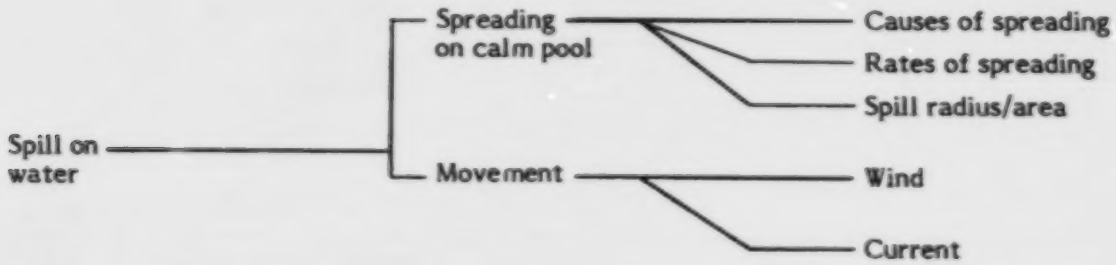


**5.4.2 Nomograms.** The following nomograms are presented to simplify calculations:

Figure 21: spill radius versus time (still water - unconfined) for various sizes of spills; maximum spill radius indicated

Figure 22: length of channel affected versus equivalent spill radius (still water - confined) for a number of stream widths

Figure 23: translation distance versus time for a range of surface water velocities

Figure 24: vectoral addition of surface current and wind

**5.4.2.1 Figure 21: Spill radius versus time (still water - unconfined).** Figure 21 provides a means of calculating the radius/area of an unconfined slick of toluene for a known mass of spill and at a defined time from the occurrence of the spill. The equations representing the spreading of the spill on water are presented in the Introduction Manual. A critique of a spreading model (Eisenberg 1975) suggests that the equations are valid for cases where the viscosity of the spilled liquid is greater than or equal to 0.2 times the viscosity of water ($U_L \geq 0.2\ U_w$).

FIGURE 21

TOLUENE

**SPILL RADIUS VS TIME**
**(still water - unconfined)**

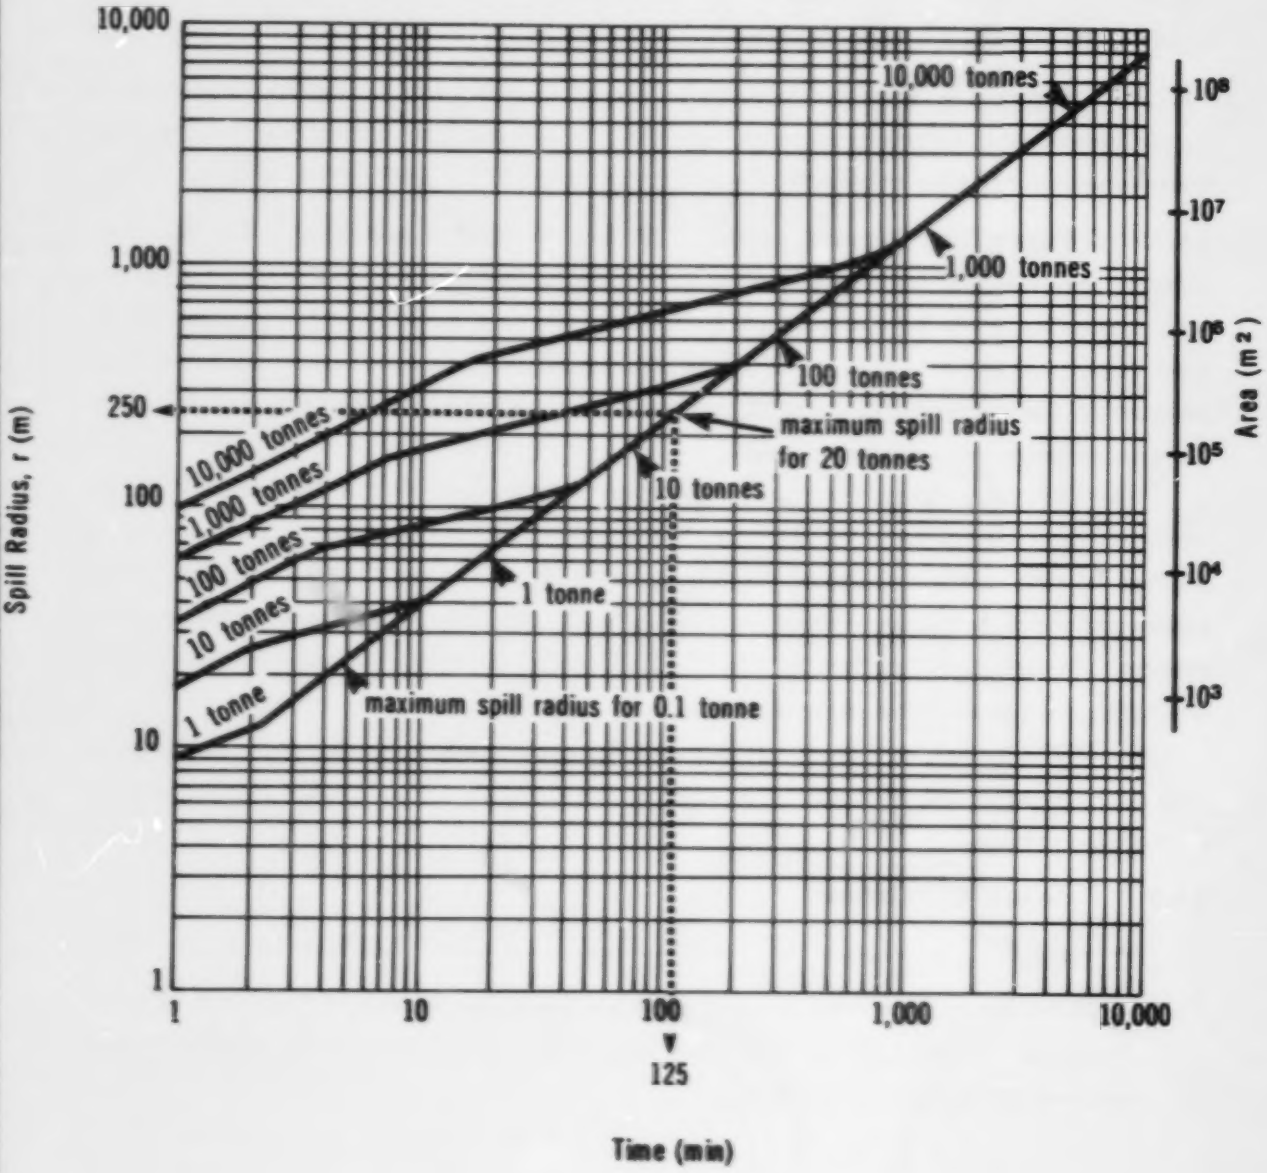

For the purposes of the nomogram presented, the water/spill temperature has been taken at 20°C, representing a reasonable maximum for surface water bodies. This condition maximizes the spill size at any time of interest. If the indicated pool radius is larger than the theoretical maximum radius, use the theoretical maximum pool radius.

**5.4.2.2 Figure 22: Length of channel affected versus equivalent spill radius (still water - confined).** If the distance between the banks of the water body is less than the spill diameter, the slick will be confined. Using the effective radius of spill from Figure 21, the approximate length of channel affected by the spill can be computed from Figure 22, if the stream width is known.

**5.4.2.3 Figure 23: Translation distance versus time (no wind).** Figure 23 presents a simple relationship between velocity, time and distance. The distance a spill will be transported by a flowing stream is directly proportional to the surface current.

**5.4.2.4 Figure 24: Vectoral addition of surface current and wind.** To take into account the effect of both wind and surface current, the spill slick is assumed to move with a velocity given by the vectoral addition of current velocity and 3 percent of the wind velocity (Raj 1974; Fingas 1979, 1980). Figure 24 is designed to simplify vectoral addition of the current and velocity components. The horizontal velocity axis is scaled for wind velocity in kilometres per hour.

The surface current vector is added to the wind vector by determining its direction relative to the wind direction. The length of the surface current vector is defined by the vertical surface current velocity scale in m/s. The resultant vector represents the direction and velocity the spill slick will be moving due to wind and current effects. The length of the resultant vector represents the spill translation velocity (m/s) when measured against the vertical scale.

The nomogram does not account for deformation of the slick shape when influenced by wind and/or surface currents, or for any losses which occur by evaporation or any other means.

**5.4.3 Sample Calculations**

i) Problem A

A 20 tonne spill of toluene has occurred on a large lake. The wind is calm. Determine the size of the spill after 20 minutes, together with the maximum spill size and approximate time taken.

FIGURE 22

TOLUENE

**LENGTH OF CHANNEL AFFECTED VS SPILL RADIUS (still water - confined)**

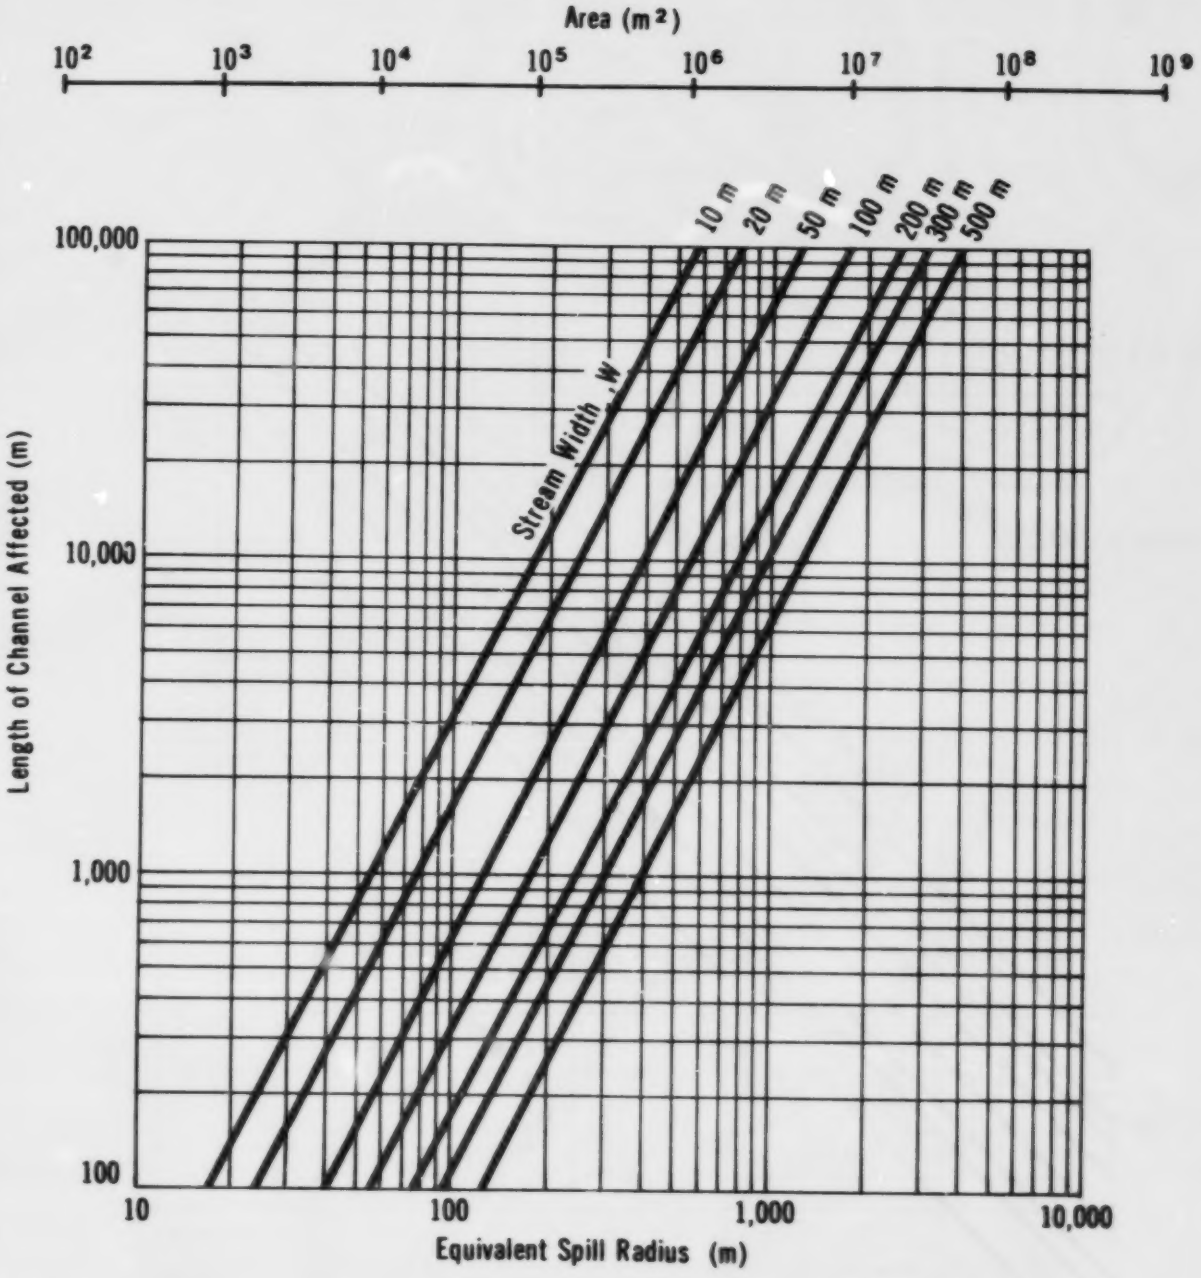

FIGURE 23

TOLUENE

## TRANSLATION DISTANCE vs TIME (No wind)

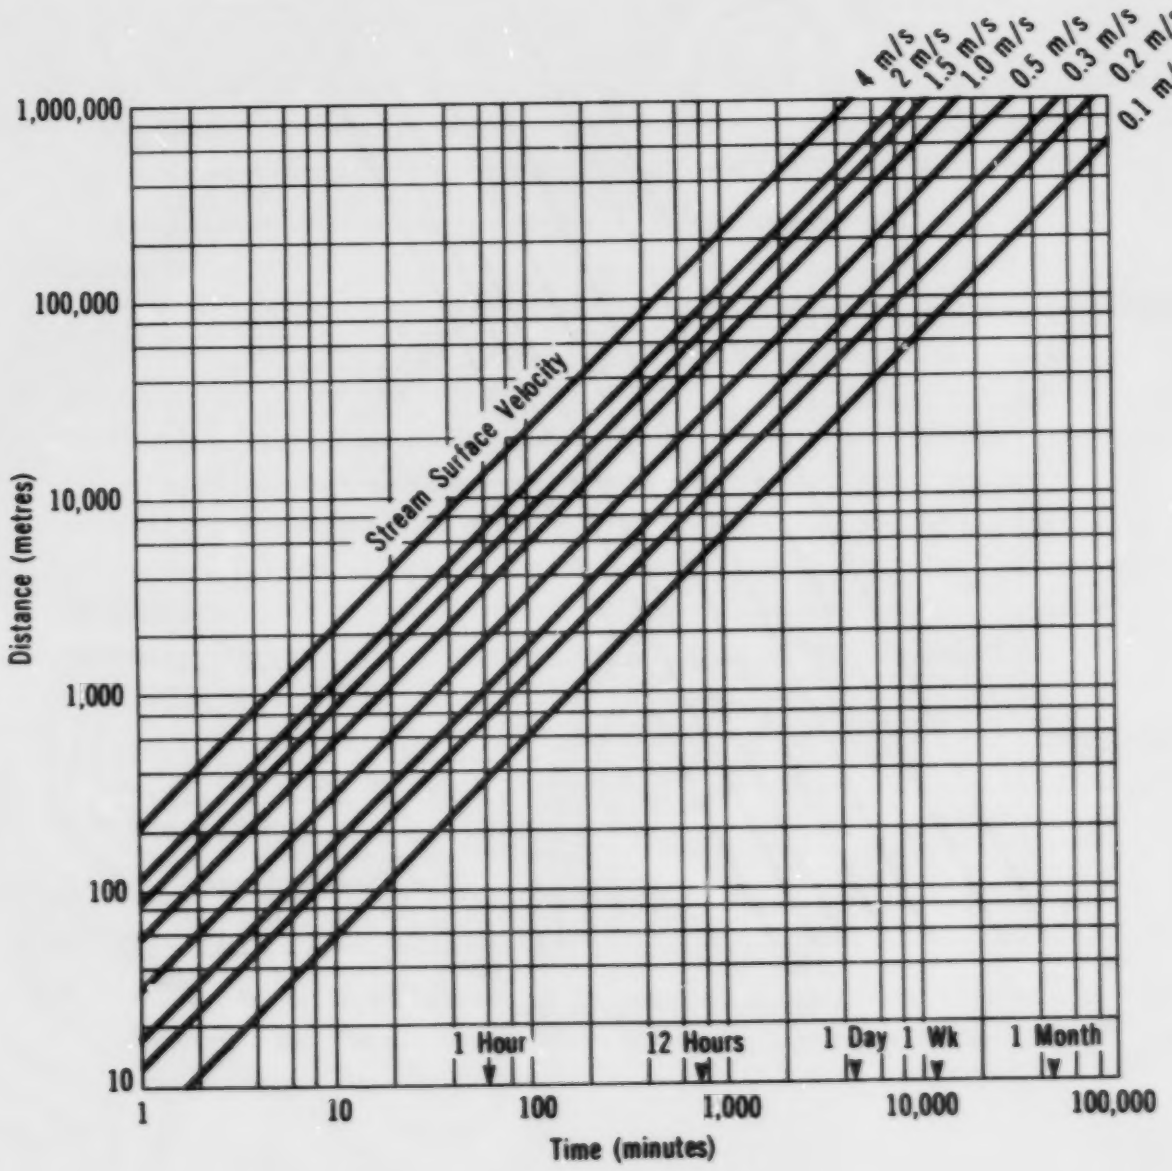

FIGURE 24

TOLUENE

VECTORAL ADDITION OF SURFACE CURRENT AND WIND

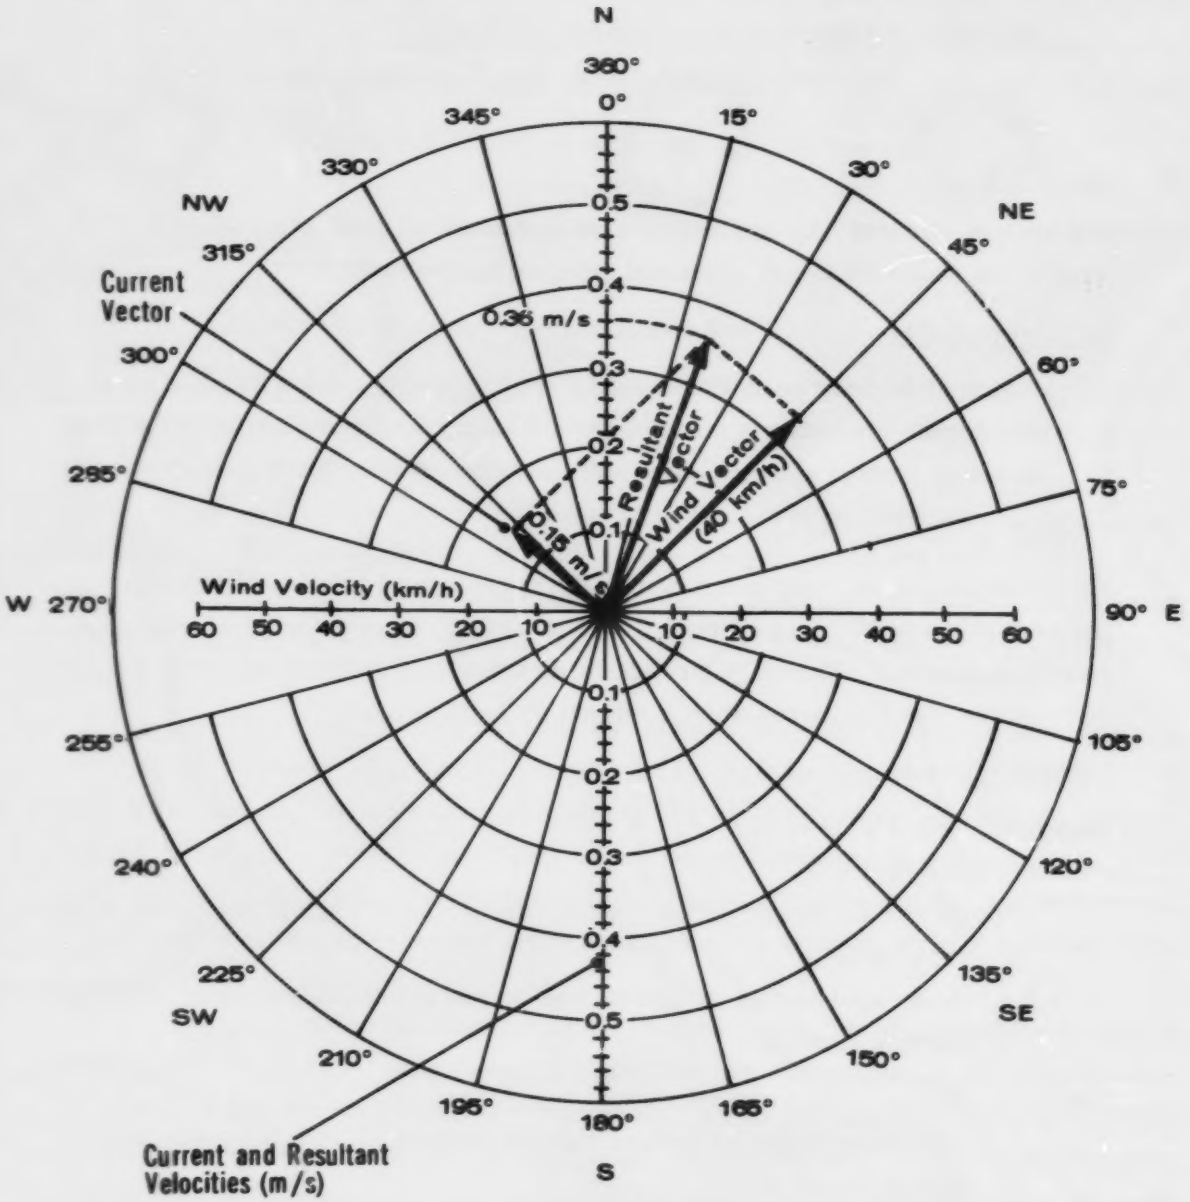

Solution to Problem A

- Use Figure 21
- With t = 20 min and for a spill mass of 20 tonnes, the spill radius (r) is estimated at about 60 m (by interpolation)
- Similarly, the maximum spill radius ($r_{max}$) of about 250 m will occur in approximately 125 min (2 h)

ii) Problem B

The slick in Problem A is confined to a calm channel, approximately 50 m in width. What is the maximum length of channel affected by this spill?

Solution to Problem B

- Figure 21 (or Solution to Problem A) gives $r_{max}$ = 250 m for a 20 tonne spill
- Use Figure 22: with $r_{max}$ = 250 m and a stream width of 50 m, the maximum length of channel affected under still conditions is about 4,000 m (4 km)

iii) Problem C

The 20 tonne spill in Problem A is being affected by a wind velocity of 40 km/h from the southwest and a surface current of 0.15 m/s at 90° from the wind direction (i.e., flow is northwest). What is the resultant direction and speed of the slick and the distance the slick has moved when it reaches its maximum size?

Solution to Problem C

Step 1: Define wind vector

- Use Figure 24
- Determine length of wind vector for 40 km/h against horizontal wind velocity scale
- Draw wind vector at appropriate length and in northeasterly direction starting at origin

Step 2: Define surface current vector

- Determine length of surface current vector of 0.15 m/s against vertical axis on Figure 24
- Draw surface current vector at appropriate length and in northwesterly direction, starting from head of wind vector

Step 3: Define resultant vector

- Draw resultant vector from origin to head of current vector
- Direction of translation as given by resultant vector is about 20° east of North
- Define translation velocity by measuring length of the resultant vector against vertical scale. Spill translation velocity is estimated at 0.36 m/s

Step 4: Determine distance travelled when spill reaches maximum radius

- From Figure 21 (or Problem A), $r_{max}$ = 250 m at t = 125 min (7,500 s)
- Distance travelled = 7,500 s x 0.36 m/s = 2,700 m, by time spill reaches maximum radius

## 5.5 Subsurface Behaviour: Penetration into Soil

**5.5.1 Introduction.** The general principles of contaminant transport in soil and their application to this work are described in the Introduction Manual. Specific items related to toluene are presented here.

When toluene is spilled onto soil, its transport becomes a multi-phase phenomenon. The phases include the liquids and vapours of toluene and water, toluene adsorbed onto soil, and toluene in the aqueous phase. However, the central concern with immiscible liquids is downward transport of the liquid toluene toward the groundwater table.

Unfortunately, sufficient data do not exist to permit a detailed assessment of contaminant transport in a specific circumstance. A few extensive field investigations have been carried out, especially involving spills of oil, gasoline and PCBs. But, for toluene, very limited information exists to enable predictions to be made under a broad range of spill conditions. Consequently, it is necessary to simplify the soil and groundwater conditions and to express contaminant behaviour through analogy to other more extensively studied materials.

A pattern for the downward movement of immiscible fluids such as toluene in soil has been prepared by using models designed for oils and petroleum products (Blokker 1971; Freeze and Cherry 1979). As these behave similarly in soil, the model is felt to be applicable to toluene. It is assumed that when the spill occurs, the soil contains water only up to its field capacity (the maximum amount of water that the soil holds after excess water is drained) and that this condition prevails down to the groundwater table. The spilled toluene fills the pores at the soil surface and begins to penetrate downward. The infiltration rate is governed by the saturated hydraulic conductivity ($K_o$) of toluene in

the soil as described in the Introduction Manual. Surface ponding occurs when the spilling rate exceeds the infiltration rate. It is assumed that the toluene moves downward through the soil as a saturated slug, leaving behind a constant residual amount ($S_o$) of toluene within the soil pores.

Downward transport will continue until the volume of toluene spilled per unit area ($B_o$) equals the amount retained in the soil as $S_o$. Some lateral spreading may occur due to capillary action. If $B_o$ is greater than the volume that can be retained as $S_o$ above the groundwater table, the excess toluene will spread as a pancake within the saturated groundwater capillary fringe. The resultant contaminated zone containing the residual amount of toluene, $S_o$, consists of a "vertical" column and a "horizontal" pancake of soil. This is shown schematically in Figure 25.

**5.5.2 Equations Describing Toluene Movement into Soil.** The equations and assumptions used to describe contaminant movement downward through the unsaturated soil zone toward the groundwater table are described in the Introduction Manual. Transport velocities have been based on Darcy's Law assuming saturated piston flow.

**5.5.3 Saturated Hydraulic Conductivity of Toluene in Soil.** The saturated hydraulic conductivity ($K_o$) in m/s is given by:

$$K_o = \frac{(\rho g)k}{\mu}$$

where:
- $k$ = intrinsic permeability of the soil ($m^2$)
- $\rho$ = mass density of the fluid ($kg/m^3$)
- $\mu$ = absolute viscosity of the fluid (Pa•s)
- $g$ = acceleration due to gravity = 9.81 $m/s^2$

| | Toluene | |
|---|---|---|
| Property | 20°C | 4°C |
| Mass density ($\rho$), $kg/m^3$ | 866 | 881 |
| Absolute viscosity ($\mu$), Pa•s | $0.59 \times 10^{-3}$ | $0.75 \times 10^{-3}$ |
| Saturated hydraulic conductivity ($K_o$), m/s | $(1.44 \times 10^7)k$ | $(1.15 \times 10^7)k$ |

**5.5.4 Soils.** The Introduction Manual describes the three soils selected for this work. Their relevant properties are:

FIGURE 25

TOLUENE

## SCHEMATIC SOIL TRANSPORT

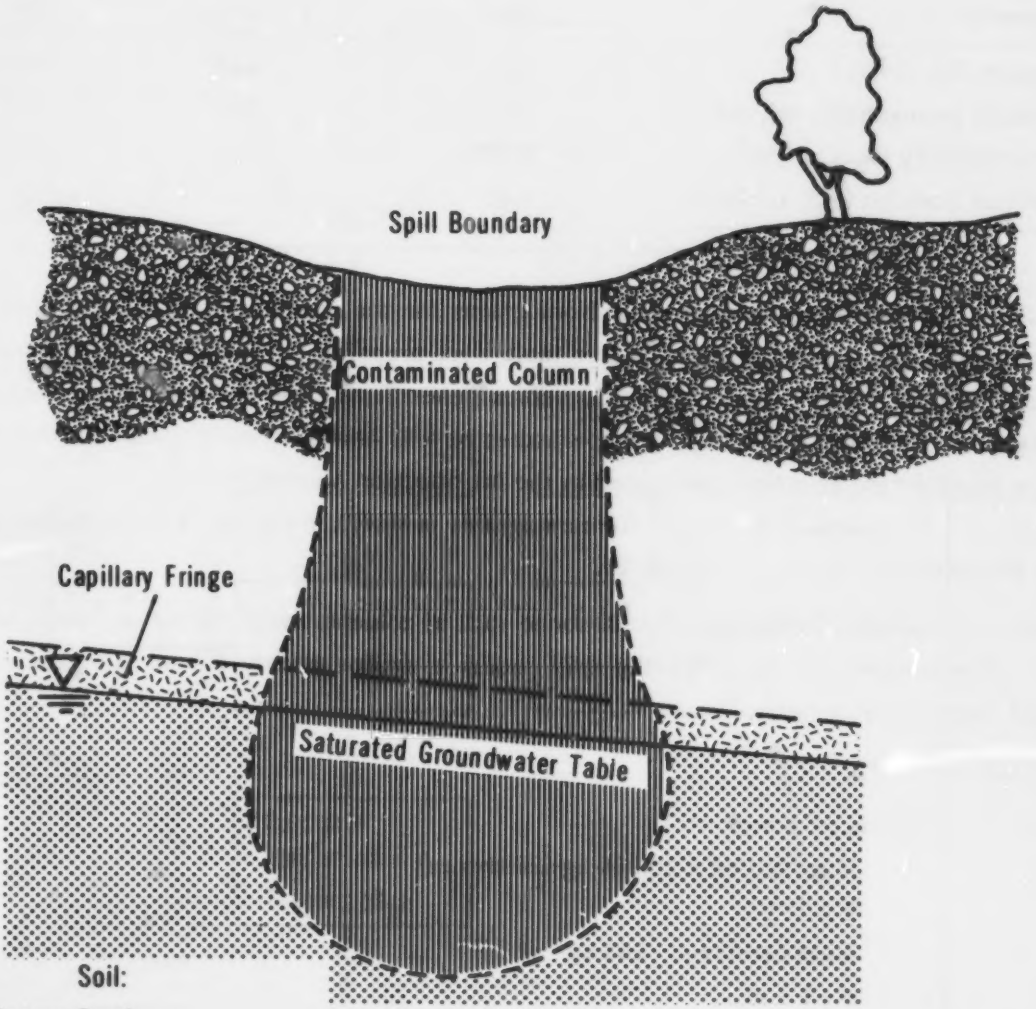


- Coarse Sand
- Porosity (n) = 0.35
- Intrinsic Permeability (k) = $10^{-9} m^2$
- Field Capacity ($\theta_{fc}$) = 0.075

| Property | Soil Type | | |
|---|---|---|---|
| | Coarse Sand | Silty Sand | Clay Till |
| Porosity (n), $m^3/m^3$ | 0.35 | 0.45 | 0.55 |
| Intrinsic permeability (k), $m^2$ | $10^{-9}$ | $10^{-12}$ | $10^{-15}$ |
| Field capacity ($\theta_{fc}$), $m^3/m^3$ | 0.075 | 0.3 | 0.45 |
| Residual fraction ($S_o$), $m^3/m^3$ | 0.05 | 0.1 | 0.2 |

**5.5.5 Penetration Nomograms.** Nomograms for the penetration of toluene into the unsaturated zone above the groundwater table were prepared for each soil. They show the total depth of toluene penetration (B) versus penetration time ($t_p$) for various volumes spilled per unit area of soil ($B_o$). Temperatures of 4°C and 20°C were used. Calculations were based on the equations developed in the Introduction Manual.

A flowchart for use of the nomograms is shown in Figure 26. The nomograms are presented in Figures 27, 28 and 29.

**5.5.6 Sample Calculation.** A 20 tonne spill of toluene has occurred on coarse sandy soil. The temperature is 20°C; the spill radius is approximately 8.6 m. Calculate the depth and time of penetration.

Solution

Step 1: Define parameters

- Mass spilled = 20,000 kg (20 tonnes)
- T = 20°C
- Mass density $\rho = 866\ kg/m^3$
- r = 8.6 m

Step 2: Calculate volume and area of spill

- $V = \frac{M}{\rho} = \frac{2 \times 10^4\ kg}{866\ kg/m^3} = 23.1\ m^3$
- $A = \pi r^2 = 232\ m^2$

FIGURE 26

TOLUENE

## FLOWCHART FOR NOMOGRAM USE

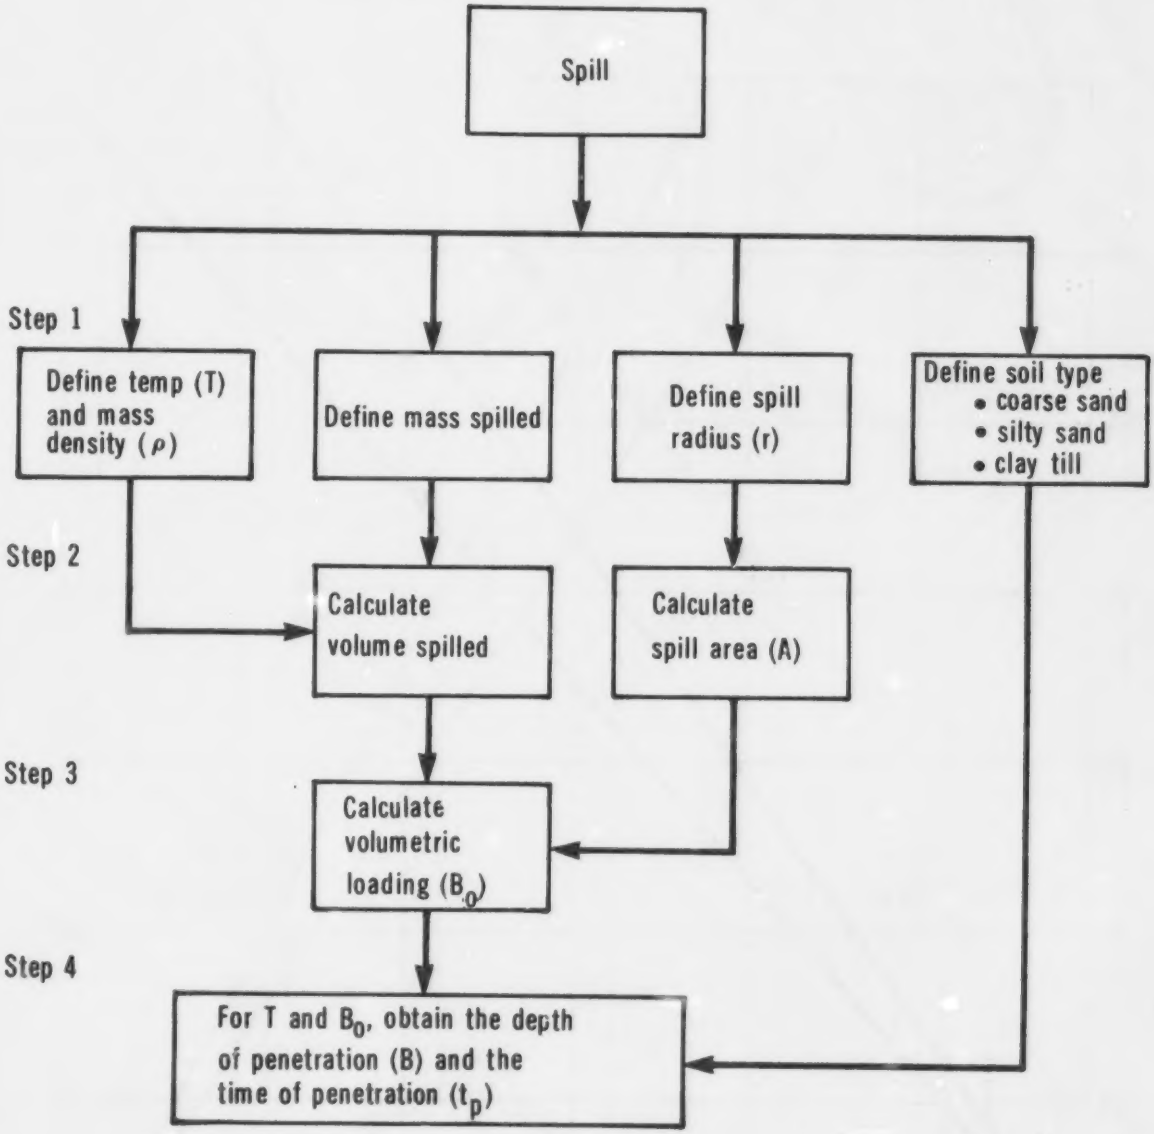

FIGURE 27

TOLUENE

## PENETRATION IN COARSE SAND

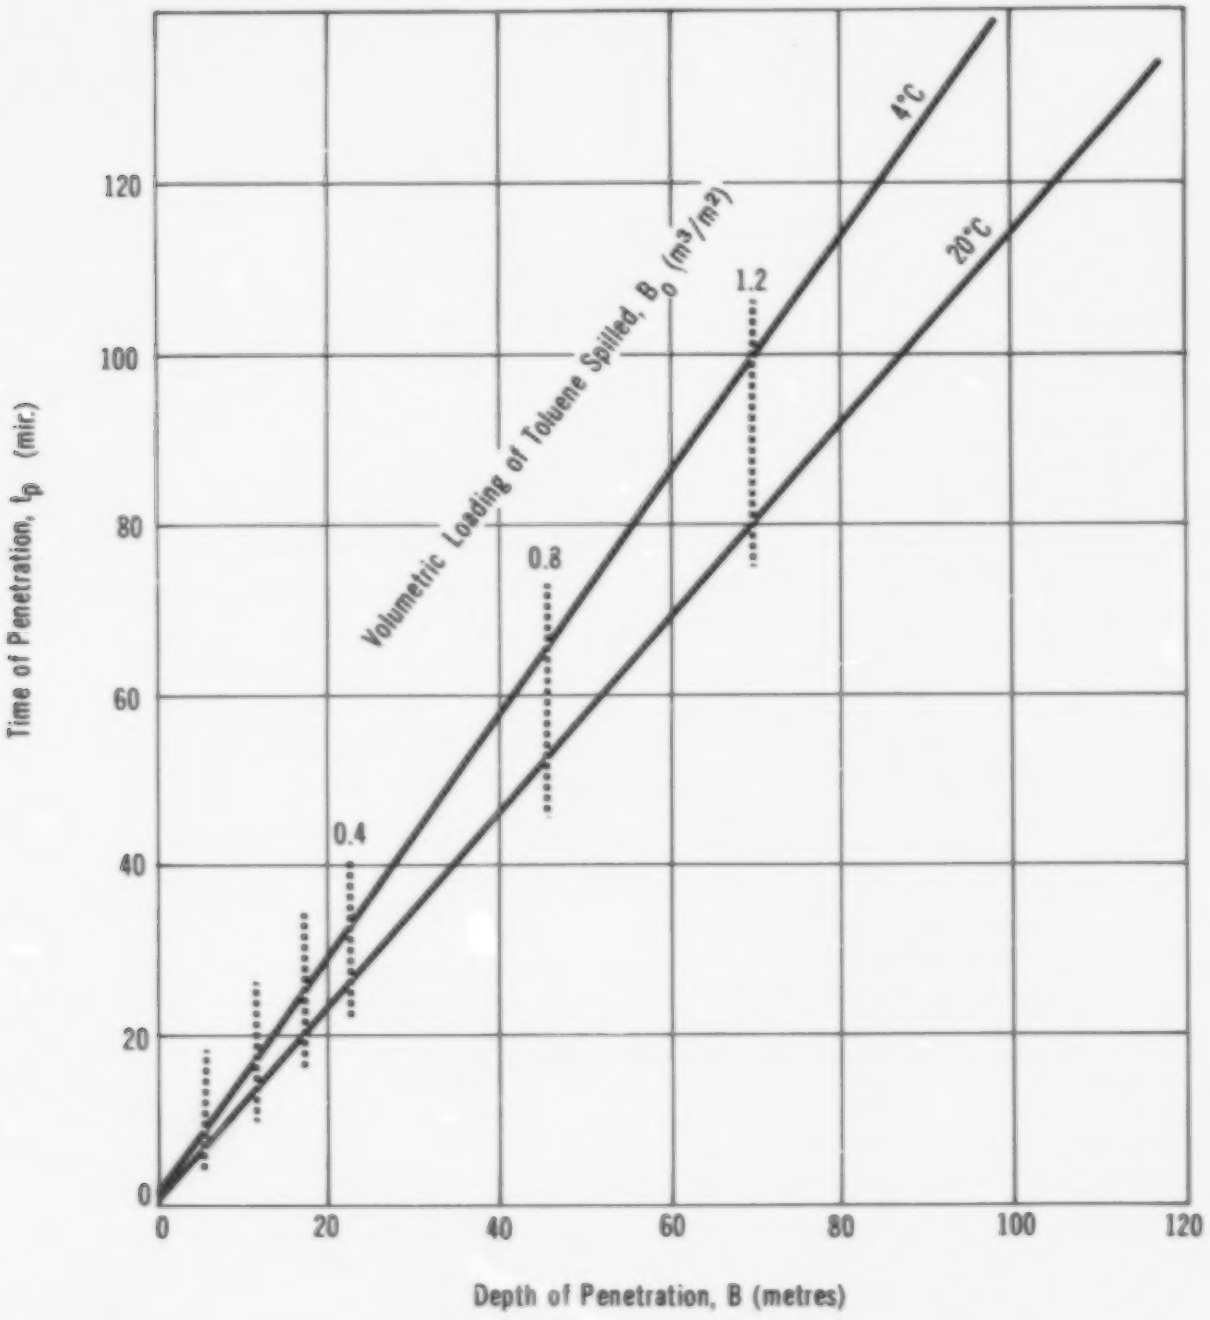

FIGURE 28

TOLUENE

## PENETRATION IN SILTY SAND

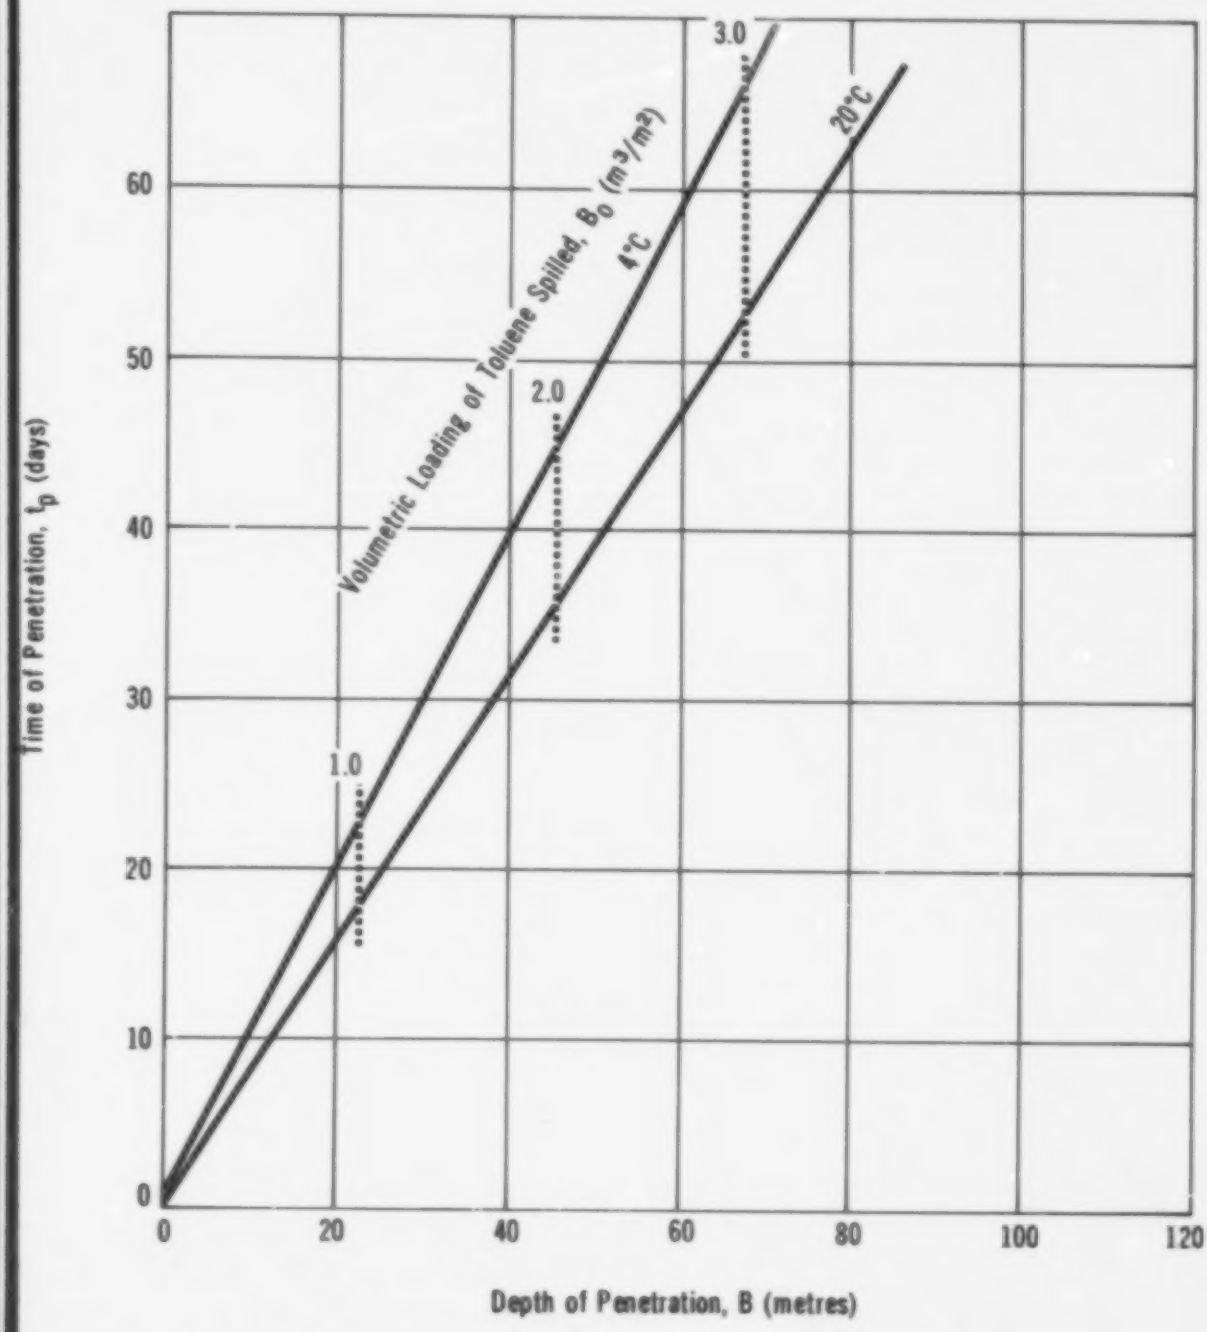

FIGURE 29

TOLUENE

## PENETRATION IN CLAY TILL

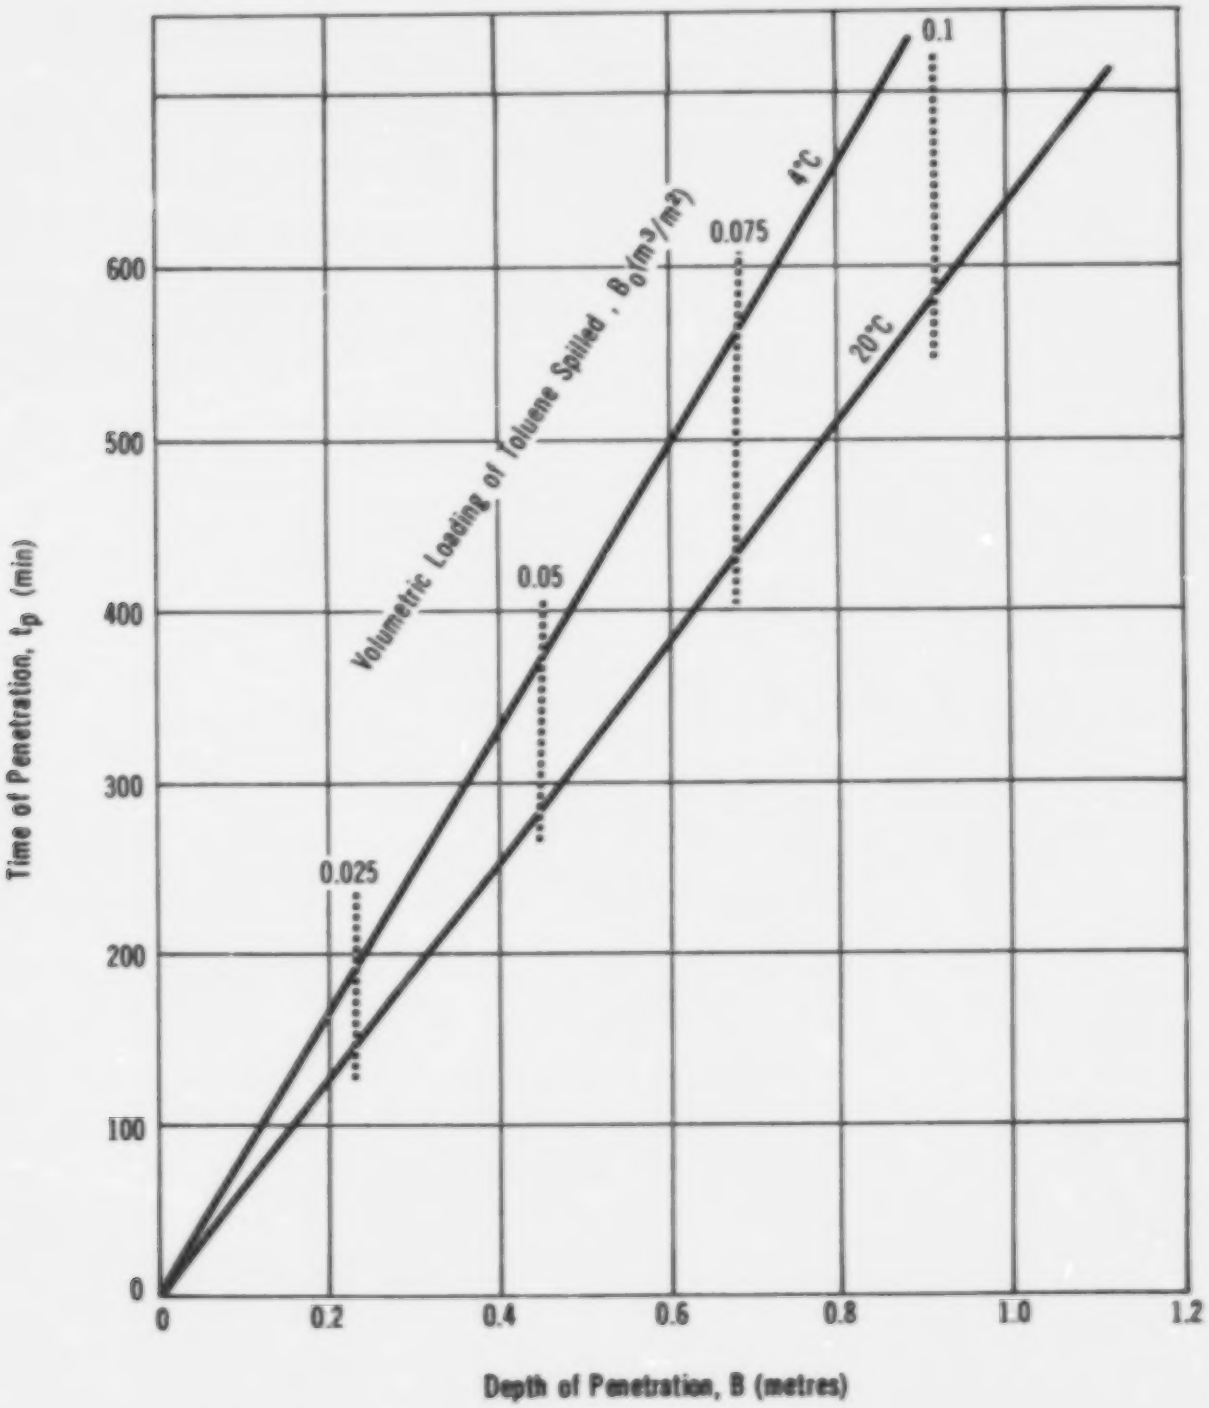

Step 3: Calculate volumetric loading $B_o$

- $B_o = \frac{V}{A} = \frac{23.1}{232} = 0.1\ m^3/m^2$

Step 4: Estimate depth of penetration (B) and time of penetration ($t_p$) using Figure 27

- For coarse sand, $B_o = 0.1\ m^3/m^2$
- $B = 6$ m, $t_p = 7$ min

# 6 ENVIRONMENTAL DATA

## 6.1 Suggested or Regulated Limits

**6.1.1 Water.** There are no federal or provincial guidelines for toluene concentrations in water (PTP 1980). Less than 0.25 mg/kg of toluene is sufficient to taint the flavour of fish flesh (EPA 440/9-75-009).

**6.1.2 Air.** In Ontario, the environmental limit for toluene emissions (half-hour average) is 2,000 $\mu g/m^3$ (Ontario E.P. Act 1971). There are no specific standards in the U.S. for general atmospheric pollution by toluene (PTP 1980).

## 6.2 Aquatic Toxicity

**6.2.1 Canada.** Toxicity range for short-term exposure for fish is 10 to 65 mg/L; for lower water organisms, the limit is 60 mg/L (MHSSW 1976). A concentration of 0.25 mg toluene in a litre of water can cause tainting of fish and other aquatic organisms (WQC 1972). The 96-h $LC_{50}$ (concentration for 50 percent mortality) for fish is less than 10 mg/L (Water Management Goals 1978).

**6.2.2 Other Countries.** The maximum allowable concentration (MAC) of toluene in surface waters of Classes I to III is 0.1 mg/L in Romania (1974) (Verschueren 1977).

**6.2.2.1 United States.** Toluene has been assigned a TLm 96 (4-day median lethal toxicity rating) of 10 to 100 mg/L (RTECS 1979). The criterion to protect freshwater aquatic life is 2.3 mg/L as a 24-hour average and the concentration should not exceed 5.2 mg/L at any time (PTP 1980). The criterion to protect saltwater aquatic life is 0.1 mg/L at a 24-hour average, and the concentration should not exceed 2.3 mg/L at any time (PTP 1980).

**6.2.3 Measured Toxicities.**

**6.2.3.1 Freshwater toxicity.**

| Conc. (mg/L) | Time (hours) | Species | Result | Water Conditions | Reference |
|---|---|---|---|---|---|
| Fish Kill Data | | | | | |
| 10 | not stated | Rainbow trout | lethal dose | | MHSSW 1976 |

| Conc. (mg/L) | Time (hours) | Species | Result | Water Conditions | Reference |
|---|---|---|---|---|---|
| Fish Toxicity Tests | | | | | |
| 9.36 µL/L | 96 | Coho salmon fry | $LC_{50}$; slow growth rate | | Spehar 1981 |
| 240 | 96 | Channel catfish | $LC_{50}$ | 22°C | Johnson 1980 |
| 170 | 96 | Bluegill | $LC_{50}$; metabolize toluene | 17°C | Johnson 1980; Berry 1980 |
| 70 | not stated | Dace | $LC_{50}$ | | Juhnke 1978 |
| 58 | 24 | Goldfish | $LD_{50}$ | | Verschueren 1977 |
| 56 to 34 | 24 to 96 | Fathead minnow | TLm | | Verschueren 1977 |
| 10 | not stated | Rainbow trout | lethal dose | | MHSSW 1976 |
| 1,340 to 1,280 | 24 to 96 | Mosquito fish | TLm | turbid, farm pond | WQCDB-3 1971 |
| 61 to 65 | 1 | Sunfish | TLm, lethal | tar and gas waste | WQCDB-1 1970 |
| 24 | 96 | Bluegill | TLm | temp. constant; soft | Pickering 1966 |
| 63 to 59 | 24 to 96 | Guppies | TLm | soft | Pickering 1966 |

| Conc. (mg/L) | Time (hours) | Species | Result | Reference |
|---|---|---|---|---|
| Microorganisms | | | | |
| 313 | 48 | *Daphnia magna* | $LC_{50}$ | NRC 1981 |
| 105 | not stated | Algae (*Microcystis aerugi-nosa*) | inhibition of cell multiplication | Verschueren 1977 |
| 120 | not stated | Algae (*Scene-desmus*) | danger thresholds | MHSSW 1976 |

| Conc. (mg/L) | Time (hours) | Species | Result | Water Conditions | Reference |
|---|---|---|---|---|---|
| Invertebrates | | | | | |
| 24.2 to 72.4 | 24 | Copepod | $LC_{50}$ | | NRC 1981 |
| not stated | 48 | Crayfish | lack of ability to metabolize toluene | | Berry 1980 |
| 33 | 24 | Brine shrimp | TLm | static bioassay | Haque 1974 |

**6.2.3.2 Saltwater toxicity.**

| Conc. (mg/L) | Time (hours) | Species | Result | Water Conditions | Reference |
|---|---|---|---|---|---|
| 7.3 | 96 | Striped bass | $LC_{50}$ | | NRC 1981 |
| 277 to 485 | 96 | Sheepshead minnow | $LC_{50}$ | | NRC 1981 |
| 0.1 | 24 | Pacific herring | absorbed rapidly; tissues contained conc. 340 times greater than measured | | NRC 1981 |
| 50 (in crude oil suspension) | 10 days | Eels | accumulated in flesh; conc. ratios of 13.2 | | NRC 1981 |
| 54 | 96 | Japanese medaka (eggs) | $TL_{50}$; 41 mg/L produced teratogenic effects | static bioassays | Stoss 1979 |
| 10 | 24 to 96 | Young coho salmon | no significant mortality | artificial seawater, 8°C | Verschueren 1977 |
| 50 | 24 | Young coho salmon | 90% mortality | artificial seawater, 8°C | Verschueren 1977 |

| Conc. (mg/L) | Time (hours) | Species | Result | Water Conditions | Reference |
|---|---|---|---|---|---|
| Invertebrates | | | | | |
| 12.5 | 69 | Marine isopod | $ET_{50}$; narcoticization is reversible | | Bakke 1979 |
| 1.0 | not stated | Mussel | no lethal effect | | APOP 1975 |
| 23 | not stated | Brine shrimp | TLm | | EPA 440/9-75-009 |

| Conc. (mg/L) | Species | Result | Reference |
|---|---|---|---|
| Plants | | | |
| >100 | Phytoplankton | toxic; growth inhibited | NRC 1981 |
| 10 | Giant kelp | reduced photosynthetis | WQC 1963 |
| Microorganisms | | | |
| 1,000 | Pseudomonads (marine bacteria) | sublethal; negative chemotactic response | NRC 1981 |
| 6,000 | Pseudomonads (marine bacteria) | all chemotactic response inhibited | NRC 1981 |

**6.2.4 Aquatic Studies.** Toluene can be toxic to fish and fish food organisms (EPA 440/9-75-009). Concentrations of toluene which cause acute poisoning in fish are dependent on temperature and fish species. The range is between 10 and 90 mg/L (MHSSW 1976). Freshwater algae are more resistant to toluene than are fish (PTP 1980). Marine studies indicate that toluene is toxic to marine bacteria, phytoplankton and marine fish (PTP 1980).

**6.3 Toxicity to Other Biota**

**6.3.1 Livestock.**

| Conc. | Time | Species | Result | Reference |
|---|---|---|---|---|
| >0.0078 g/egg | 2, 3 & 6 days | Chick embryos | $LD_{50}$; death after 14-day incubation | Elovaara 1979 |

| Conc. | Time | Species | Result | Reference |
|---|---|---|---|---|
| 5,000 mg/kg (b.w.) | not stated | Mammals | ave. $LD_{50}$ (oral) | MHSSW 1976 |

The reported maximum concentration of toluene found in freshwater that produces no effect in mammals when administered on a chronic basis is 0.5 to 1.0 mg/L (WQCDB-3 1971).

6.3.2 **Avian.** A toluene slick on water is harmful to waterfowl as it destroys the insulation offered by the feathers by removing the waxes and other substances which waterproof and trap air in feathers (OHM-TADS 1981).

6.3.3 **Insects and Vertebrates.**

| Conc. (mg/L) | Species | Result | Reference |
|---|---|---|---|
| 10 to 15 | Houseflies | lethal | NRC 1981 |
| 22 | Mosquito larvae (4th. instar) | $LD_{50}$ | NRC 1981 |
| 96 | Grain weevils | $LD_{50}$ | NRC 1981 |
| in pure toluene (30 min) | Grasshopper egg | prevent or terminate diapause | NRC 1981 |
| 920 mg/kg | Frogs | $LC_{LO}$ (subcutaneous) | RTECS 1979 |

6.3.4 **Plants.**

| Conc. ($mg/m^3$) | Species | Result | Reference |
|---|---|---|---|
| 45.5 | Barley plants | injury to plant | NRC 1981 |
| not stated | Avocado fruit | vapour absorbed and metabolized | NRC 1981 |
| not stated | Corn and bean seedlings; tea and grape plants | vapour absorbed and metabolized in roots, leaves and stems | NRC 1981 |

All cotton varieties tested were sensitive to toluene during germination, but differed with regard to their degree of sensitivity. Growth inhibition of seedlings increased with increasing toluene rate (2.5 to 10 kg/ha) (Kamilova 1979). Tomato plants have been found to be particularly sensitive to toluene vapours. Most observed plant injuries in response to toluene are acute rather than chronic. It enters the plant readily, through the stomata and cuticle, and quickly kills the tissues with which it comes into contact. Toluene is neither accumulated nor translocated in the plant (NRC 1981).

## 6.4 Degradation

**6.4.1 Biological Degradation.** Toluene is degraded by various bacteria (Brown 1978). Low levels of toluene (20 mg/L) appear to increase the growth rate of bacteria in sewage sludge deposits (measured by rate of methane evolution); a toxic effect is observed at higher concentrations (200 mg/L) (NRC 1981).

| Conc. (mg/L) | Species | Result | Reference |
|---|---|---|---|
| 200 | Bacteria (*E. coli*) | lethal dose; inhibition of degradation | Verschueren 1977 |
| 30 | Bacteria (*P. fluorescens*) | inhibition of degradation of glucose | Verschueren 1977 |

**6.4.2 B.O.D.**

| B.O.D. (kg/kg) | % Theo. | Days | Seed | Reference |
|---|---|---|---|---|
| 1.23 | | 5 | dilute sewage; acclimated | Jones 1971 |
| 1.47 | | 35 | not specified | Verschueren 1977 |
| >1 | 53 | 5 | sewage | Price 1974 |
| >1 | 86 | 20 | acclimated sewage | Price 1974 |
| <1 | 3 | 15 | sewage; saltwater | Price 1974 |

The half-life of a saturated solution is expected to be less than 30.6 minutes as a result of evaporation (MacKay and Wolkoff 1973).

**6.4.3 C.O.D.** The Chemical Oxygen Demand (C.O.D.) for toluene has been found to be 1.88 kg/kg (Jones 1971). Theoretical Oxygen Demand (Th.O.D.) is 3.13 kg/kg (Verschueren 1977). Toluene's ability to inhibit sewage cultures and its low solubility result in very little development of oxygen deficiency in a spill situation (EPA 440/9-75-009).

## 6.5 Long-term Fate and Effects

Toluene has been shown to be readily transferred from water surfaces to the atmosphere under ideal conditions. In the atmosphere, it is subject to photochemical degradation to various organics. Toluene is also known to re-enter the hydrosphere in rain (PTP 1980). Toluene can reside in the atmosphere for hours or days (NRC 1981).

The biological effects of toluene are likely to be short-lived in living organisms in the environment. Because toluene is not stored in animal tissues and is rapidly metabolized and excreted, chronic toxic effects are unlikely to occur (NRC 1981).

## 6.6 Soil

**6.6.1 Soil Degradation of Material.** Toluene in low concentrations may be degraded by soil microbes within a short period of time depending on soil types and other environmental factors. In high concentrations, it is toxic to microorganisms and thus is not degraded significantly (NRC 1981).

## 6.7 Other Effects

**6.7.1 Possible Effects on Water Treatment Processes.** Sewage sludge digestion is inhibited by a concentration greater than 0.05 percent (EPA 440/9-75-009).

# 7 HUMAN HEALTH

There is a considerable amount of information in the literature concerning the toxicological effects of toluene to test animals and humans. Current occupational standards for toluene are based chiefly on subjective and objective signs of mucous membrane irritation and deficits in central nervous system function upon acute inhalation exposure. There is a limited amount of literature available to date on the effects of toluene exposure on reproduction, mutagenicity and carcinogenicity.

Numerous research reports on the toxicology of toluene have been recently reported in TOX TIPS (a summary of current research activity), including several long-term mortality studies of occupational exposures, a neurotoxicity study and a carcinogenesis bioassay at the U.S. National Cancer Institute. Toluene has been reported in the EPA TSCA Inventory. The data summarized here are representative of information in the literature.

The toxicological data summarized here have been extracted from reliable standard reference sources and are representative of information in the literature. It should be noted that some of the data are for chronic (long-term), low-level exposures and may not be directly applicable to spill situations.

## 7.1 Recommended Exposure Limits

The exposure standards for toluene are based upon a potential contribution to overall exposure via skin absorption and its central nervous system effects. Canadian provincial standards are generally similar to those of the USA-ACGIH unless indicated otherwise.

| Guideline (Time) | Origin | Recomended Level | Reference |
|---|---|---|---|
| Time-weighted Averages (TWA) | | | |
| TLV* (8 h) | USA-ACGIH | 100 ppm (375 mg/m$^3$) | TLV 1983 |
| PEL (8 h) | USA-NIOSH | 100 ppm (375 mg/m$^3$) | NIOSH/OSHA 1981 |
| TWA (8 h) | USA-OSHA | 200 ppm (750 mg/m$^3$) | NIOSH/OSHA 1981 |
| Action Level** | USA-NIOSH/OSHA | 50 ppm (163 mg/m$^3$) | GE 1979 |
| | Sweden | 375 mg/m$^3$ | Verschueren 1977 |

| Guideline (Time) | Origin | Recomended Level | Reference |
|---|---|---|---|
| | Poland | 30 ppm (100 mg/m$^3$) | ILO 1980 |
| | USSR | 15 ppm (50 mg/m$^3$) | ILO 1980 |
| | East Germany | 60 ppm (200 mg/m$^3$) | ILO 1980 |
| | Finland | 200 ppm (750 mg/m$^3$) | ILO 1980 |
| Short-term Exposure Limits (STEL) | | | |
| STEL (15 min) | USA-ACGIH | 150 ppm (560 mg/m$^3$) | TLV 1983 |
| Ceiling (10 min) | USA-NIOSH | 200 ppm (750 mg/m$^3$) | NIOSH/OSHA 1981 |
| Ceiling, Maximum (10 min) | USA-OSHA | 500 ppm (1,875 mg/m$^3$) | NIOSH/OSHA 1981 |
| STIL* (30 min) | | 600 ppm | CHRIS 1978 |
| Ceiling, Acceptable (15 min) | USA-OSHA | 300 ppm (1,125 mg/m$^3$) | NIOSH/OSHA 1981 |
| Other Human Toxicities | | | |
| IDLH | USA-NIOSH | 2,000 ppm (7,500 mg/m$^3$) | NIOSH Guide 1978 |
| $TC_{LO}$ | | 500 ppm | AAR 1981 |
| $TC_{LO}$ | | 200 ppm | RTECS 1979 |
| $TC_{LO}$ | | 100 ppm | RTECS 1979 |

* STIL - Short-term Inhalation Limit
** Recommended only

Inhalation Toxicity Index

The Inhalation Toxicity Index (ITI) is a measure of the potential of a substance to cause injury by inhalation. It is calculated as follows:

ITI = 1,315.12 (Vapour pressure in mm Hg)/(TLV• in ppm)

ITI = 1,315.12 x 27.8 mm Hg (25°C)/100 ppm = 365.6

At 25°C, ITI = $3.65 \times 10^2$

## 7.2 Irritation Data

### 7.2.1 Skin Contact.

| Exposure Level (and Duration) | Effects | Reference |
|---|---|---|
| SPECIES: Human | | |
| 200 to 100 ppm | Itching skin | GE 1979 |
| SPECIES: Rabbit | | |
| 14 g/kg | $LD_{50}$ | RTECS 1979 |
| 435 mg (72 h patch test) | Erythema, slight edema | RTECS 1979 |

### 7.2.2 Eye Contact.

| Exposure Level (and Duration) | Effects | Reference |
|---|---|---|
| SPECIES: Human | | |
| 300 ppm | Irritation | RTECS 1979 |
| 200 ppm | Irritation | GE 1979 |
| SPECIES: Rabbit | | |
| 2 mg (24 h) | Severe irritation | RTECS 1979 |
| 870 µg (72 h) | Mild irritation | RTECS 1979 |

## 7.3 Threshold Perception Properties

### 7.3.1 Odour.

Odour Characteristics: Pungent, aromatic; benzene-like; like model glue (AAR 1981).

Odour Index: 16,609 (AAR 1981)

| Parameter | Media | Concentration | Reference |
|---|---|---|---|
| Absolute Odour Threshold | - | 0.17 ppm | AAR 1981 |
| Odour Threshold | - | 10 to 15 ppm | NIOSH/OSHA 1981 |
| 50% Recognition | - | 1.74 ppm | Verschueren 1977 |
| 100% Recognition | | 1.75 ppm | Verschueren 1977 |

| Parameter | Media | Concentration | Reference |
|---|---|---|---|
| Odour Threshold | In air | 4.68 ppm | ASTM 1980 |
| Odour Threshold | In air | 2.14 ppm | ASTM 1980 |
| Odour Threshold | In air | 4.78 ppm | ASTM 1980 |
| Threshold Odour Concentration | In air | 0.17 to 40 ppm | ASTM 1980 |

**7.3.2 Taste.**

| Parameter | Media | Concentration | Reference |
|---|---|---|---|
| Lower Taste Threshold | - | <0.25 ppm | AAR 1981 |

**7.4 Long-term Studies**

**7.4.1 Inhalation.**

| Exposure Level (and Duration) | Effects | Reference |
|---|---|---|
| SPECIES: Human | | |
| 30,000 ppm to 10,000 ppm (time not specified) | Dizziness, collapse, loss of consciousness. Rapid recovery, no residual after-effects | Wilson 1943. IN NRC 1981 |
| 2,050 ppm (estimated) | Four adolescents found dead in automobile. Death appears to have been due to fatal anesthetic effect | NRC 1981 |
| 1,000 ppm | Severe toxic effects | AAR 1981 |
| 800 ppm | Metallic taste, headache, lassitude, slight nausea | Carpenter et al. IN NIOSH 1977 |
| 600 ppm | Lassitude, hilarity, slight nausea | Carpenter et al. IN NIOSH 1977 |
| 400 ppm | Mild eye irritation, lacrimation, hilarity | Carpenter et al. IN NIOSH 1977 |
| 200 ppm | $TC_{LO}$, central nervous system effects | GE 1979 |
| 200 ppm (3 to 7 h) | Increased reaction time, decreased systolic blood pressure and heart rate | Ogata et al. 1970. IN NRC 1981 |
| 100 ppm | Psychological effects, transient irritation | Patty 1981 |

| Exposure Level (and Duration) | Effects | Reference |
|---|---|---|
| SPECIES: Monkey | | |
| 100 ppm | $TC_{LO}$. Psychotropic effects | ITII 1981 |
| SPECIES: Dog | | |
| 760 ppm (6 h) | No signs of discomfort | Patty 1981 |
| SPECIES: Cat | | |
| 7,800 ppm (6 h) | CNS effect, mydriasis, mild tremors. Prostration in 80 minutes. Light anesthesia in 2 hours | Patty 1981 |
| SPECIES: Rat | | |
| 70,000 to 45,000 ppm (16.1 min) | Excitation, tremors, running movements | Patty 1981 |
| 70,000 to 45,000 ppm (14.8 min) | Loss of blinking reflex | Patty 1981 |
| 70,000 to 45,000 ppm (9.5 min) | Pupillary contraction | Patty 1981 |
| 70,000 to 45,000 ppm (2.9 min) | Light anesthesia, relaxed | Patty 1981 |
| 25,000 to 15,000 ppm (80 to 130 min) | Lethal to 7 of 10 rats with $O_2$ supplied | Patty 1981 |
| 20,000 ppm (30 to 50 min) | Lethal | NRC 1981 |
| 25,000 to 15,000 ppm (15 to 35 min) | Lethal to 4 of 5 rats | Patty 1981 |
| 8,000 ppm (4 h) | $LC_{50}$ | Patty 1981 |
| 4,000 ppm (4 h) | $LC_{LO}$ | ITII 1981 |
| 4,000 ppm (4 h) | Narcosis or depression, inability to walk, myoclonic seizures | Takeuchi 1977. IN NRC 1981 |
| 2,000 ppm (4 h) | Occasional myoclonic seizures | Takeuchi 1977. IN NRC 1981 |
| 1,700 ppm (4 h) | Dose was tolerated | Patty 1981 |
| SPECIES: Mouse | | |
| 9,300 to 8,000 ppm | Lethal to all test animals | Patty 1981 |

| Exposure Level (and Duration) | Effects | Reference |
|---|---|---|
| 8,520 ppm | Lethal to 87.5% of test animals | Patty 1981 |
| 5,320 ppm (8 h) | $LC_{50}$ | RTECS 1979 |
| 5,300 ppm (8 h) | Minimum lethal concentration | Svirbely et al. IN NIOSH 1977 |
| 5,300 ppm | $LC_{50}$ | NRC 1981 |
| 3,200 to 2,650 ppm | Loss of reflexes | Patty 1981 |
| Concentration not specified | Pulmonary irritation, renal irritation, evidence of cellular damage to the spleen | Svirbely et al. IN NIOSH 1977 |
| Concentration not specified | Cardiotoxicity | Taylor and Harris 1970. IN NIOSH 1977 |
| Chronic Exposures | | |
| SPECIES: Human | | |
| 1,500 to 500 ppm (6 h to 8 h/d for 1 to 3 wk) | Headache, nausea, dizziness, anorexia, palpitation and extreme weakness. Definite impairment of reaction time and pronounced loss of coordination | Wilson 1943. IN NIOSH 1977 |
| 1,100 to 100 ppm (2 wk to 5 yr) | Hepatomegaly, mild intoxication, enlarged livers, macrocytosis, mild depression of erythrocyte level, absolute lymphocytosis | Greenberg et al. 1942. IN NRC 1981 |
| 1,100 to 100 ppm (2 wk to 5 yr) | Elevation of hemoglobin level and mean corpuscular hemoglobin concentration | Greenberg et al. 1942. IN NIOSH 1977 |
| 800 ppm (8 h/d, 2 d/wk for 3 mo) | Severe fatigue, nausea, mental confusion, staggering gait, lack of self control. Insomnia lasting several days after exposure | Von Oettingen et al. 1942. IN NRC 1981 |
| 600 ppm (8 h/d, 2 d/wk for 3 mo) | Extreme fatigue, mental confusion, exhilaration, nausea, severe headache, and dizziness after 3 h exposure. After-effects included nervousness and some confusion | Von Oettingen et al. 1942. IN NIOSH 1977 |
| 400 ppm (8 h/d, 2 d/wk, for 3 mo) | Fatigue, mental confusion, headache, skin paresthesia, weakness, | Von Oettingen et al. 1942. IN NIOSH 1977 |

| Exposure Level (and Duration) | Effects | Reference |
|---|---|---|
| | dilated pupils. After-effects: fatigue, headache, skin paresthesia, insomnia | |
| 300 ppm (8 h/d, 2 d/wk for 3 mo) | Severe fatigue, headache, muscular weakness, incoordination, slight pallor. After-effects: fatigue, headache, skin paresthesia, insomnia | Von Oettingen et al. 1942. IN NIOSH 1977 |
| 300 to 200 ppm (>10 yr) | No signs of health impairment including toxic effects on the liver, deviations in neurological examinations, and physical disturbances | Toxline (on-line) 1981 |
| 200 ppm (8 h/d, 2 d/wk for 3 mo) | Paresthesia of the skin, confusion, muscular weakness, impaired coordination, headache, nausea and dilation of pupils | Von Oettingen et al. 1942. IN NRC 1981 |
| 200 ppm (15 yr) | No significant increase in the number of chromosome aberrations | Forni et al. 1971. IN NRC 1981 |
| 125 ppm (several yr) | No changes in liver function | Capellini 1971. IN NRC 1981 |
| 100 ppm (8 h/d, 2 d/wk, for 3 mo) | No definite effects | Von Oettingen et al. 1942. IN NRC 1981 |
| 1.5 mg/m$^3$ (chronic exposure) | No clinical symptoms of intoxication. Structural and functional disturbances in erythrocyte membranes including charges in the phospholipid component of membranes, decreased binding strength of membrane components, macrocytosis, increased osmotic resistance, and shortening of erythrocyte life | Toxline (on-line) 1981 |
| SPECIES: Dog | | |
| 2,000 ppm (8 h/d) 6 d/wk for 4 mo) Followed by 2,660 ppm (8 h/d, 6 d/wk for 2 mo) | During the last 2 months of exposure: CNS intoxication, incoordination and paralysis of the hind legs. No hematological abnormalities were found | Fabre et al. 1955. IN NIOSH 1977 |

| Exposure Level (and Duration) | Effects | Reference |
|---|---|---|
| SPECIES: Guinea Pig | | |
| 1,250 ppm (4 h/d for 18 d) | Narcosis | Smyth 1928. IN NRC 1981 |
| 1,000 ppm (4 h/d for more than 18 d) | No apparent harmful effects | Smyth 1928. IN NRC 1981 |
| SPECIES: Rat | | |
| 2,000 ppm (8 h/d for 32 wk) | No significant changes were found in body weight, leukocyte count, erythrocyte count, eosinophil count, or hemoglobin levels | Takeuchi 1969. IN NIOSH 1977 |
| 1,000 ppm (6 h/d, 5 d/wk for 13 wk) | No deleterious effects | Rhudy 1978. IN NRC 1981 |
| 610 mg/m$^3$ (4 h/d for 4 mo) | Chromosome aberrations persisting for at least 1 month after termination of exposure. Leukosis | Dobrokhotov 1977. IN NRC 1981 |
| SPECIES: Mouse | | |
| 1,000, 100, 10 and 1 ppm (6 h/d for 20 d) | Depression of spontaneous locomotor activity | Horiguch et al. 1977. IN NRC 1981 |
| 500 mg/m$^3$ (24 h/d for 7 d, day 6 to day 13 of pregnancy) | Increased skeletal abnormalities. "Teratogenicity not proven" | Hudak and Unguary 1978. IN NRC 1981 |

7.4.2 Ingestion.

| Exposure Level (and Duration) | Effects | Reference |
|---|---|---|
| Acute Exposures | | |
| SPECIES: Human | No data | |

| Exposure Level (and Duration) | Effects | Reference |
|---|---|---|
| SPECIES: Rat | | |
| 7,000 mg/kg | $LD_{50}$ | Patty 1981 |
| 5,000 mg/kg | $LD_{50}$ | GE 1979 |
| 3,000 mg/kg | $LD_{50}$ | ITII 1981 |
| 2,500 mg/kg | LD (30% of test animals) | Patty 1981 |
| 6.4 mL/kg | $LD_{50}$ (young adult) | Patty 1981 |
| 3.0 mL/kg | $LD_{50}$ (14-day-old animals) | Patty 1981 |
| 7 g/kg | $LD_{50}$ (young adults) | Wolfe et al. 1956. IN NRC 1981 |
| 6.4 mL/kg | $LD_{50}$ (young adults) | Kimura et al. 1971. IN NRC 1981 |
| 3 mL/kg | $LD_{50}$ | Kimura et al. 1971. IN NRC 1981 |
| 1 mL/kg | $LD_{50}$ | Kimura et al. 1971. IN NRC 1981 |
| Chronic exposures | | |
| SPECIES: Rat | | |
| 590 mg/kg (5 x/wk for 6 mo) | No adverse effects on cell counts of bone marrow or circulating blood | Wolfe et al. 1956. IN NRC 1981 |
| 354 mg/kg (5 x/wk for 6 mo) | No adverse effects on cell counts of bone marrow or circulating blood | Wolfe et al. 1956. IN NRC 1981 |
| 118 mg/kg (5 x/wk for 6 mo) | No adverse effects on cell counts of bone marrow or circulating blood | Wolfe et al. 1956. IN NRC 1981 |
| SPECIES: Rabbit | | |
| 700 mg/kg/d for 6 wk | Lack of myelotoxicity | Speck and Moeschlin 1968. IN NIOSH 1977 |
| 300 mg/kg/d for up to 9 wk | Lack of myelotoxicity | Speck and Moeschlin 1968. IN NIOSH 1977 |

| Exposure Level (and Duration) | Effects | Reference |
|---|---|---|
| SPECIES: Mouse | | |
| 1.0 to 0.8 g/kg (12 d) | Increased frequency of chromosome damage in bone marrow cells | Lyapkalo 1973. IN NRC 1981 |
| 1 mg/kg | Effects on blood, thymus, spleen and bone marrow | Gerarde 1956. IN NIOSH 1977 |

7.4.3 Carcinogenicity.

| Exposure Level (and Duration) | Effects | Reference |
|---|---|---|
| SPECIES: Rat | | |
| Up to 300 ppm for as long as 18 mo | Has not been demonstrated to be carcinogenic | PTP 1981 |

7.4.4 Teratogenicity and Mutagenicity.

| Exposure Level (and Duration) | Effects | Reference |
|---|---|---|
| SPECIES: Human | | |
| 200 ppm (15 yr) | No significant increase in the number of chromosome aberrations | Forni et al. 1971. IN NRC 1981 |
| SPECIES: Rat | | |
| 610 mg/m$^3$ (4 h/d for 4 mo) | Chromosome aberration persisting for at least 1 month after termination of exposure. Leukosis | Dobrokhotov 1977. IN NRC 1981 |
| 1.0 to 0.8 g/kg 12 d (subcutaneous) | Increased frequency (13.7%) of chromosome damage in the bone marrow cells of rats, compared with 4.2% in a control group | Lyapkalo 1973. IN NRC 1981 |
| SPECIES: Mouse | | |
| 900 mg/m$^3$ (24 h/d for 7 d, day 6 to day 13 of pregnancy) | Increased skeletal abnormalities, teratogenicity not proven. Retardation of fetal development | Hudak and Unguary 1978. IN NRC 1981 |

| Exposure Level (and Duration) | Effects | Reference |
|---|---|---|
| SPECIES: Bacteria, yeast and mouse lymphoma | All microbial tests were negative; however, bacterial tests were somewhat varied because of the extreme toxicity of toluene to these organisms | Litton Bionetics, Inc., 1978. IN NRC 1981 |

## 7.5 Symptoms of Exposure

General symptoms of exposure found in most information sources have not been specifically referenced. Only those of a more specific or unusual nature have their sources indicated.

### 7.5.1 Inhalation.

1. Lassitude, hilarity (NIOSH 1977).
2. Headache.
3. Impairment of coordination and reaction time (Sax 1979).
4. Irritation of eyes and upper respiratory tract.
5. Dizziness, collapse, loss of consciousness (Wilson 1943. IN NRC 1981).
6. Nausea, vomiting, difficulty breathing (CHRIS 1978).
7. Anesthesia, respiratory arrest (CHRIS 1978).
8. Decreased systolic blood pressure and heart rate (Oguta 1970. IN NRC 1981).
9. Psychological effects (Patty 1981).
10. High concentrations cause pulmonary edema (AAR 1981).
11. Death.

### 7.5.2 Ingestion.

1. Nausea.
2. Depressed respiration (AAR 1981).
3. Vomiting.
4. Griping and diarrhea (AAR 1981).
5. Loss of consciousness (CHRIS 1978).

### 7.5.3 Skin Contact.

1. Irritation.
2. Defatting of skin (GE 1979).

3. Dermatitis, fissuring (NIOSH/OSHA 1981).

**7.5.4 Eye Contact.**

1. Conjunctival irritation.
2. Transient corneal damage (NIOSH/OSHA 1981).

**7.6 Human Toxicity to Decay or Combustion Products**

Incomplete combustion can yield carbon monoxide (AAR 1981).

**7.6.1 Carbon Monoxide.** Carbon monoxide is a colourless, practically odourless gas which is a chemical asphyxiant. It causes hypoxia by complexing with hemoglobin and reducing the oxygen-carrying capacity of the blood. Excessive exposures will result in death from asphyxia. More moderate exposures may cause headaches and affect mental functions. The effects of moderate exposures are reversible although considerable time is required to reverse the carbon monoxide-hemoglobin complexing reaction. The TLV® for carbon monoxide is 50 ppm (8-h TWA) and 400 ppm (STEL) (TLV 1983).

# 8 CHEMICAL COMPATIBILITY

## 8.1 Compatibility of Toluene with Other Chemicals and Chemical Groups

| SPECIFIC CHEMICAL OR CHEMICAL GROUP | HEAT GENERATION | FIRE | EXPLOSION | FORMATION OF FLAMMABLE GASES | VIOLENT POLYMERIZATION | DECOMPOSITION | FORMATION OF TOXIC FUMES | FORMATION OF SUBSTANCES OF GREATER TOXICITY | PRESSURIZATION IN CLOSED VESSELS | SOLUBILIZATION | VIOLENT REACTION | NON-HAZARDOUS REACTION | SPECIFICS | REFERENCE |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| **GENERAL** | | | | | | | | | | | | | | |
| Heat | | | | | | X | | | | | | | | Sax 1979 |
| Fire | | X | | | | | | | | | | | Extremely flammable | Bretherick 1979 |
| **SPECIFIC CHEMICALS** | | | | | | | | | | | | | | |
| Bromine Trifluoride | | X | | | | | | | | X | | | Reacts with solvents generally | Bretherick 1979 |
| 1,3-Dichloro-5, 5-dimethyl-2, 4-imidazolidindione | | | X | | | | | | | | | | | Bretherick 1979 |
| Dinitrogen Tetraoxide | | | X | | | | | | | | | | at 50°C | Bretherick 1979 |
| Nitric Acid | | X | X | | | | | | | | | | Reacts with hydrocarbons generally | Bretherick 1979 |
| Silver Perchlorate | | | X | | | | | | | | | | May form explosive complex | NFPA 1978 |
| Tetranitromethane | | | X | | | | | | | | | | Hydrocarbons generally | Bretherick 1979 |

**8.1 Compatibility of Toluene with Other Chemicals and Chemical Groups (Cont'd)**

| SPECIFIC CHEMICAL OR CHEMICAL GROUP | HEAT GENERATION | FIRE | EXPLOSION | FORMATION OF FLAMMABLE GASES | VIOLENT POLYMERIZATION | DECOMPOSITION | FORMATION OF TOXIC FUMES | FORMATION OF SUBSTANCES OF GREATER TOXICITY | PRESSURIZATION IN CLOSED VESSELS | SOLUBILIZATION | VIOLENT REACTION | NON-HAZARDOUS REACTION | SPECIFICS | REFERENCE |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| Uranium Hexafluoride | | | | | | | | | | X | | | Reacts with aromatics generally | Bretherick 1979 |
| **CHEMICAL GROUPS** | | | | | | | | | | | | | | |
| Strong Oxidizing Agents | X | | | | | | | | | X | | | | EPA 600/2-80-076 |

# 9 COUNTERMEASURES

## 9.1 Recommended Handling Procedures

The following procedures have been derived from a literature review. To avoid any deviation from the intended meaning, the wording of the original source has been presented essentially unchanged - in so doing, it is recognized that there may be some discrepancies between different sources of information. Countermeasures are dependent on the situation; thus, what may appear to be conflicting information may in fact be correct for different situations. The following procedures should not be considered as Environment Canada's recommendations.

**9.1.1 Fire Concerns.** Toluene emits vapours that can form flammable mixtures with air (NFPA 1978; GE 1979). Vapours may move along the ground and be ignited by open flames or sparks at locations remote from the site at which it is handled and flash back (MCA 1956). Nitric acid and toluene, especially in combination with sulphuric acid, will produce nitrated compounds which are dangerously explosive (GE 1979).

**9.1.2 Fire Extinguishing Agents.** Use water spray to cool containers involved in a fire to help prevent rupture. Water may be ineffective for putting out fires involving toluene (NFPA 1978; GE 1979).

Small Fires: Dry chemical, $CO_2$, foam or water spray.

Large Fires: Water spray, fog or foam.

Move containers from fire area if this can be done without risk. Stay away from tank ends. For massive fires, use unmanned hose holder or monitor nozzles (ERG 1980).

**9.1.3 Spill Actions.**

**9.1.3.1 General.** Stop or reduce discharge of material if this can be done without risk. Eliminate all sources of ignition. Avoid skin contact or inhalation (GE 1979). Use water spray to reduce vapours (ERG 1980). Application of fluorocarbon water foam to diminish vapours should be considered (EPA 670/2-75-042).

The following absorbent materials have shown possible applicability for vapour suppression and/or containment of toluene: cellosive and hycar (ICI 1982).

Leaking containers should be removed to the outdoors or to an isolated, well-ventilated area and the contents transferred to other suitable containers (MCA 1956).

9.1.3.2 **Spills on land.** Contain if possible; remove free liquid with explosion-proof equipment, soak residue up with sand, earth or vermiculite and shovel into covered metal containers for disposal (GE 1979; ERG 1980). Application of fly ash or cement powder to absorb the liquid may be considered. Application of a gelling agent may also be used to immobilize the spill (EPA 670/2-75-042).

9.1.3.3 **Spills on water.** Contain if possible with booms or natural barriers to limit spreading. Use of surface acting agents to compress and thicken spilled material will require approval of environmental authorities. Remove trapped material with suction hoses (EPA 670/2-75-042).

9.1.4 **Cleanup and Treatment.**

9.1.4.1 **Spills on land.** After containment of toluene into a holding area, pumping and/or sorbents can be applied to remove the slick. Activated carbon can be applied to remove the remaining liquid and vapours. Remove recovered material for disposal (OHM-TADS 1981).

9.1.4.2 **Spills on water.** After containment of spilled material with booms, (oil) skimming equipment can be used to remove the slick (OHM-TADS 1981). Most oil spill equipment techniques can be used (EPA 670/2-75-042). Activated carbon can be applied at 10% of the spill amount over region occupied by 10 mg/L or greater concentrations (EPA 670/2-75/042). Peat moss can also be applied (OHM-TADS 1981).

9.1.4.3 **General.** For treatment of contaminated water, gravity separation of solids, followed by skimming of surface to remove spilled material is recommended. The contaminated water is then passed through dual media filtration and carbon adsorption units. Recommended carbon ratio: 1.0 kg to 10.0 kg soluble material. The wastewater from backwash of the filtration and adsorption units is returned to the gravity separator (EPA 600/2-77-227).

The following treatment processes have shown possible applicability for spill countermeasures.

| Process | % Removal (TSA 1980) | Process | Maximum % Removal (EPA 600-8-80-042) |
|---|---|---|---|
| Biological | 48-100 | Clarification/Sedimentation | 69 |
| | | Clarification/Sedimentation with Chemical Addition (Alum) | 93 |

| Process | % Removal (TSA 1980) | Process | Maximum % Removal (EPA-600-8-80-042) |
|---|---|---|---|
| Stripping | 73-92 | Clarification/Sedimentation with Chemical Addition (Alum, Polymer) | 73 |
| Solvent Extraction | 94-96 | Clarification/Sedimentation with Chemical Addition (Alum, Lime) | 96 |
| | | Gas Floatation (Dissolved Air Floatation) | 92 |
| | | Gas Floatation with Chemical Addition (Calcium Chloride, Polymer) | 65 |
| | | Gas Floatation with Chemical Addition (Polymer) | 59 |
| | | Granular Media Filtration | >99 |
| | | Activated Sludge | >99 |
| | | Lagoon (Aerated) | >95 |
| | | Solvent Extraction | 96 |
| | | Granular Activated Carbon Adsorption | >99 |
| Carbon Adsorption | 79-98 | Powdered Carbon Addition (with Activated Sludge) | 79 |

9.1.5 **Disposal.** Waste toluene must never be discharged directly into sewers or surface waters. Reclaiming by distillation or disposal via a licensed waste disposal company should be considered. It may be incinerated under properly controlled conditions (GE 1979). Additional flammable solvent may be added to increase burning of the material (OHM-TADS 1981).

9.1.6 **Charcoal Filtration Data** (EPA 600/8-80-023). The following recommended values for the removal of toluene in water by either the single stage powdered carbon contactor or the granular carbon column adsorption system were obtained using the Freundlich Adsorption equation. The derivation of the equation is discussed in the Introduction Manual.

SINGLE STAGE POWDERED CARBON CONTACTOR SYSTEM

| Initial Concentration (mg/L) | Carbon Doses (mg/L) | Final Concentration (mg/L) |
|---|---|---|
| 1.0 | 96 | 0.1 |
| 1.0 | 290 | 0.01 |
| 1.0 | 820 | 0.001 |
| 0.1 | 27 | 0.01 |
| 0.1 | 81 | 0.001 |
| 0.01 | 7.4 | 0.001 |

GRANULAR CARBON COLUMN SYSTEM: (ESTIMATED)

| Initial Concentration (mg/L) | Carbon Doses or Requirements (to achieve breakthrough) (mg/L) |
|---|---|
| 1.0 | 38 |
| 0.1 | 11 |
| 0.01 | 2.9 |

**9.1.7 Protective Measures.** For entry into a situation where the spilled material and its characteristics are unknown, self-contained breathing apparatus and a totally encapsulated chemical suit should be worn.

If the spilled material is known to be toluene:

- Response personnel should be provided with and required to use impervious clothing, gloves, face shields (20 cm minimum), and other appropriate protective clothing necessary to prevent repeated or prolonged skin contact with liquid toluene. PVC and rubber are not recommended for gloves or outer wear (OHM-TADS 1981). Neoprene has been recommended as a chemical protection suit material (GE 1979).
- Any clothing which becomes wet with liquid toluene should be removed immediately and not reworn until the toluene is removed from the clothing.
- Splash-proof safety goggles can also be used where liquid toluene may contact the eyes (NIOSH/OSHA 1981).

- Eye wash fountains and safety showers should be readily available in areas of use or in spill situations (GE 1979).

The following is a list of the minimum respiratory protection recommended for personnel working in areas where toluene is present (NIOSH/OSHA 1981).

| Condition | Minimum Respiratory Protection* Required Above 200 ppm |
|---|---|
| Vapour Concentration 500 ppm or less | Any chemical cartridge respirator with organic vapour cartridge(s).<br>Any supplied-air respirator.<br>Any self-contained breathing apparatus. |
| 1,000 ppm or less | A chemical cartridge respirator with a full facepiece and an organic vapour cartridge(s). |
| 2,000 ppm or less | A gas mask with a chin-style or a front- or back-mounted organic vapour canister. |
| | Any supplied-air respirator with a full facepiece, helmet or hood. |
| | Any self-contained breathing apparatus with a full facepiece. |
| Greater than 2,000 ppm or entry and escape from unknown concentrations | Self-contained breathing apparatus with a full facepiece operated in pressure-demand or other positive pressure mode. |
| | A combination respirator which includes a Type C supplied-air respirator with a full facepiece operated in pressure-demand or other positive pressure or continuous-flow mode and an auxiliary self-contained breathing apparatus operated in pressure-demand or other positive pressure mode. |
| Fire Fighting | Self-contained breathing apparatus with a full facepiece operated in pressure-demand or other positive pressure mode. |
| Escape | Any gas mask providing protection against organic vapours. |
| | Any escape self-contained breathing apparatus. |

* Only NIOSH-approved or MSHA-approved equipment should be used.

**9.1.8 Special Precautions.** Store toluene in a cool, clean, well-ventilated area away from sources of heat and ignition and away from oxidizing agents. No smoking in areas of storage or use. Only nonsparking tools should be used near toluene. Use safety cans for

handling small amounts. Ground and bond metal containers for liquid transfers to prevent sparks from static electricity. Protect containers from physical damage (GE 1979).

## 9.2 Specialized Countermeasures Equipment, Materials or Systems

The following items are devices or materials specially tested or claimed to be effective for controlling toluene spills. This information is taken from a previous study (Dillon 1982) and should not be considered to be the only suitable specialized countermeasures equipment, materials or systems available. More details on the specifications, performance and availability of these items can be found in the referenced study.

| | |
|---|---|
| Leak Plugging | Rockwell External Leak Plugging System |
| Vapour Suppression | National, Lorcon, Rockwood, 3M, MSA Foams |
| Recovery from Water - Floating Materials | Amine Carbamate Gelling Agent and Application System |
| Pumps for Liquids | U.S. Coast Guard ADAPTS |
| Removal from Water | EPA Mobile Physical-Chemical Treatment Trailers |
| Treating Agents | Hazorb (sorbent) |

# 10 PREVIOUS SPILL EXPERIENCE

This section contains information on previous spill experience which will be useful to readers in understanding spill response and countermeasures. Only those which meet these criteria are included; the number of experiences is not an indication of the problems or frequency of spillage. As technology in spill control advances, this section will be updated in future manual revisions to include the most useful information.

## 10.1 Train Derailment (HMIR 1981)

A train derailment occurred in an urban area. Two tank cars containing toluene tipped over and struck the asphalt pavement at a highway crossing. One of the cars spilled its entire load of approximately 98,000 L through a gash in the tank while the other spilled about half of its contents through its dome. A third tank car carrying toluene, along with four other cars filled with anhydrous ammonia, had also derailed, but did not rupture. Firefighters arrived at the site and applied water spray to cool the ammonia cars in order to prevent an explosion. One hundred persons were evacuated in the vicinity of the spill area. Cleanup crews arrived at the spill site a few hours later and noticed that most of the spilled toluene had flowed into a ditch adjacent to the railroad and down into a swamp area, about 400 m away. Approximately 152,000 L of contaminated water, containing about 50 percent toluene, were pumped from the ditch and swamp area, using vacuum trucks. The contaminated water was then taken to a solvent recovery facility. Approximately 2,300 $m^3$ of contaminated soil and asphalt were removed from the spill area and disposed of in a hazardous waste landfill. In some areas, up to 3 m of soil had to be removed in order to mitigate the contamination. No serious environmental damage resulted from the accident.

This incident illustrates the extensive cleanup required if toluene is allowed to flow away from the site. Immediate containment of the spilled liquid and contaminated water from firefighting may have eliminated some of the cleanup required. The use of vacuum trucks for recovery and a solvent recovery facility for disposal (actually re-use) are illustrated.

# 11 ANALYTICAL METHODS

The general approach adopted for each of the Priority Chemicals was as follows.

Methods have been documented here for analyses of samples from air, water and soil in a normally equipped chemical laboratory remote from the spill site. Customary sources of standard or recommended analytical methods were consulted, and outlines are presented for each chemical. These sources included publications of the U.S. National Institute for Occupational Safety and Health (NIOSH), the U.S. Environmental Protection Agency (EPA), the American Water Works Association (AWWA), the American Society for Testing and Materials (ASTM), and the American National Standards Institute (ANSI).

If the standard or recommended methods were judged to be reliable and specific enough for the analysis of environmental and materials samples from spill sites and if they do not require highly specialized laboratory equipment, no additional methods were sought.

If especially simple, reliable tests (e.g., commonly used industrial methods) were found, they have been presented as well.

## 11.1 Quantitative Method for the Detection of Toluene in Air

**11.1.1 Gas Chromatography** (NIOSH 1977). A range of 145.5 to 582 ppm toluene in air may be analyzed by gas chromatography (GC). This is currently the most practical method for identifying and measuring many volatile organic compounds. Retention time or Kovats index is used to identify the compound but positive identification requires the use of more than one column, special detectors, spiking the sample with the suspected component or combining GC with mass spectrometry (MS).

A known volume of air is drawn through a glass sampling tube. The front section is packed with 100 mg of activated charcoal which is separated from 50 mg of charcoal in the back section by a 2 mm section of urethane foam. The desorption efficiency of the charcoal must be known or measured to produce a reliable result. A 2 L air sample is recommended but this should be reduced if there is a large amount of toluene present. The sample is desorbed with 1.0 mL carbon disulphide. (Alternatively, one source recommends 0.5 mL carbon disulphide.) Analysis is by GC with a flame ionization detector (FID) using a column packed with 50/80 mesh Porapak Q. In high humidity, the condensation of water vapour reduces the collection efficiency of the

charcoal and the concentration of toluene may appear to be lower than it actually is. The loss of sample through overloading the charcoal tube may also produce lower results. This can be determined by desorbing the back and front portions separately. If the back section is greater than 25 percent of the front portion, overloading has occurred. An advantage of this method is that in the event of a mixed spill, two or more substances may be analyzed simultaneously.

Other sample collection methods may be useful in certain circumstances. A 1 L air sample may be collected and a 50 mL aliquot injected into a freeze-out trap at -80°C, packed with 20 percent Dow-Corning SF200 on 60/80 mesh Columnpak. Toluene is released by heating the trap to 100°C (Pilar 1973). Where a GC is used at a spill site, an automated gas sampling valve may be used. Outside air is injected directly through a 1 $cm^3$ sampling loop by means of a diaphragm pump (Hester 1979). This is useful for ongoing monitoring. Alternately, the sample may be drawn through an adsorption tube packed with 80/100 mesh Porapak. The sample is thermally desorbed at 250°C directly into the GC (Baxter 1980). Advantages of these methods include the simplification of sample preparation and the elimination of solvent interference on the chromatograph.

Alternate columns are 10 percent Carbowax on 80/100 mesh chromosorb W (ASTM 1981), 10 percent 1,2,3-tris(2-cyanoethoxy) propane on 100/200 mesh chromosorb PAW (Hester 1979), 1 percent OV-101 (or SE-30) on 100/120 mesh chromosorb W (Jones 1976; IERL 1976), and 30 percent N,N-Bis-2-cyanoethylformamide on 80/100 mesh pink support (Baxter 1980).

The use of photoionization detector (PID) rather than FID, allows analysis at the sub-ppm level without pre-concentration or trapping. Sample dilution may be necessary if GC-PID is used as a vehicle portable method and transported to the spill site where the concentration may exceed the range of the detector (Hester 1979). Detectors using infrared absorption, with carbon monoxide or carbon dioxide lasers as sources, have a detection limit of 3 ppb for toluene (Kreuzer 1972).

### 11.2 Qualitative Method for the Detection of Toluene in Air

Air is drawn through a glass sampling tube as in Section 11.1.1. The sample is desorbed with chloroform and identified using the Friedel-Crafts alkylation reaction. Anhydrous aluminum chloride (about 100 mg) is placed in a test tube and heated until it sublimes. When it has cooled, a drop of the extract and two drops of chloroform are added with shaking. The appearance of an orange-red colour indicates the presence of an aromatic ring (Owen 1969).

## 11.3 Quantitative Methods for the Detection of Toluene in Water

**11.3.1 Gas Chromatography** (ASTM 1981). Concentrations of toluene greater than 1 ppm can be measured by direct injection of the water sample into the gas chromatograph (GC). This is the method of choice when the identification of a spill is necessary or when low levels of toluene are present (see Section 11.1.1).

A representative sample is collected in a glass bottle. Analysis is by GC using various columns and detectors as described in Section 11.1.1. If the sample concentration is less than 1 ppm, the sample may be concentrated by evaporation, freeze-out, solvent extraction, or adsorption on activated charcoal. Highly concentrated samples may be diluted. Particulate or suspended matter must be removed by centrifugation or membrane filtration. Acidification of the sample will help to dissolve particulate matter. An advantage of the GC method is that in the event of a mixed spill, two or more substances may be separated and analyzed. This method can be combined with mass spectrometry for positive identification of the sample.

**11.3.2 Infrared Spectroscopy** (AWWA 1976). Concentrations of 4 to 40 ppm toluene in water can be measured using 1 cm path length cells with a precision of $\pm$10 percent.

Approximately 1 L of water is collected, the volume determined accurately and the sample acidified with hydrochloric acid. The toluene is extracted using Freon 113® (1,1,2-trichloro-1,2,2-trifluoroethane). Recovery is 99 percent. Using matched quartz cells with Freon 113® in the reference beam of a double-beam IR recording spectrophotometer, the sample is scanned from 3,200 $cm^{-1}$ to 2,700 $cm^{-1}$. The advantage of this method over methods that involve heating the sample is that sample loss through volatilization is minimized. This method lacks high sensitivity but is adequate for spills. It is not specific and assumes that the identity of the spill is known.

**11.3.3 Gravimetric** (AWWA 1976). This method is suitable for concentrations of toluene greater than 10 ppm. The precision is $\pm$ 6 percent.

Approximately 1 L of sample is collected, the volume accurately determined and the sample acidified with hydrochloric acid. The toluene is extracted using Freon 113® (1,1,2-trichloro-1,2,2-trifluoroethane). Recovery is 99 percent. The Freon 113® is distilled from the extraction flask on a water bath at 70°C. Sample loss may be a problem if the temperature is not carefully controlled. Air is drawn through the flask for the final minute to remove all traces of the Freon 113®. The flask is cooled and weighed.

This is a simple and inexpensive method which does not require complex instrumentation. It is not highly sensitive or specific but is adequate for spills of a known composition.

### 11.4 Qualitative Method for the Detection of Toluene in Water

The water sample is extracted with chloroform and the Friedel-Crafts alkylation reaction is used to identify aromatic hydrocarbons. Anhydrous aluminum chloride (about 100 mg) is placed in a test tube and heated until it sublimes. When it has cooled, a drop of the extract and two drops of chloroform are added with shaking. The appearance of an orange-red colour indicates the presence of an aromatic ring (Owen 1969).

The infrared spectroscopy method discussed in Section 11.3.2 may be used for qualitative identification by observing the presence of absorption bands between 3,200 $cm^{-1}$ and 2,700 $cm^{-1}$ (AWWA 1976).

### 11.5 Quantitative Methods for the Detection of Toluene in Soil

**11.5.1 Gas Chromatography** (NIOSH 1977; ASTM 1981). Concentrations of toluene at the ppm level may be detected using a flame ionization detector. The detection limit may be extended to the ppb level through the use of a photoionization detector.

Approximately 20 g of soil, accurately weighed, are collected in a glass jar and dried by the addition of magnesium sulphate. Freon 113® (1,1,2-trichloro-1,2,2-trifluoroethane) is used to extract toluene from the soil. The Freon 113® is distilled from the extraction flask on a water bath at 70°C. Sample loss may be a problem if the temperature is not carefully controlled. Air is drawn through the flask for the final minute to remove all traces of the Freon 113®. The toluene-containing residue is dissolved in carbon disulphide. This is injected into a gas chromatograph equipped with a column and detector as described in Section 11.1.1. This is the method of choice when the identification of a spill is necessary or when low levels of toluene are present.

**11.5.2 Infrared Spectroscopy** (AWWA 1976). Concentrations of 4 to 40 ppm toluene in soil may be measured using 1 cm path length cells.

Approximately 20 g of soil, accurately weighed, are collected in a glass jar and dried by the addition of magnesium sulphate. Freon 113® (1,1,2-trichloro-1,2,2-trifluoroethane) is used to extract the toluene from the soil. Using quartz cells with Freon 113® in the reference beam of a double-beam IR recording spectrophotometer, the sample is scanned from 3,200 $cm^{-1}$ to 2,700 $cm^{-1}$. This is a simple, inexpensive method. It lacks sensitivity but is adequate for spills of a known composition.

**11.5.3 Gravimetric (AWWA 1976).** This method is used for the detection of concentrations greater than 10 ppm toluene in soil.

Approximately 20 g of soil, accurately weighed, are collected in a glass jar and dried by the addition of magnesium sulphate. Freon 113® (1,1,2-trichloro-1,2,2-trifluoroethane) is used to extract the toluene then distilled from the extraction flask on a water bath. A temperature of 70°C must be carefully controlled or sample loss will be a problem. Air is drawn through the flask for the final minute. The flask is cooled and weighed. This is a simple, inexpensive method. It lacks sensitivity and specificity, but is adequate for spills of a known composition.

## 11.6 Qualitative Method for the Detection of Toluene in Soil

The Friedel-Crafts alkylation reaction is used to identify aromatic hydrocarbons. A sample of soil is extracted with Freon 113® (1,1,2-trichloro-1,2,2-trifluoroethane) and the Freon 113® is evaporated as in Section 11.5.3 above. The residue is taken up in chloroform. Anhydrous aluminum chloride (about 100 mg) is placed in a test tube and heated until it sublimes. When it has cooled, several drops of the chloroform containing the residue are added with shaking. The appearance of an orange-red colour indicates the presence of a compound containing an aromatic ring (Gilreath 1954).

The infrared spectroscopy method discussed in Section 11.5.2 may be used for qualitative identification of toluene by observing the presence of absorption bands between 3,200 $cm^{-1}$ and 2,700 $cm^{-1}$ (AWWA 1976).

# 12 REFERENCES AND BIBLIOGRAPHY

## 12.1 References

AAR 1981: BDM Corporation, The AAR Hazardous Materials Data Base, Prepared for the Association of American Railroads, Parts I and II, McLean, Virginia. (May, 1981).

API 1982: Hazardous Substances Spill Contingency Planning Guide: Specific Materials: 2. Toluene, Prepared for the American Petroleum Institute by Rockwell International, Newbury Park, California. (1982).

APOP 1975: National Academy of Sciences, Assessing Potential Ocean Pollutants, Washington, D.C. (1975).

ASTM 1980: American Society for Testing and Materials, Compilation of Odor and Taste Threshold Values Data, ASTM, Philadelphia, Pennsylvania, ASTM Data Series DS-48A. (1980).

ASTM 1981: American Society for Testing and Materials, Annual Book of ASTM Standards, Part 26: Gaseous Fuels; Coal and Coke; Atmospheric Analysis, ASTM, Philadelphia, Pennsylvania, D3687-78. (1981).

AWWA 1976: American Water Works Association, Standard Methods for the Examination of Water and Wastewater, 14th Edition, American Public Health Association, Washington, D.C., pp. 515-521. (1976).

Bakke 1979: Bakke, T., Skjoldal, H.R., "Effects of Toluene on the Survival, Respiration and Adenylate System of a Marine Isopod", Marine Pollution Bulletin, Vol. 10, No. 4, pp. 111-115. (1979).

Baxter 1980: Baxter, H.G., Blakemore, R., Moore, J.P., "The Measurement of Airborne Benzene Vapour", Ann. Occup. Hyg., Vol. 23, p. 117. (1980).

Berry 1980: Berry, W.O., "A Comparative Study of the Uptake of Toluene by Bluegill Sunfish (Lepomis macrochirus) and Crayfish (Orconectes rusticus)", Environ. Pollut. Ser. A. Ecol. Biol., Vol. 21, No. 2, pp. 109-120. (1980).

Blokker 1971: Blokker, P.C., Migration of Oil in Soil, Presented at International Conference "Antinquinamenta 71", Milan Fair of Anti-Pollution Equipment, Report No. 9/71. Milan, Italy. (November, 1971).

Bretherick 1979: Bretherick, L., Handbook of Reactive Chemical Hazards, Second Edition, Butterworths, London, England. (1979).

Brown 1978: Brown, R.A., Weiss, F.T., Fate and Effects of Poly-nuclear Aromatic Hydrocarbons in the Aquatic Environment, American Petroleum Institute, Washington, D.C. (September, 1978).

CBG 1980: Southam Business Publications Ltd., "1981 Chemical Buyers' Guide", Canadian Chemical Processing, Vol. 64, No. 9, Don Mills, Ontario. (December, 1980).

CCPA 1981: The Canadian Chemical Producers' Association, List of Members, Toronto, Ontario. (October, 1981).

CDS 1967: National Association of Corrosion Engineers, Corrosion Data Survey, Houston, Texas. (1967).

Chem. Eng. 1975: Yaws, C.L., "Physical and Thermodynamic Properties", Chemical Engineering, Vol. 82, No. 20, pp. 73-81. (29 September 1975).

Chiou and Schmedding 1982: Chiou, C.T., Schmedding, D.W., "Partitioning of Organic Compounds in Octanol-Water Systems", Environ. Sci. Technol., Vol. 16, No. 1, pp. 4-10. (1982).

CHRIS 1974: U.S. Department of Transportation, CHRIS Hazard Assessment Handbook, U.S. Coast Guard, Washington, D.C., CG-446-3. (April, 1974).

CHRIS 1978: U.S. Department of Transportation, Coast Guard, Chemical Hazards Response Information System (CHRIS), Washington, D.C. (1978).

Corpus 1983: Corpus Information Services Ltd., "Toluene", Chemical Product Profiles, Don Mills, Ontario. (April, 1983).

CRC 1980: Weast, R.C. (ed.), CRC Handbook of Chemistry and Physics, 60th Edition, Chemical Rubber Publishing Company, Cleveland, Ohio. (1980).

DCRG 1978: Dow Chemical Company, Dow Chemical Resistance Guide for Dow Plastic Lined Piping Products, Midland, Michigan. (1978).

Dillon 1982: M.M. Dillon, Survey of Countermeasures Systems for Hazardous Material Spills, Environment Canada, Ottawa, Canada. (1982).

Doc. TLV 1981: American Conference of Governmental Industrial Hygienists (ACGIH), Documentation of Threshold Limit Values, Fourth Edition, Cincinnati, Ohio. (1981).

Dow ERIS 1979: Dow Chemical Canada Inc., Emergency Response Information Sheet, Sarnia, Ontario. (23 July 1979).

Dow MSDS 1979: Dow Chemical Canada Inc., Material Safety Data Sheet, Sarnia, Ontario. (30 July 1979).

Dow PPS 1972: Dow Chemical Company, Dow Plastic Lined Piping Systems, Midland, Michigan, Brochure 178-102-72. (1972).

DPPED 1967: DOM-X, DOM-X Plastic Pipe Engineering Data, Toronto, Ontario. (1967).

Eisenberg 1975: Eisenberg, N.A., Lynch, C.J., Kumar, R.M., A Critical Technical Review of Six Hazard Assessment Models, Enviro Control Inc., Rockville, Maryland. (December, 1975).

Elovaara 1979: Elovaara, E., Hemminki, K., Vainio, H., "Effects of Methylene Chloride, Trichloroethane, Trichloroethylene, Tetrachloroethylene and Toluene on the Development of Chick Embryos", Toxicology, Vol. 12, No. 2, pp. 111-120. (1979).

EPA 440/9-75-009: Environmental Protection Agency, Supplement to Development Document: Hazardous Substances Regulations, Section 311 Federal Water Pollution Control Act, U.S. Environmental Protection Agency, Office of Water and Standards, Washington, D.C., EPA 440/9-75-009. (November, 1975).

EPA 600/2-77-227: Huibregtse, K.R., et al., Manual for the Control of Hazardous Material Spills - Volume One - Spill Assessment and Water Treatment Techniques, U.S. Environmental Protection Agency, National Environmental Research Center, Cincinnati, Ohio, EPA 660/2-77-227. (November, 1977).

EPA 600/2-80-076: Hatayama, H.K., Chen, J.J., deVera, E.R., Stephens, R.D., Storm, D.L., A Method for Determining the Compatibility of Hazardous Wastes, Municipal Environmental Research Laboratory, Office of Research and Development, U.S. Environmental Protection Agency, Cincinnati, Ohio. (April, 1980).

EPA 600/8-80-023: Dobbs, R.A., Cohen, J.M., Carbon Adsorption Isotherms for Toxic Organics, U.S. Environmental Protection Agency, Waste Water Research Division, Municipal Environmental Research Laboratory, Cincinnati, Ohio, EPA 600/8-80-023. (April, 1978).

EPA 600/8-80-042E: Environmental Protection Agency, Treatability Manual, Volume V, Summary, U.S. Environmental Protection Agency, Office of Research and Development, Washington, D.C., EPA 600/8-80-042E. (July, 1980).

EPA 670/2-75-042: Pilie, R.J., et al., Methods to Treat, Control and Monitor Spilled Hazardous Materials, U.S. Environmental Protection Agency, National Environmental Research Center, Cincinnati, Ohio, EPA 670/2-75-042. (June, 1975).

ERG 1980: U.S. Department of Transportation, Hazardous Materials, 1980 Emergency Response Guidebook, U.S. Department of Transportation, Research and Special Programs Administration, Materials Transportation Bureau, Washington, D.C. (1980).

Finachem PDS 1981: Finachem Canada Inc., Toluene Production Data Sheet, Montreal, Quebec. (1981).

Finachem PI 1979: Finachem Canada Inc., Aromatic Solvents Production Information, Montreal, Quebec. (September, 1979).

Fingas 1979: Fingas, M.F., Duval, W.S., Stevenson, G.B., The Basics of Oil Spill Cleanup, Environment Canada, Ottawa, Canada. (1979).

Fingas 1980: Fingas, M.F., Sydor, M., Development of an Oil Spill Model for the St. Lawrence River, Technical Bulletin No. 116, Inland Waters Directorate, Environment Canada, Ottawa, Canada. (1980).

FKC 1975: Lowenheim, F.A., Moran, M.K., Faith, Keye's and Clark's Industrial Chemicals, Wiley-Interscience, New York, New York. (1975).

Freeze and Cherry 1979: Freeze, R.A., Cherry, J.A., Groundwater, Prentice-Hall, Englewood Cliffs, New Jersey. (1979).

GE 1979: General Electric Company, Material Safety Data Sheets, Material Safety Information Services, Schenectady, New York. (August, 1979).

GF: GF Plastic Systems Inc., GF Plastic Systems, Santa Ana, California. Not dated.

GPP: Uniroyal, Guide to Polymer Properties, Uniroyal Inc., Mishawaka, Indiana. Not dated.

Haque 1974: Haque, R., Schmedding, D.W., Freed, U.H., "Aqueous Solubility, Adsorption and Vapour Behavior of Polychlorinated Biphenyl 1254", Environ. Sci. Technol., Vol. 8, No. 2. (February, 1974).

Hester 1979: Hester, N.E., Meyer, R.A., "A Sensitive Technique for Measurement of Benzene and Alkylbenzenes in Air", Environ. Sci. Technol., Vol. 13, No. 1, p. 107. (1979).

HIS 1969: Hydraulic Institute, Hydraulic Institute Standards, 12th Edition, New York, New York. (1969).

HMIR 1981: World Information Systems, "Derailed Tank Cars Spill Sodium Hydroxide in Saskatchewan", Hazardous Material Intelligence Report, p. 4. (27 November 1981).

ICI 1982: Imperial Chemical Industries (ICI), Treatment of Organic Compounds, Appendix 7, Cheshire, England. (April, 1982).

IERL 1976: Environmental Protection Agency, TRW Systems Group, IERL-RTP Procedures Manual: Level of Environmental Assessment, Washington, D.C., EPA 600/2-76-160a. (June, 1976).

ILO 1980: International Labour Organization, Occupational Exposure Limits for Airborne Toxic Substances, Second (Revised) Edition, Geneva, Switzerland. (1980).

ITII 1981: International Technical Information Institute, Toxic and Hazardous Industrial Chemicals Safety Manual for Handling and Disposal with Toxicity and Hazard Data, Japan. (1981).

Johnson 1980: Johnson, W.W., Finley, M.T., Handbook of Acute Toxicity of Chemicals to Fish and Aquatic Invertebrates, U.S. Fish and Wildlife Service, Washington, D.C., p. 85. (1980).

Jones 1971: Jones, H.R., Environmental Control in the Organic and Petrochemical Industries, Noyes Data Corp., Park Ridge, New Jersey, pp. 8-25. (1971).

Jones 1976: Jones, P.W., et al., Technical Manual for Analysis of Organic Materials in Process Streams, Battelle Columbus Laboratories, Columbus, Ohio. (January, 1976).

JSSV 1979: Jenkins Brothers, Jenkins Corrosion Resistant Stainless Steel Valves, New York, New York. (1979).

Juhnke 1978: Juhnke, I., Luedemann, D., "Results of the Study of 200 Chemical Compounds on Acute Fish Toxicity Using the Golden Orfe Test", Z. Wasser Abwasser Forsch., Vol. 11, No. 5, pp. 161-164. (1978).

Kamilova 1979: Kamilova, R.M., Khikmatov, A.K., Pazylova, S.S., Mukhamedova, K.M., "Response of Regional Cotton Varieties to Toluene During Germination", Uzb. Biol. Zh., No. 4, pp. 26-28. (1979).

Kirk-Othmer 1983: Kirk-Othmer Encyclopedia of Chemical Technology, 3rd. Edition, Vol. 23, John Wiley & Sons, New York. (1983).

Kreuzer 1972: Kreuzer, L.B., Kenyon, N.D., Patel, C.K.N., "Air Pollution: Sensitive Detection of Ten Pollutant Gases by Carbon Monoxide and Carbon Dioxide Lazers", Science, Vol. 177, p. 377. (1972).

Lange's Handbook 1979: Dean, J.A. (ed.), Lange's Handbook of Chemistry, 12th Edition, McGraw-Hill Book Company, New York, New York. (1979).

Lefèvre 1980: Lefèvre, M.J., Becker, E.O., First Aid Manual for Chemical Accidents-For Use with Nonpharmaceutical Chemicals, Dowden, Hutchinson, and Ross Inc., Pennsylvania. (1980).

MacKay and Walkoff 1973: MacKay, D., Walkoff, R.W. "Rate of Evaporation of Low-solubility Contaminants from Water Bodies to Atmosphere", Environ. Sci. Technol., Vol. 7, No. 7. (July, 1973).

MCA 1956: Manufacturing Chemists Association, Toluene, Washington, D.C. (1956).

MHSSW 1976: North Atlantic Treaty Organization (NATO), Manual on Hazardous Substances in Special Wastes, Federal Environmental Agency, Waste Management Division, Berlin, West Germany. (October, 1976).

NFPA 1978: National Fire Protection Association, Fire Protection Guide on Hazardous Materials, Seventh Edition, Boston, Massachusetts. (1978).

NIOSH 1977: National Institute of Occupational Safety and Health, Manual of Analytical Methods, Second Edition, Vol. 3, S. 343., Cincinnati, Ohio. (April, 1977).

NIOSH Guide 1978: U.S. Department of Health, Education and Welfare, Pocket Guide to Chemical Hazards, United States Department of Health, Education, and Welfare, and U.S. Department of Labor, Washington, D.C. (1978).

NIOSH/OSHA 1981: U.S. Department of Health and Human Services, National Institute for Occupational Safety and Health (NIOSH), U.S. Department of Labor, Occupational Safety and Health Administration (OSHA), Occupational Health Guidelines for Chemical Hazards, NIOSH Publication No. 81-123. (1981).

NRC 1981: United States National Research Council, The Alkyl Benzenes, Committee on Alkyl Benzene Derivatives, Board on Toxicology and Environmental Health Hazards, Assemble of Life Sciences, National Academy Press, Washington, D.C. (1981).

OHM-TADS 1981: Oil and Hazardous Materials Technical Assistance Data System, U.S. Environmental Protection Agency, Oil and Special Materials Control Division, Office of Water Program Operations, Washington, D.C. (1981).

Ontario E.P. Act 1971: Ontario Ministry of the Environment, "The Environmental Protection Act, Statutes of Ontario 1971", Chapter 86, as amended; and Regulation 15 (General) as amended. (1971).

Owen 1969: Owen, T.C., Characterization of Organic Compounds by Chemical Methods, Marcel Dekker, Inc., New York, New York, p. 67. (1969).

Patty 1981: Clayton, G.D., Clayton, F.E. (eds.), Patty's Industrial Hygiene and Toxicology, Vols. 2A, 2B, Third Revised Edition, John Wiley and Sons Canada Limited, Toronto, Ontario. (1981).

Perry 1973: Perry, R.H., Chilton, C.H. (ed.), Chemical Engineer's Handbook, Fifth Edition, McGraw-Hill Book Company, New York, New York. (1973).

Pickering 1966: Pickering, O.H., Henderson, C., "Acute Toxicity of Some Important Petrochemicals to Fish", Journal of Water Pollution Control Federation, Vol. 38, No. 9, pp. 1419-1429. (1966).

Pilar 1973: Graydon, W.F., "Benzene and Toluene Distribution in Toronto Atmosphere, J. Environ. Sci. Technol., Vol. 7, p. 628. (1973).

Price 1974: Price, K.S., Waggy, G.T., Conway, R.A., "Brine Shrimp Bioassay and Seawater B.O.D. of Petrochemicals", Journal Water Pollution Control Federation, Vol. 46, No. 1. (January, 1974).

PTP 1980: Sittig, M. (ed.), Priority Toxic Pollutants, Health Impacts and Allowable Limits, Noyes Data Corp., New Jersey, pp. 334-337. (1980).

Raj 1974: Raj, P.P.K., Lakekar, A.S., Assessment Models in Support of Hazard Assessment Handbook, Prepared for the Department of Transportation, U.S. Coast Guard, Washington, D.C., p. 238. (January, 1974).

Rosenstock 1977: Rosenstock, H.M., Draxl, K., Steiner, B., Herron, J.T., Energetics of Gaseous Ions, National Bureau of Standards, Washington, D.C. (1977).

Rouse 1961: Rouse. H., Fluid Mechanics for Hydraulic Engineers, Dover Publications, Inc., New York, New York. (1961).

RTDCR 1974: Regulations for the Transportation of Dangerous Commodities by Rail, Canadian Transport Commission, published by Supply and Services Canada, Ottawa, Ontario. (1974).

RTECS 1979: Lewis, R.J., Tatken, R.L., Registry of Toxic Effects of Chemical Substances, 1979, Vols. 1 and 2, National Institute for Occupational Safety and Health (NIOSH), Cincinnati, Ohio. (September, 1980).

Sax 1979: Sax, N.I., Dangerous Properties of Industrial Materials, Fifth Edition, Van Nostrand Reinhold Company, New York, New York. (1979).

Spehar 1981: Spehar, R.L., Lemke, A.E., et al., "Effects of Pollution on Freshwater Fish", Journal Water Pollution Control Federation, Vol. 53, No. 6, pp. 1028-1076. (June, 1981).

Stoss 1979: Stoss, F.W., Haines, T.A., "The Effects of Toluene on Embryos and Fry of the Japanese Medaka (Oryzias latipes) with a Proposal for Rapid Determination of Maximum Acceptable Toxicant Concentration", Environ. Pollut., Vol. 20, No. 2, pp. 139-148. (1979).

Streeter 1971: Streeter, V.L., Fluid Mechanics, Fifth Edition, McGraw-Hill Book Co., New York, New York. (1971).

Sussex 1977: Pedley, J.B., Rylance, J., Sussex-N.P.L. Computer Analysed Thermochemical Data: Organic and Organometallic Compounds, University of Sussex, Sussex, Brighton, England. (1977).

TCM 1979: General American Transportation Corporation, Tank Car Manual, Chicago, Illinois. (May, 1979).

TDGC 1980: Transport Canada, Transportation of Dangerous Goods Code, Vol. 1 (Lists), Vol. 2, Ottawa, Canada. (June, 1980).

Texaco MSDS: Texaco Canada Inc., Material Safety Data Sheet, Don Mills, Ontario. Not dated.

TLV 1983: American Conference of Governmental Industrial Hygienists, TLV*s Threshold Limit Values for Chemical Substances and Physical Agents in the Workroom Environment with Intended Changes for 1983-84, Cincinnati, Ohio. (1983).

Toxline (on-line) 1981: Toxline, Toxicology Information Program (1974 to present), National Library of Medicine, Bethesda, Maryland. (1981).

TPS 1978: GSR Fluid Handling, Thermoplastic Piping Systems, Sun Valley, California. (1978).

TSA 1980: Shuckrow, A.J., Pajak, A.P., Osheka, J.W., Concentration Technologies for Hazardous Aqueous Waste Treatment, Touhill, Shuckrow and Associates, Inc., Pittsburgh, Pennsylvania. (1980).

Verschueren 1977: Verschueren, K., Handbook of Environmental Data on Organic Chemicals, Van Nostrand Reinhold Company, New York, New York. (1977).

Water Management Goals 1978: Ontario Ministry of the Environment, Water Management Goals, Policies, Objectives and Implementation Procedures for the Ministry of the Environment, Toronto, Ontario, p. 48. (November, 1978).

WQC 1963: McKee, J.E., Wolf, H.W., Water Quality Criteria, Second Edition, Resources Agency of California, State Water Quality Control Board. (1963).

WQC 1972: National Academy of Sciences, Water Quality Criteria 1972: A Report of the Committee on Water Quality Criteria, Environmental Studies Board, National Academy of Sciences, Washington, D.C., p. 142. (1972).

WQCDB-1 1970: Environmental Protection Agency, Water Quality Criteria Data Book: Organic Chemical Pollution of Freshwater, A.D. Little Inc., U.S. Environmental Protection Agency, Water Quality Office, Washington, D.C., Vol. 1, p. 242. (1970).

WQCDB-3 1971: Environmental Protection Agency, Water Quality Criteria Data Book: Effects of Chemicals on Aquatic Life, U.S. Environmental Protection Agency, Water Quality Office, Washington, D.C., Vol. 3, p. 315, A-125. (May, 1971).

## 12.2 Bibliography

American Conference of Governmental Industrial Hygienists (ACGIH), Documentation of Threshold Limit Values, Fourth Edition, Cincinnati, Ohio. (1981).

American Conference of Governmental Industrial Hygienists, TLV*s Threshold Limit Values for Chemical Substances and Physical Agents in the Workroom Environment with Intended Changes for 1983-84, Cincinnati, Ohio. (1983).

American Petroleum Institute, Hazardous Substances Spill Contingency Planning Guide: Specific Materials: 2. Toluene, Prepared for API by Rockwell International, Newbury Park, California. (1982).

American Society for Testing and Materials, Compilation of Odor and Taste Threshold Values Data, ASTM, Philadelphia, Pennsylvania, ASTM Data Series DS-48A. (1980).

American Society for Testing and Materials, Annual Book of ASTM Standards, Part 26: Gaseous Fuels; Coal and Coke; Atmospheric Analysis, ASTM, Philadelphia, Pennsylvania, D3687-78. (1981).

American Water Works Association, Standard Methods for the Examination of Water and Wastewater, 14th Edition, American Public Health Association, Washington, D.C., pp. 515-521. (1976).

Bakke, T., Skjoldal, H.R., "Effects of Toluene on the Survival, Respiration and Adenylate System of a Marine Isopod", Marine Pollution Bulletin, Vol. 10, No. 4, pp. 111-115. (1979).

Baxter, H.G., Blakemore, R., Moore, J.P., "The Measurement of Airborne Benzene Vapour", Ann. Occup. Hyg., Vol. 23, p. 117. (1980).

BDM Corporation, The AAR Hazardous Materials Data Base, Prepared for the Association of American Railroads, Parts I and II, McLean, Virginia. (May, 1981).

Berry, W.O., "A Comparative Study of the Uptake of Toluene by Bluegill Sunfish (Lepomis macrochirus) and Crayfish (Orconectes rusticus)", Environ. Pollut. Ser. A. Ecol. Biol., Vol. 21, No. 2, pp. 109-120. (1980).

Blokker, P.C., Migration of Oil in Soil, Presented at International Conference "Antinquinamenta 71", Milan Fair of Anti-Pollution Equipment, Report No. 9/71, Milan, Italy. (November, 1971).

Bretherick, L., Handbook of Reactive Chemical Hazards, Second Edition, Butterworths, London, England. (1979).

Brown, R.A., Weiss, F.T., Fate and Effects of Poly-nuclear Aromatic Hydrocarbons in the Aquatic Environment, American Petroleum Institute, Washington, D.C. (September, 1978).

The Canadian Chemical Producers' Association, List of Members, Toronto, Ontario. (October, 1981).

Canadian Transport Commission, Regulations for the Transportation of Dangerous Commodities by Rail, published by Supply & Services Canada, Ottawa, Ontario. (1974).

Chiou, C.T., Schmedding, D.W., "Partitioning of Organic Compounds in Octanol-Water Systems", Environ. Sci. Technol., Vol. 16, No. 1, pp. 4-10. (1982).

Clayton, G.D., Clayton, F.E. (eds.), Patty's Industrial Hygiene and Toxicology, Vols. 2A, 2B, Third Revised Edition, John Wiley and Sons Canada Limited, Toronto, Ontario. (1981).

Corpus Information Services Ltd., "Toluene", Chemical Product Profiles, Don Mills, Ontario. (April, 1983).

Dean, J.A. (ed.), Lange's Handbook of Chemistry, 12th Edition, McGraw-Hill Book Company, New York, New York. (1979).

M.M. Dillon, Survey of Countermeasures Systems for Hazardous Material Spills, Environment Canada, Ottawa, Canada. (1982).

Dobbs, R.A., Cohen, J.M., Carbon Adsorption Isotherms for Toxic Organics, U.S. Environmental Protection Agency, Waste Water Research Division, Municipal Environmental Research Laboratory, Cincinnati, Ohio, EPA 600/8-80-023. (April, 1978).

DOM-X, DOM-X Plastic Pipe Engineering Data, Toronto, Ontario. (1967).

Dow Chemical Canada Inc., Emergency Response Information Sheet, Sarnia, Ontario. (23 July 1979).

Dow Chemical Canada Inc., Material Safety Data Sheet, Sarnia, Ontario. (30 July 1979).

Dow Chemical Company, Dow Chemical Resistance Guide for Dow Plastic Lined Piping Products, Midland, Michigan. (1978).

Dow Chemical Company, Dow Plastic Lined Piping Systems, Midland, Michigan, Brochure 178-102-72. (1972).

Eisenberg, N.A., Lynch, C.J., Kumar, R.M., A Critical Technical Review of Six Hazard Assessment Models, Enviro Control Inc., Rockville, Maryland. (December, 1975).

Elovaara, E., Hemminki, K., Vainio, H., "Effects of Methylene Chloride, Trichloroethane, Trichloroethylene, Tetrachloroethylene and Toluene on the Development of Chick Embryos", Toxicology, Vol. 12, No. 2, pp. 111-120. (1979).

Environmental Protection Agency, Supplement to Development Document: Hazardous Substances Regulations, Section 311 Federal Water Pollution Control Act, U.S. Environmental Protection Agency, Office of Water and Standards, Washington, D.C., EPA 440/9-75-009. (November, 1975).

Environmental Protection Agency, Treatability Manual, Volume V, Summary, U.S. Environmental Protection Agency, Office of Research and Development, Washington, D.C., EPA 600/8-80-042E. (July, 1980).

Environmental Protection Agency, TRW Systems Group, IERL-RTP Procedures Manual: Level of Environmental Assessment, Washington, D.C., EPA 600/2-76-160a. (June, 1976).

Environmental Protection Agency, Water Quality Criteria Data Book: Organic Chemical Pollution of Freshwater, A.D. Little Inc., U.S. Environmental Protection Agency, Water Quality Office, Washington, D.C., Vol. 1, p. 242. (1970).

Environmental Protection Agency, Water Quality Criteria Data Book: Effects of Chemicals on Aquatic Life, U.S. Environmental Protection Agency, Water Quality Office, Washington, D.C., Vol. 3, p. 315, A-125. (May, 1971).

Finachem Canada Inc., Toluene Production Data Sheet, Montreal, Quebec. (1981).

Finachem Canada Inc., Aromatic Solvents Production Information, Montreal, Quebec. (September, 1979).

Fingas, M.F., Duval, W.S., Stevenson, G.B., The Basics of Oil Spill Cleanup, Environment Canada, Ottawa, Canada. (1979).

Fingas, M.F., Sydor, M., Development of an Oil Spill Model for the St. Lawrence River, Technical Bulletin No. 116, Inland Waters Directorate, Environment Canada, Ottawa, Canada. (1980).

Freeze, R.A., Cherry, J.A., Groundwater, Prentice-Hall, Englewood Cliffs, New Jersey. (1979).

General American Transportation Corporation, Tank Car Manual, Chicago, Illinois. (May, 1979).

General Electric Company, Material Safety Data Sheets, Material Safety Information Services, Schenectady, New York. (August, 1979).

GF Plastic Systems Inc., GF Plastic Systems, Santa Ana, California. Not dated.

Graydon, W.F., "Benzene and Toluene Distribution in Toronto Atmosphere, J. Environ. Sci. Technol., Vol. 7, p. 628. (1973).

GSR Fluid Handling, Thermoplastic Piping Systems, Sun Valley, California. (1978).

Haque, R., Schmedding, D.W., Freed, U.H., "Aqueous Solubility, Adsorption and Vapour Behavior of Polychlorinated Biphenyl 1254", Environ. Sci. Technol., Vol. 8, No. 2. (February, 1974).

Hatayama, H.K., Chen, J.J., deVera, E.R., Stephens, R.D., Storm, D.L., A Method for Determining the Compatibility of Hazardous Wastes, Municipal Environmental Research Laboratory, Office of Research and Development, U.S. Environmental Protection Agency, Cincinnati, Ohio. (April, 1980).

Hester, N.E., Meyer, R.A., "A Sensitive Technique for Measurement of Benzene and Alkylbenzenes in Air", Environ. Sci. Technol., Vol. 13, No. 1, p. 107. (1979).

Huibregtse, K.R., et al., Manual for the Control of Hazardous Material Spills - Volume One - Spill Assessment and Water Treatment Techniques, U.S. Environmental Protection Agency, National Environmental Research Center, Cincinnati, Ohio, EPA 660/2-77-227. (November, 1977).

Hydraulic Institute, Hydraulic Institute Standards, 12th Edition, New York, New York. (1969).

Imperial Chemical Industries (ICI), Treatment of Organic Compounds, Appendix 7, Cheshire, England. (April, 1982).

International Labour Organization, Occupational Exposure Limits for Airborne Toxic Substances, Second (Revised) Edition, Geneva, Switzerland. (1980).

International Technical Information Institute, Toxic and Hazardous Industrial Chemicals Safety Manual for Handling and Disposal with Toxicity and Hazard Data, Japan. (1981).

Jenkins Brothers, Jenkins Corrosion Resistant Stainless Steel Valves, New York, New York. (1979).

Johnson, W.W., Finley, M.T., Handbook of Acute Toxicity of Chemicals to Fish and Aquatic Invertebrates, U.S. Fish and Wildlife Service, Washington, D.C., p. 85. (1980).

Jones, H.R., Environmental Control in the Organic and Petrochemical Industries, Noyes Data Corp., Park Ridge, New Jersey, pp. 8-25. (1971).

Jones, P.W., et al., Technical Manual for Analysis of Organic Materials in Process Streams, Battelle Columbus Laboratories, Columbus, Ohio. (January, 1976).

Juhnke, I., Luedemann, D., "Results of the Study of 200 Chemical Compounds on Acute Fish Toxicity Using the Golden Orfe Test", Z. Wasser Abwasser Forsch., Vol. 11, No. 5, pp. 161-164. (1978).

Kamilova, R.M., Khikmatov, A.K., Pazylova, S.S., Mukhamedova, K.M., "Response of Regional Cotton Varieties to Toluene During Germination", Uzb. Biol. Zh., No. 4, pp. 26-28. (1979).

Kirk-Othmer Encyclopedia of Chemical Technology, 3rd Edition, Vol. 23, John Wiley & Sons, New York. (1983).

Kreuzer, L.B., Kenyon, N.D., Patel, C.K.N., "Air Pollution: Sensitive Detection of Ten Pollutant Gases by Carbon Monoxide and Carbon Dioxide Lazers", Science, Vol. 177, p. 377. (1972).

Lefèvre, M.J., Becker, E.O., First Aid Manual for Chemical Accidents - For Use with Nonpharmaceutical Chemicals, Dowden, Hutchinson, and Ross Inc., Pennsylvania. (1980).

Lewis, R.J., Tatken, R.L., Registry of Toxic Effects of Chemical Substances, 1979, Vols. 1 and 2, National Institute for Occupational Safety and Health (NIOSH), Cincinnati, Ohio. (September, 1980).

Lowenheim, F.A., Moran, M.K., Faith, Keye's and Clark's Industrial Chemicals, Wiley-Interscience, New York, New York. (1975).

MacKay, D., Walkoff, R.W., "Rate of Evaporation of Low-Solubility Contaminants from Water Bodies to Atmosphere", Environ. Sci. Technol. , Vol. 7, No. 7. (July, 1973).

Manufacturing Chemists Association, Toluene, Washington, D.C. (1956).

McKee, J.E., Wolf, H.W., Water Quality Criteria, Second Edition, Resources Agency of California, State Water Quality Control Board. (1963).

National Academy of Sciences, Assessing Potential Ocean Pollutants, Washington, D.C. (1975).

National Academy of Sciences, Water Quality Criteria 1972: A Report of the Committee on Water Quality Criteria, Environmental Studies Board, National Academy of Sciences, Washington, D.C., p. 142. (1972).

National Association of Corrosion Engineers, Corrosion Data Survey, Houston, Texas. (1967).

National Fire Protection Association, Fire Protection Guide on Hazardous Materials, Seventh Edition, Boston, Massachusetts. (1978).

National Institute of Occupational Safety and Health, Manual of Analytical Methods, Second Edition, Vol. 3, S. 343., Cincinnati, Ohio. (April, 1977).

North Atlantic Treaty Organization (NATO), Manual on Hazardous Substances in Special Wastes, Federal Environmental Agency, Waste Management Division, Berlin, West Germany. (October, 1976).

Oil and Hazardous Materials Technical Assistance Data System, U.S. Environmental Protection Agency, Oil and Special Materials Control Division, Office of Water Program Operations, Washington, D.C. (1981).

Ontario Ministry of the Environment, "The Environmental Protection Act, Statutes of Ontario 1971", Chapter 86, as amended; and Regulation 15 (General) as amended. (1971).

Ontario Ministry of the Environment, Water Management Goals, Policies, Objectives and Implementation Procedures for the Ministry of the Environment, Toronto, Ontario, p. 48. (November, 1978).

Owen, T.C., Characterization of Organic Compounds by Chemical Methods, Marcel Dekker, Inc., New York, New York, p. 67. (1969).

Pedley, J.B., Rylance, J., Sussex-N.P.L. Computer Analysed Thermochemical Data: Organic and Organometallic Compounds, University of Sussex, Brighton, England. (1977).

Perry, R.H., Chilton, C.H. (eds.), Chemical Engineer's Handbook, Fifth Edition, McGraw-Hill Book Company, New York, New York. (1973).

Pickering, O.H., Henderson, C., "Acute Toxicity of Some Important Petrochemicals to Fish", Journal of Water Pollution Control Federation, Vol. 38, No. 9, pp. 1419-1429. (1966).

Pilie, R.J., et al., Methods to Treat, Control and Monitor Spilled Hazardous Materials, U.S. Environmental Protection Agency, National Environmental Research Center, Cincinnati, Ohio, EPA 670/2-75-042. (June, 1975).

Price, K.S., Waggy, G.T., Conway, R.A., "Brine Shrimp Bioassay and Seawater B.O.D. of Petrochemicals", Journal Water Pollution Control Federation, Vol. 46, No. 1. (January, 1974).

Raj, P.P.K., Lakekar, A.S., Assessment Models in Support of Hazard Assessment Handbook, Prepared for the Department of Transportation, U.S. Coast Guard, Washington, D.C., p. 238. (January, 1974).

Rosenstock, H.M., Draxl, K., Steiner, B., Herron, J.T., Energetics of Gaseous Ions, National Bureau of Standards, Washington, D.C. (1977).

Rouse, H., Fluid Mechanics for Hydraulic Engineers, Dover Publications, Inc., New York, New York. (1961).

Sax, N.I., Dangerous Properties of Industrial Materials, Fifth Edition, Van Nostrand Reinhold Company, New York, New York. (1979).

Shuckrow, A.J., Pajak, A.P., Osheka, J.W., Concentration Technologies for Hazardous Aqueous Waste Treatment, Touhill, Shuckrow and Associates, Inc., Pittsburgh, Pennsylvania. (1980).

Sittig, M., (ed.), Priority Toxic Pollutants, Health Impacts and Allowable Limits, Noyes Data Corp., New Jersey, pp. 334-337. (1980).

Southam Business Publications Ltd., "1981 Chemical Buyers' Guide", Canadian Chemical Processing, Vol. 64, No. 9, Don Mills, Ontario. (December, 1980).

Spehar, R.L., Lemke, A.E., et al, "Effects of Pollution on Freshwater Fish", Journal Water Pollution Control Federation, Vol. 53, No. 6, pp. 1028-1076. (June, 1981).

Stoss, F.W., Haines, T.A., "The Effects of Toluene on Embryos and Fry of the Japanese Medaka (Oryzias latipes) with a Proposal for Rapid Determination of Maximum Acceptable Toxicant Concentration", Environ. Pollut., Vol. 20, No. 2, pp. 139-148. (1979).

Streeter, V.L., Fluid Mechanics, Fifth Edition, McGraw-Hill Book Company, New York, New York. (1971).

Texaco Canada Inc., Material Safety Data Sheet, Don Mills, Ontario. Not dated.

Toxline, Toxicology Information Program, (1974 to present), National Library of Medicine, Bethesda, Maryland. (1981).

Transport Canada, Transportation of Dangerous Goods Code, Vol. 1 (Lists), Vol. 2, Ottawa, Canada. (June, 1980).

Uniroyal, Guide to Polymer Properties, Uniroyal Inc., Mishawaka, Indiana. Not dated.

United States National Research Council, The Alkyl Benzenes, Committee on Alkyl Benzene Derivatives, Board on Toxicology and Environmental Health Hazards, Assemble of Life Sciences, National Academy Press, Washington, D.C. (1981).

U.S. Department of Health and Human Services, National Institute for Occupational Safety and Health (NIOSH), U.S. Department of Labor, Occupational Safety and Health Administration (OSHA), Occupational Health Guidelines for Chemical Hazards, NIOSH Publication No. 81-123. (1981).

U.S. Department of Health, Education and Welfare, Pocket Guide to Chemical Hazards, United States Department of Health, Education, and Welfare, and U.S. Department of Labor, Washington, D.C. (1978).

U.S. Department of Transportation, CHRIS Hazard Assessment Handbook, U.S. Coast Guard, Washington, D.C., CG-446-3. (April, 1974).

U.S. Department of Transportation, Hazardous Materials, 1980 Emergency Response Guidebook, U.S. Department of Transportation, Research and Special Programs Administration, Materials Transportation Bureau, Washington, D.C. (1980).

U.S. Department of Transportation, Coast Guard, Chemical Hazards Response Information System (CHRIS), Washington, D.C. (1978).

Verschueren, K., Handbook of Environmental Data on Organic Chemicals, Van Nostrand Reinhold Company, New York, New York. (1977).

Weast, R.C. (ed.), CRC Handbook of Chemistry and Physics, 60th Edition, Chemical Rubber Publishing Company, Cleveland, Ohio. (1980).

World Information Systems, "Derailed Tank Cars Spill Sodium Hydroxide in Saskatchewan", Hazardous Material Intelligence Report, p. 4. (27 November 1981).

Yaws, C.L., "Physical and Thermodynamic Properties" Chemical Engineering, Vol. 82, No. 20, pp. 73-81. (29 September 1975).

## EnviroTIPS

### Common Abbreviations

| | |
|---|---|
| BOD | biological oxygen demand |
| b.p. | boiling point |
| CC | closed cup |
| cm | centimetre |
| CMD | count median diameter |
| COD | chemical oxygen demand |
| conc. | concentration |
| c.t. | critical temperature |
| eV | electron volt |
| g | gram |
| ha | hectare |
| Hg | mercury |
| IDLH | immediately dangerous to life and health |
| Imp. gal. | imperial gallon |
| in. | inch |
| J | joule |
| kg | kilogram |
| kJ | kilojoule |
| km | kilometre |
| kPa | kilopascal |
| kt | kilotonne |
| L | litre |
| lb. | pound |
| $LC_{50}$ | lethal concentration fifty |
| $LC_{LO}$ | lethal concentration low |
| $LD_{50}$ | lethal dose fifty |
| $LD_{LO}$ | lethal dose low |
| LEL | lower explosive limit |
| LFL | lower flammability limit |
| m | metre |
| *m* | meta |
| M | molar |
| MAC | maximum acceptable concentration |
| max | maximum |
| mg | milligram |
| MIC | maximum immision concentration |
| min | minute or minimum |
| mm | millimetre |
| µg | microgram |
| µm | micrometre |
| °Be | degrees Baumé (density) |
| MMAD | mass median aerodynamic diameter |
| MMD | mass median diameter |
| m.p. | melting point |
| MW | molecular weight |
| N | newton |
| NAS | National Academy of Sciences |
| NFPA | National Fire Protection Association |
| NIOSH | National Institute for Occupational Safety and Health |
| nm | nanometre |
| *o* | ortho |
| OC | open cup |
| *p* | para |
| $P_c$ | critical pressure |
| PEL | permissible exposure level |
| pH | measure of acidity/alkalinity |
| ppb | parts per billion |
| ppm | parts per million |
| $P_s$ | standard pressure |
| psi | pounds per square inch |
| s | second |
| STEL | short-term exposure limit |
| STIL | short-term inhalation limit |
| $T_c$ | critical temperature |
| $TC_{LO}$ | toxic concentration low |
| $T_d$ | decomposition temperature |
| $TD_{LO}$ | toxic dose low |
| $TL_m$ | median tolerance limit |
| TLV | Threshold Limit Value |
| $T_s$ | standard temperature |
| TWA | time weighted average |
| UEL | upper explosive limit |
| UFL | upper flammability limit |
| VMD | volume mean diameter |
| v/v | volume per volume |
| w/w | weight per weight |